

N-Channel Enhancement Mode Field Effect Transistor in a PDFN3 3A-8L Plastic Package.

$V_{DS} (V) = 40V$



$I_D = 82A (V_{GS} = \pm 20V)$

$R_{DS(ON)} @ 10V \ 3mR (Typ. 2.5mR)$

$R_{DS(ON)} @ 4.5V \ 5mR (Typ. 3.5mR)$

HF Product.

Load Switch Applications, Battery Power Management.

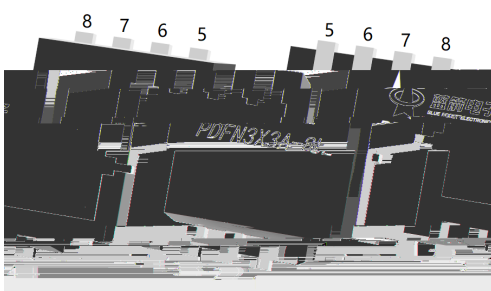

| 出脚 | 定义 |
|------|----|
| Pin1 | S |
| Pin2 | S |
| 4 | S |
| 5 | S |
| 6 | S |
| 7 | S |
| 8 | S |

See Marking Instructions.

| Parameter | | Symbol | Rating | Unit |
|---|--------------|-----------------------------|------------|------|
| Drain-Source Voltage | | V_{DSS} | 40 | V |
| Drain Current | | $I_D(T_C=25^\circ\text{C})$ | 57 | A |
| Drain Current - Pulsed | | I_{DM} | 137 | A |
| Gate-Source Voltage | | V_{GSS} | ± 20 | V |
| Single Pulsed Avalanche Energy | | E_{AS} | 348 | mJ |
| Avalanche Current | | I_{AS} | 33 | A |
| Power Dissipation | | $P_D(T_C=25^\circ\text{C})$ | 37 | W |
| Operating and Storage Temperature Range | | T_J, T_{stg} | -55 to 150 | |
| Junction-to-Ambient | $t = 10$ | R_{JA} | 42 | /W |
| Junction-to-Ambient | Steady-State | | 78 | |
| Junction-to-Case | Steady-State | R_{JC} | 3.4 | |

| Parameter | Symbol | Test Conditions | | Min | Typ | Max | Unit |
|------------------------------------|---------------|----------------------------|-------------------------------|-----|------|-----------|---------|
| Drain-Source Breakdown Voltage | BV_{DSS} | $V_{GS}=0V$ | $I_D=250\mu A$ | 40 | 47 | | V |
| Zero Gate Voltage Drain Current | I_{DSS} | $V_{DS}=40V$ | $V_{GS}=0V$ | | | 1 | μA |
| Gate-Body Leakage Current Forward | I_{GSS} | $V_{GS}=\pm 20V$ | $V_{DS}=0V$ | | | ± 0.1 | μA |
| Gate Threshold Voltage | $V_{GS(th)}$ | $V_{DS}=V_{GS}$ | $I_D=250\mu A$ | 1.0 | 1.7 | 3.0 | V |
| Static Drain-Source On-Resistance | $R_{DS(on)}$ | $V_{GS}=10V$ | $I_D=20A$ | | 2.5 | 3 | m |
| | | $V_{GS}=4.5V$ | $I_D=10A$ | | 3.5 | 5 | m |
| Drain-Source Diode Forward Voltage | V_{SD} | $V_{GS}=0V$ | $I_S=1A$ | | | 1.2 | V |
| Input Capacitance | C_{iss} | $V_{DS}=25V$ $f=1.0MHz$ | $V_{GS}=0V$ | | 9600 | | pF |
| Output Capacitance | C_{oss} | | | | 740 | | |
| Reverse Transfer Capacitance | C_{rss} | | | | 650 | | |
| Gate resistance | R_g | $V_{GS}=0V$ $f=1MHz$ | $V_{DS}=0V$ | | 1.3 | | |
| Total Gate Charge | $Q_{g(10V)}$ | $V_{GS}=10V$ $I_D=20A$ | $V_{DS}=20V$ | | 51 | | nC |
| Total Gate Charge | $Q_{g(4.5V)}$ | | | | 23 | | |
| Gate Source Charge | Q_{gs} | | | | 13.2 | | |
| Gate Drain Charge | Q_{gd} | | | | 3.1 | | |
| Turn-On Delay Time | $t_{d(on)}$ | $V_{GS}=10V$ $R_L=1$ | $V_{DS}=20V$ $R_{GEN}=3.0$ | | 11 | | ns |
| Turn-On Rise Time | t_r | | | | 11 | | |
| Turn-Off Delay Time | $t_{d(off)}$ | | | | 40 | | |
| Turn-Off Fall Time | t_f | | | | 10 | | |

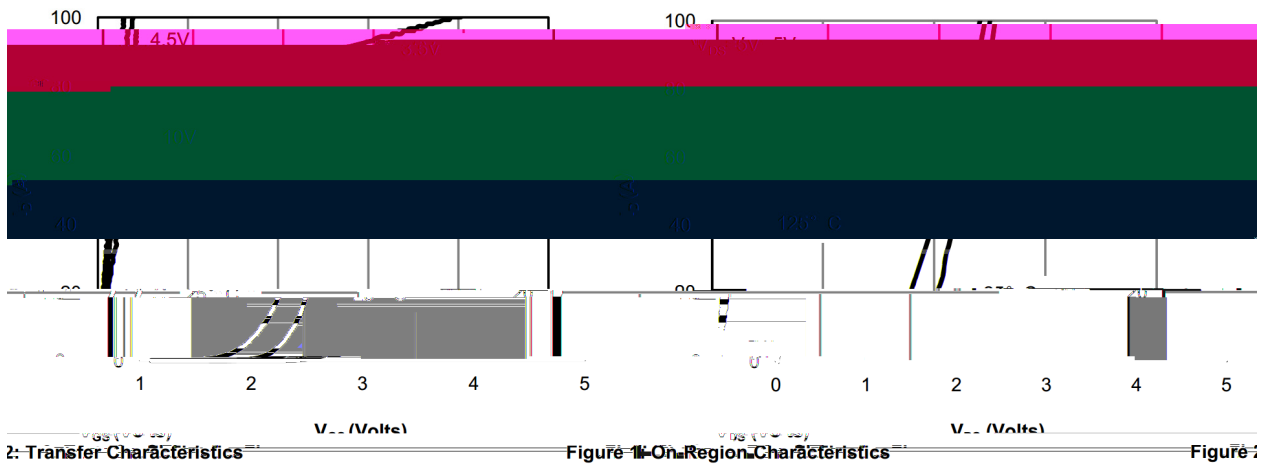


Figure 1: On-Region Characteristics

Figure 2: Transfer Characteristics

Figure 3: On-Region Characteristics

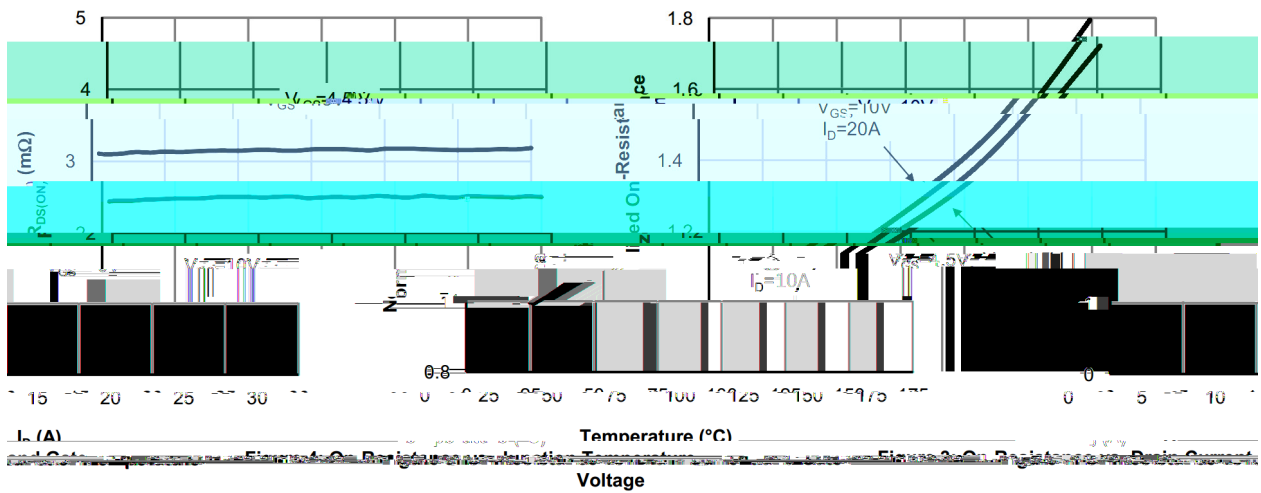


Figure 2: On-Region Characteristics

Figure 3: On-Region Characteristics

Figure 4: On-Region Characteristics

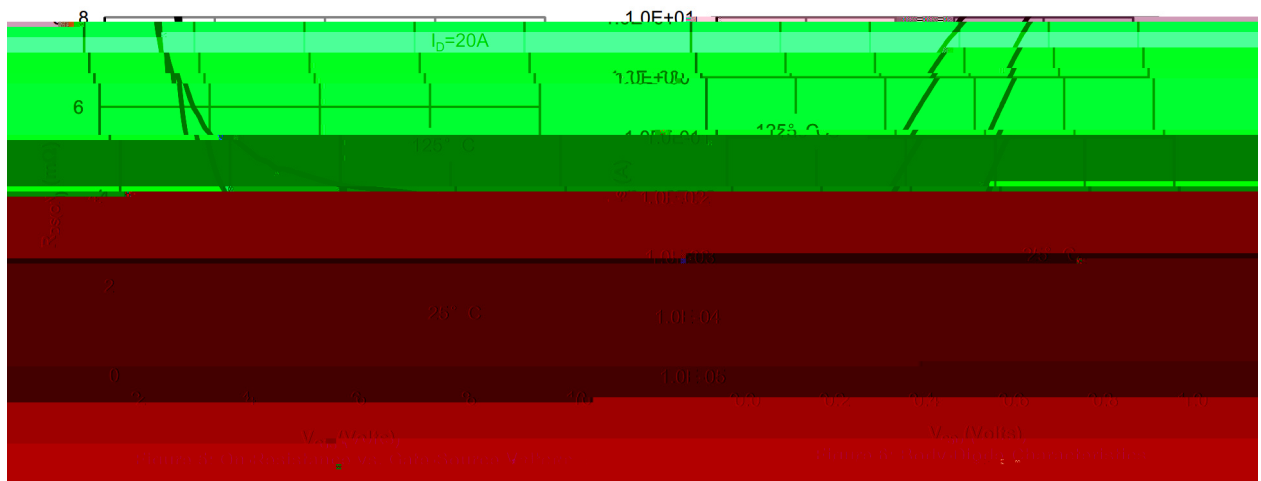


Figure 3: On-Region Characteristics

Figure 4: On-Region Characteristics

Figure 5: On-Region Characteristics

/



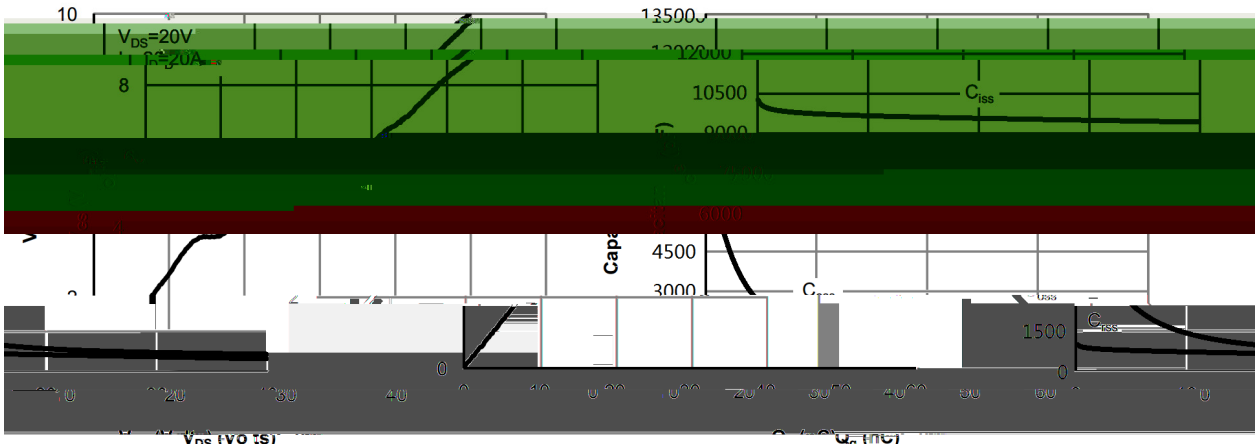



Figure 6: Capacitance C_{gs} Characteristics

Figure 7: Gate Charge Q_g Characteristics

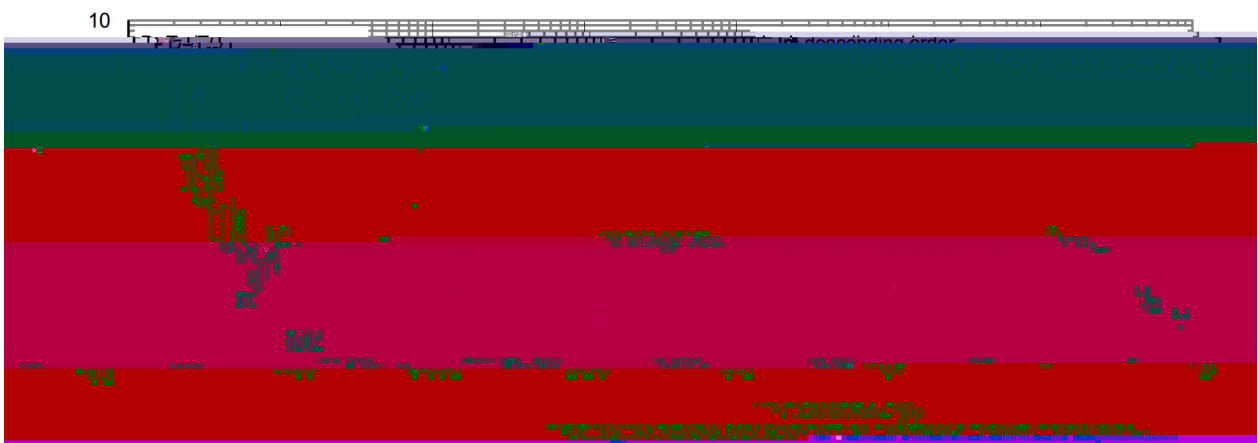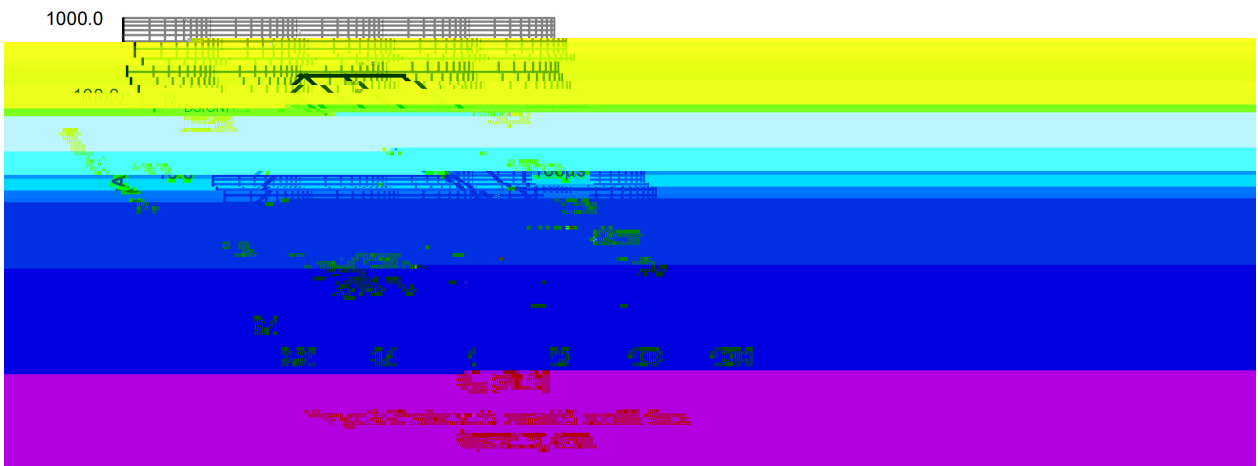


PDFN3X3A-8L

Unit:mm

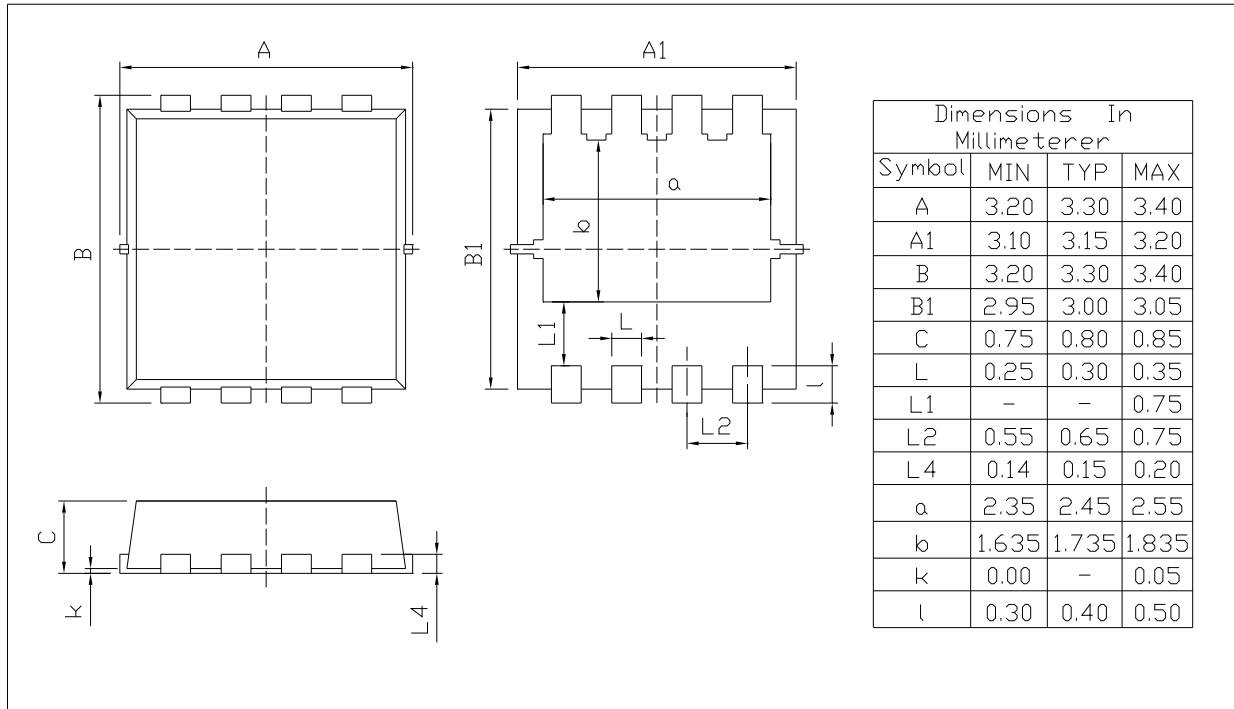

Rev.00 202011

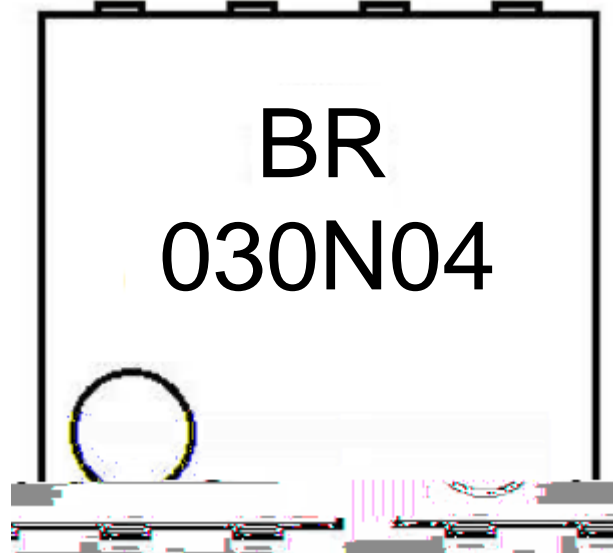

BR


030N04

Note:

BR: Company Code

030N04: Product Type Code

****: Lot No. Code, code change with Lot No

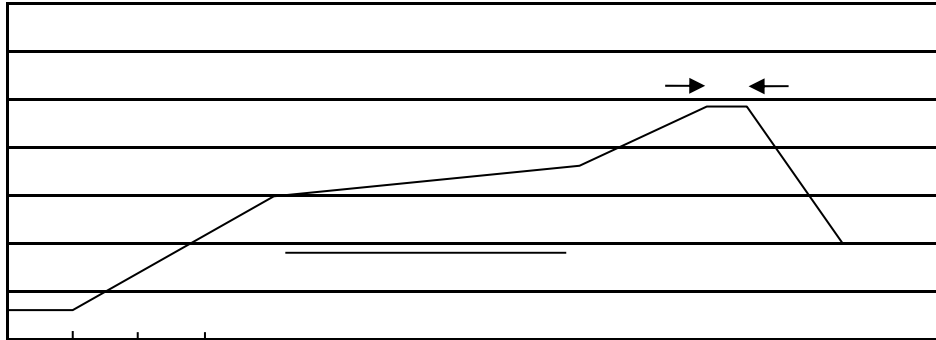Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

- | | | | | | |
|---|-----|-----|----|----------|---|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245 | 5 | 5 | 0.5sec; | 2.Peak Temp.:245 5 , Duration:5 0.5sec. |
| 3 | | | 2 | 10 /sec. | 3. Cooling Speed: 2~10 /sec. |

260 5 10 1 sec. Temp.:260±5 Time:10±1 sec

/ REEL

| Package Type | Units | | | | | Dimension (unit mm ³) | | |
|--------------|------------|-----------------|-----------------|-----------------------|-----------------|-----------------------------------|-----------|-----------|
| | Units/Reel | Reels/Inner Box | Units/Inner Box | Inner Boxes/Outer Box | Units/Outer Box | Reel | Inner Box | Outer Box |
| | | | | | | | | |