



A	2020.11.26	ALL	BRCS80N 03DP		

## / Descriptions

DFN 3\*3A-8L N MOS

N-Channel Enhancement Mode Field Effect Transistor in a DFN 3\*3A-8L Plastic Package.

## / Features

$V_{DS} (V) = 30V$

$I_D = 40 A (V_{GS} = \pm 20V)$

$R_{DS(ON)} @ 10V \leq 6mR (Typ. 4.7mR)$


。 HF Product.

## / Applications


DC/DC

These devices are well suited for high efficiency switching DC/DC converters and switch mode power supplies.

## / Equivalent Circuit



## / Pinning

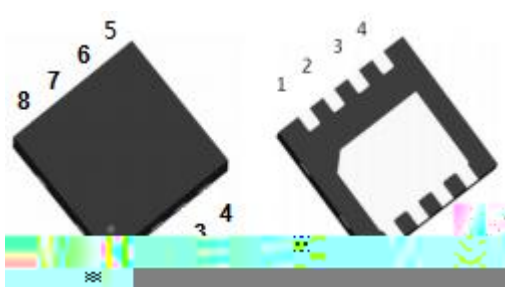

出脚	定义
1	Drain
2	Gate
3	Gate
4	Gate
5	Drain
6	Drain
7	Drain
8	Drain

## / Marking

See Marking Instructions.



Parameter		Symbol	Rating	Unit
Drain-Source Voltage		$V_{DSS}$	30	V
Drain Current		$I_D(T_C=25^\circ\text{C})$	40	A
Drain Current - Pulsed		$I_{DM}$	130	A
Gate-Source Voltage		$V_{GSS}$	$\pm 20$	V
Single Pulsed Avalanche Energy		$E_{AS}$	211	mJ
Avalanche Current		$I_{AS}$	23	A
Power Dissipation		$P_D(T_C=25^\circ\text{C})$	29	W
Operating and Storage Temperature Range		$T_J, T_{stg}$	-55 to 150	
Junction-to-Ambient	$t \leq 10$	$R_{JA}$	40	$^\circ\text{C/W}$
Junction-to-Ambient	Steady-State		75	
Junction-to-Case	Steady-State	$R_{JC}$	4.2	

**BRCS060N03ZB**

Rev.A Nov.-2020

**DATA SHEET**



**BRCS060**





**( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)**



**Note:**

- |   |             |           |  |
|---|-------------|-----------|--|
| 1 | 150 180     | 60 90sec; | 1.Preheating:150~180°C, Time:60~90sec.   |
| 2 | 245±5       | 5±0.5sec; | 2.Peak Temp.:245±5°C, Duration:5±0.5sec. |
| 3 | 2 10°C/sec. |           | 3. Cooling Speed: 2~10°C/sec.            |

**/ Resistance to Soldering Heat Test Conditions**

260±5°C                      10±1 sec.                      Temp.:260±5                      Time:10±1 sec

**/ Packaging SPEC.**

**/ REEL**

Package Type	Units					Dimension (unit: mm <sup>3</sup> )		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box fl	Outer Box L
DFN 3*3A-8L	5000	2	10000	6	60000	13" x12	360x360x50	380x335x366