

Rev.C Aug.-2023

SOT-363            NPN + PNP





Silicon NPN and PNP transistor in a SOT-363 Plastic Package.


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	$V_{CBO}$	180	V
Collector to Emitter Voltage	$V_{CEO}$	160	V
Emitter to Base Voltage	$V_{EBO}$	6.0	V
Collector Current	$I_C$	200	mA
Power Dissipation	$P_D$	200	mW
Thermal Resistance, Junction to Ambient	$R_{JA}$	625	/W
Junction and Storage Temperature	$T_j, T_{stg}$	-55 +150	

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	$V_{CBO}$	-180	V


Parameter	Symbol	Test Conditions	Min	Typ
-----------	--------	-----------------	-----	-----

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cut-Off Current	$I_{CBO}$	$V_{CB}=-180V$ $I_E=0$			-0.1	$\mu A$
Emitter Cut-Off Current	$I_{EBO}$	$V_{EB}=-6.0V$ $I_C=0$			-0.1	$\mu A$
DC Current Gain	$h_{FE(1)}$	$V_{CE}=-5.0V$ $I_C=-10mA$	100	200	300	
	$h_{FE(2)}$	$V_{CE}=-5.0V$ $I_C=-50mA$	20	70		
	$h_{FE(3)}$	$V_{CE}=-5.0V$ $I_C=-1.0mA$	40	180		
Collector-Emitter Saturation Voltage	$V_{CE(sat) (1)}$	$I_C=-10mA$ $I_B=-1.0mA$		-0.12	-0.4	V
	$V_{CE(sat) (2)}$	$I_C=-50mA$ $I_B=-5.0mA$		-0.5	-0.8	V
Base-Emitter Saturation Voltage	$V_{BE(sat) (1)}$	$I_C=-10mA$ $I_B=-1.0mA$		-0.75	-1.0	V
	$V_{BE(sat) (2)}$	$I_C=-50mA$ $I_B=-5.0mA$		-0.8	-1.0	V
Base-Emitter Voltage	$V_{BE}$	$V_{CE}=-5.0V$ $I_C=-10mA$		-0.7	-0.75	V
Transition Frequency	$f_T$	$V_{CE}=-10V$ $I_C=-10mA$	50	80		MHz
Collector Output Capacitance	$C_{ob}$					

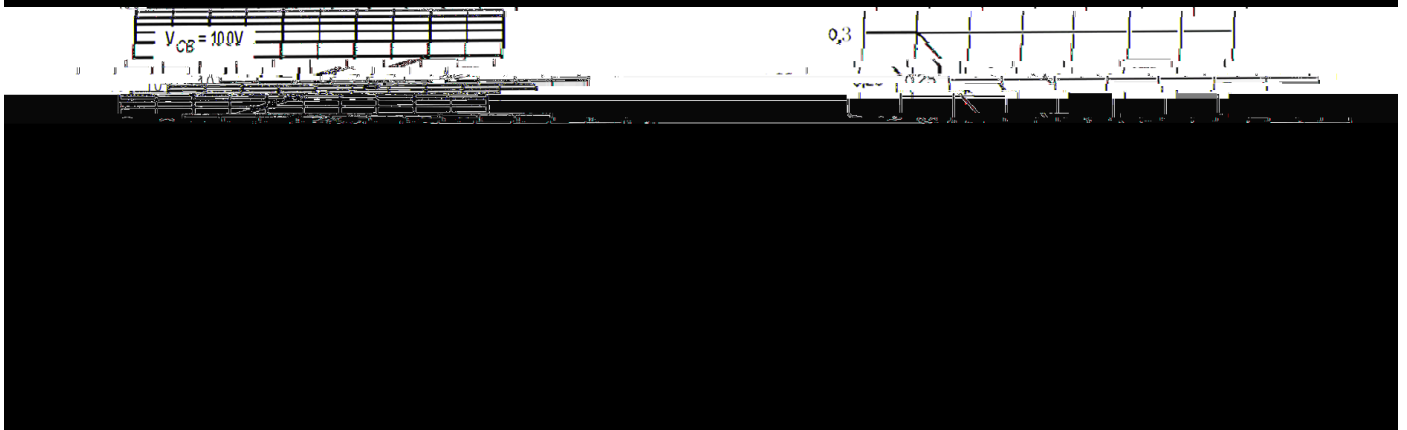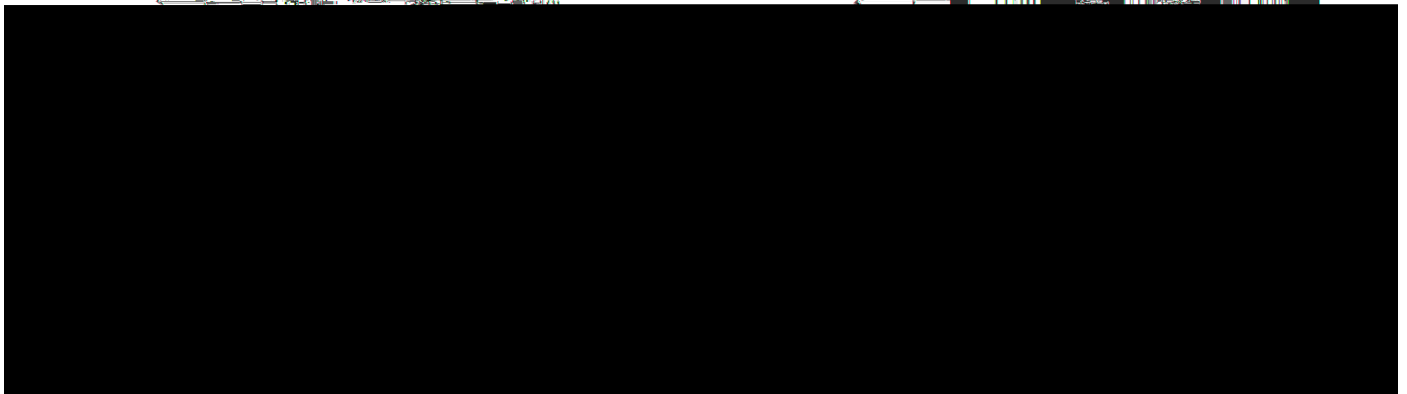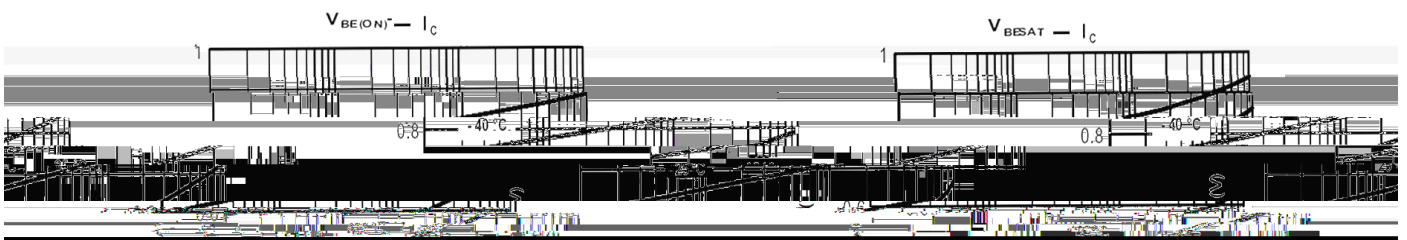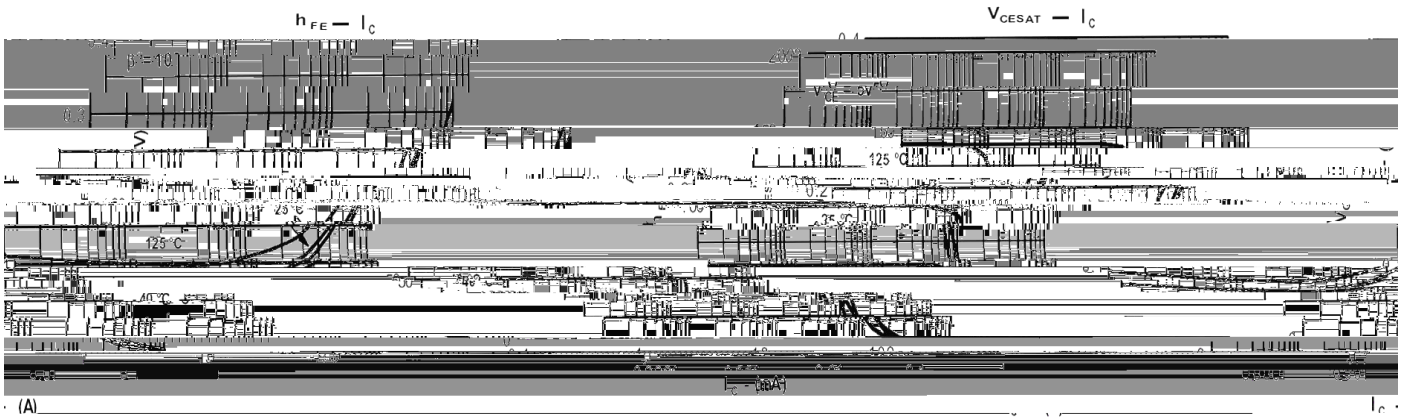

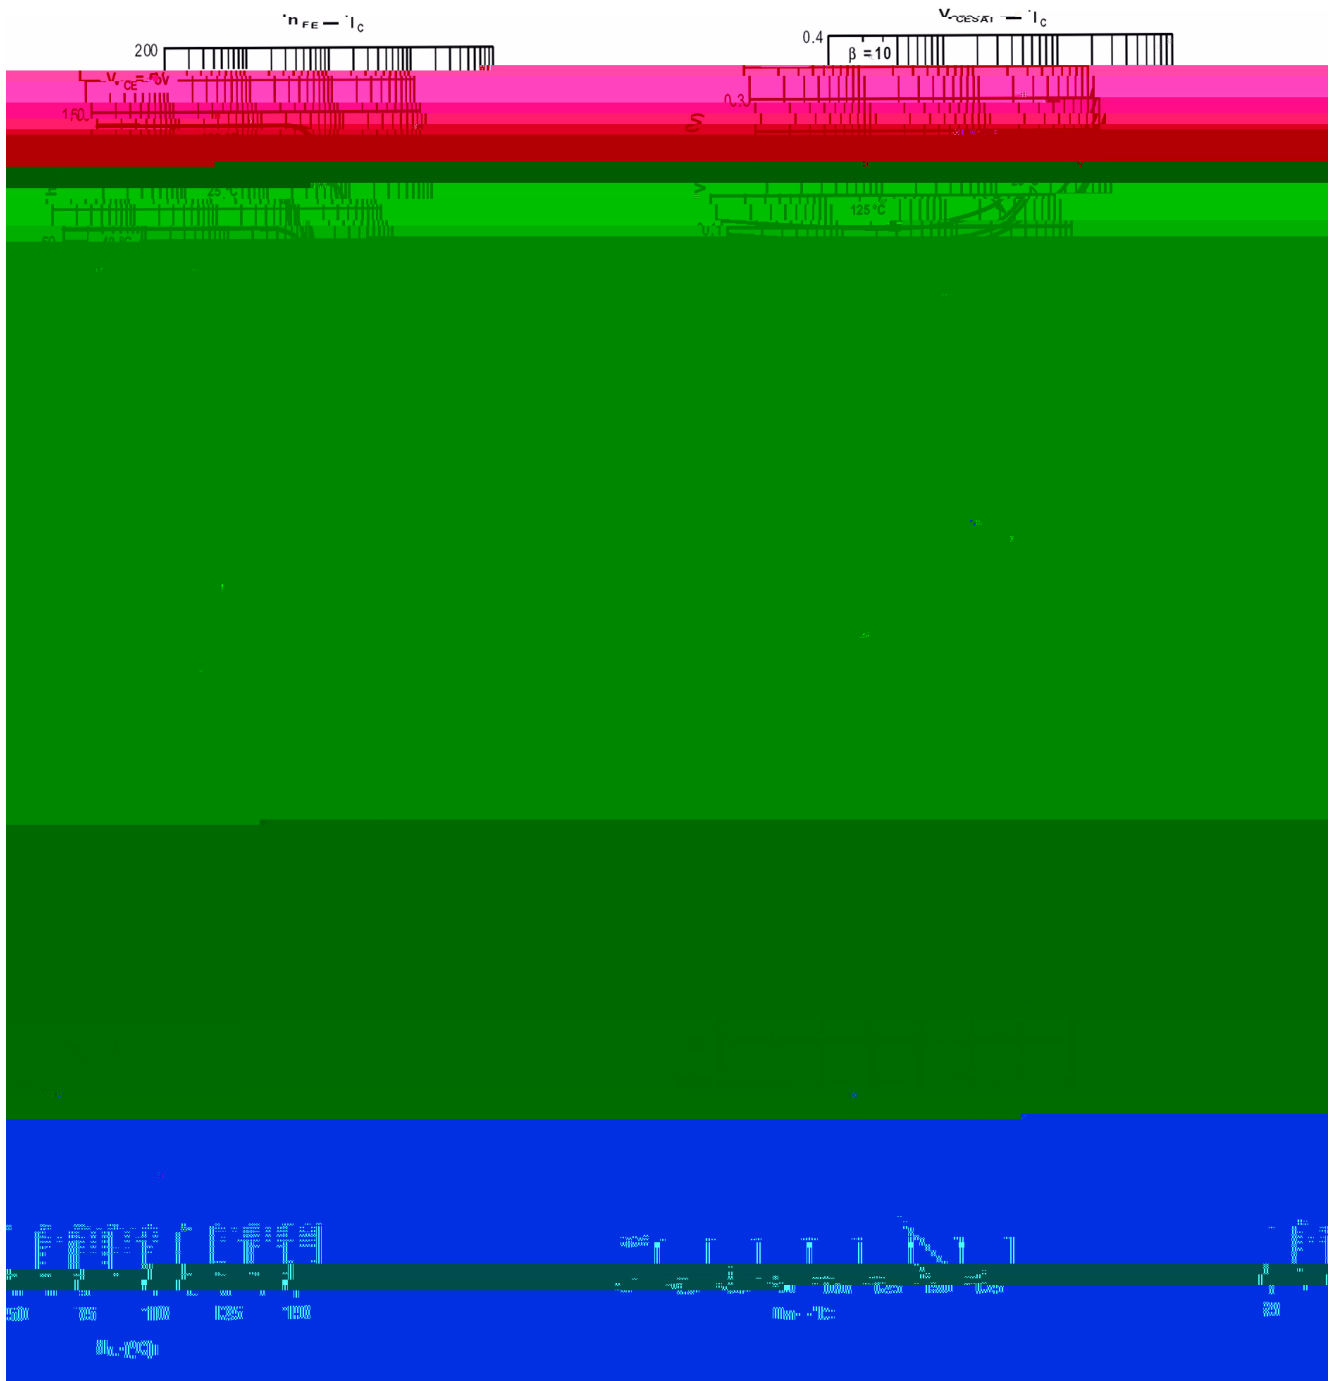



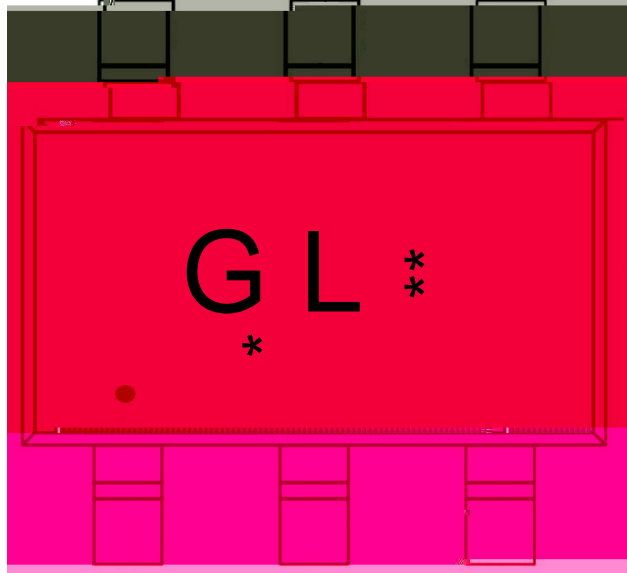

" 1"

GL

\*\*\*;

Note:



" 1" Pin

GL

Product Type Code

\*\*\*;

Lot No. Code, code change with Lot No




- |   |         |           |       |   |
|---|---------|-----------|-------|---|
| 1 | 150 180 | 60 90sec; | Note: | 1.Preheating:150~180 , Time:60~90sec.   |
| 2 | 245±5   | 5±0.5sec; |       | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | 2 10    | /sec.     |       | 3. Cooling Speed: 2~10 /sec.            |

260±5	10±1 sec.	Temp.:260±5	Time:10±1 sec
-------	-----------	-------------	---------------

/ REEL