


Rev.F Apr.-2017


SOT-23


NPN

Silicon NPN transistor in

Parameter	Symbol	Rating	Unit
-----------	--------	--------	------

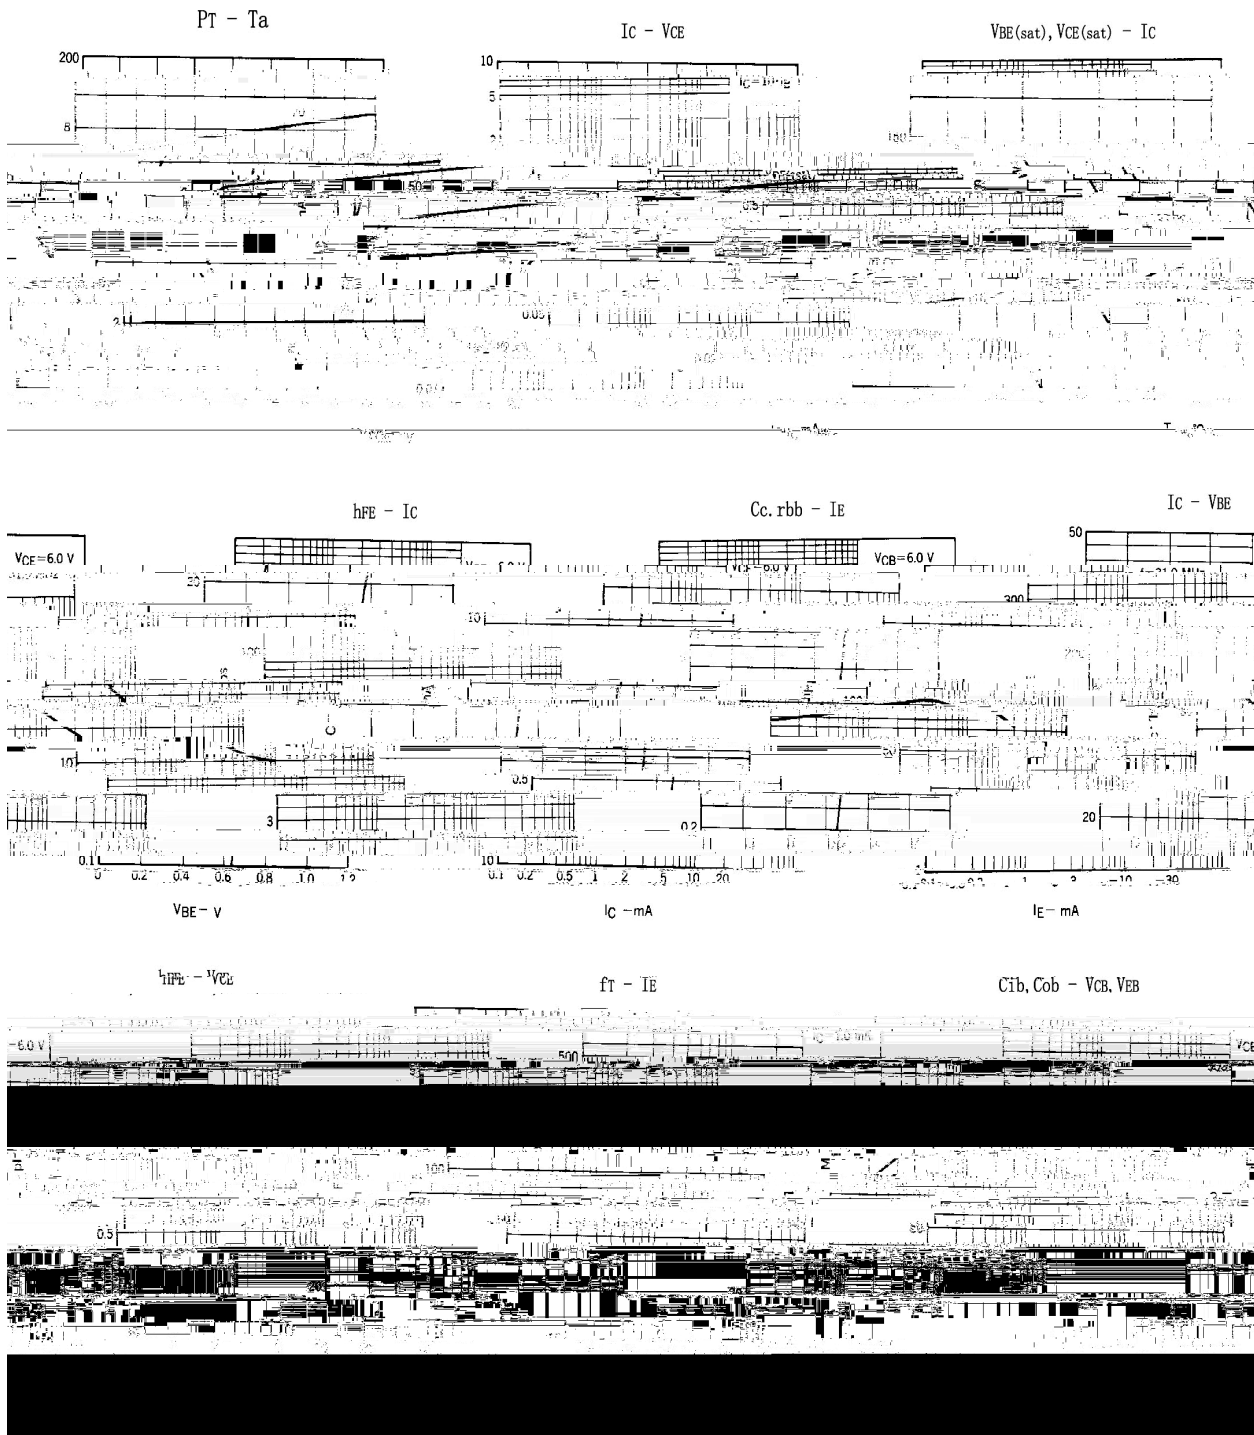

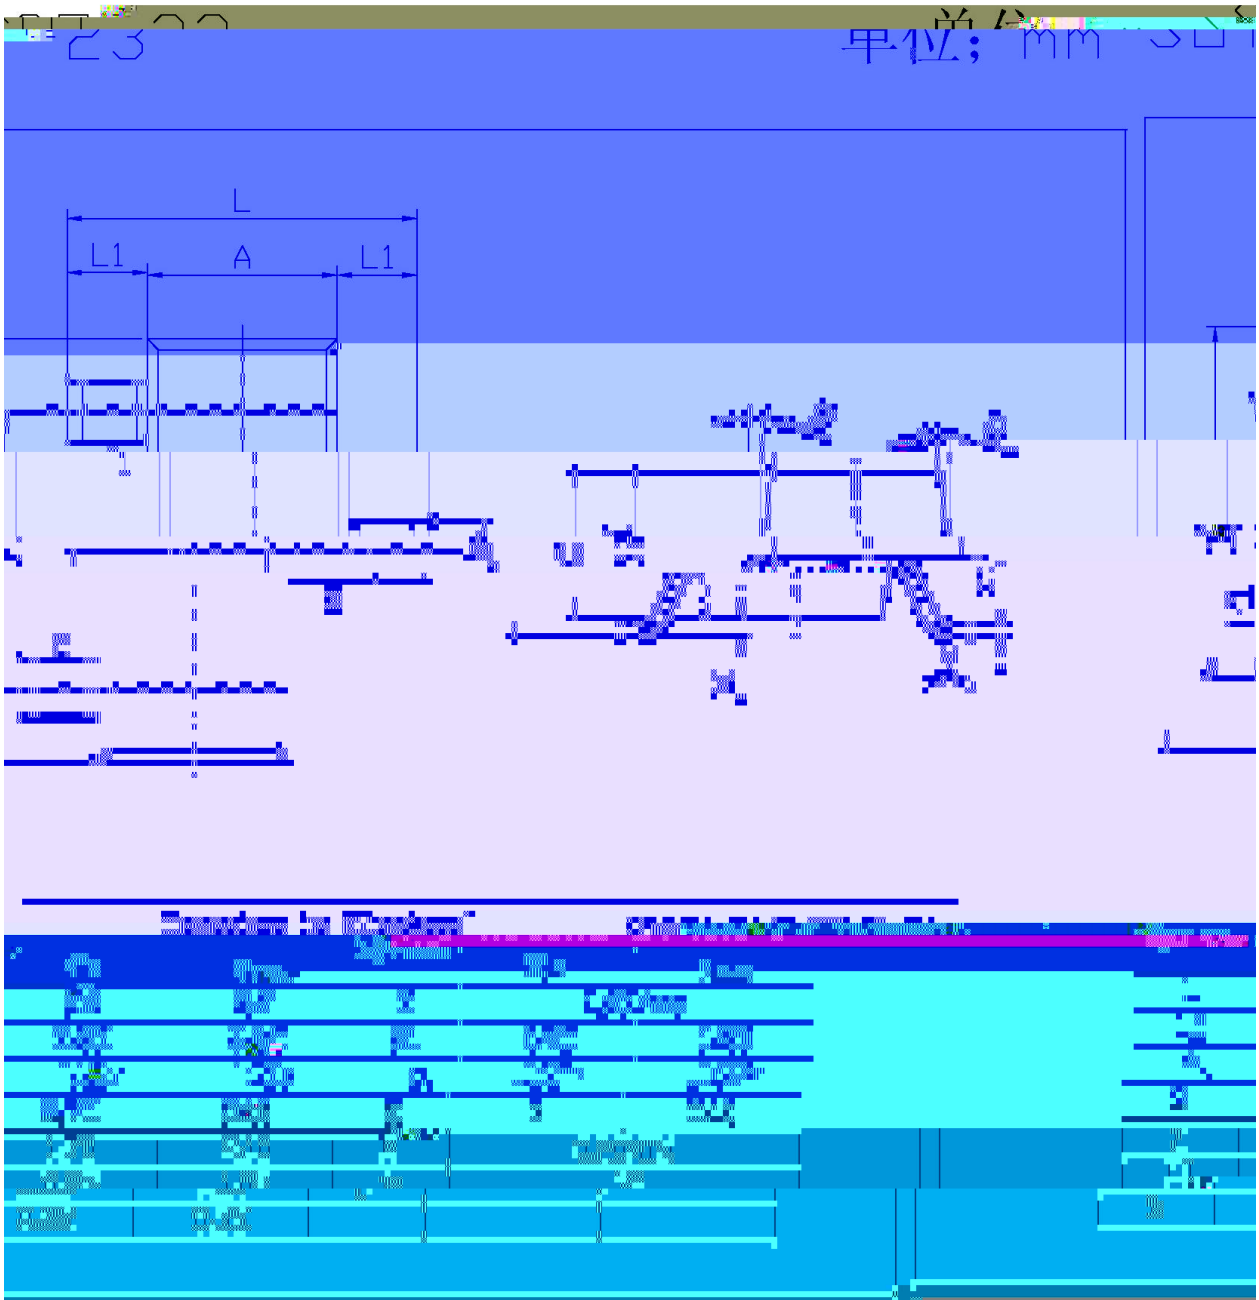

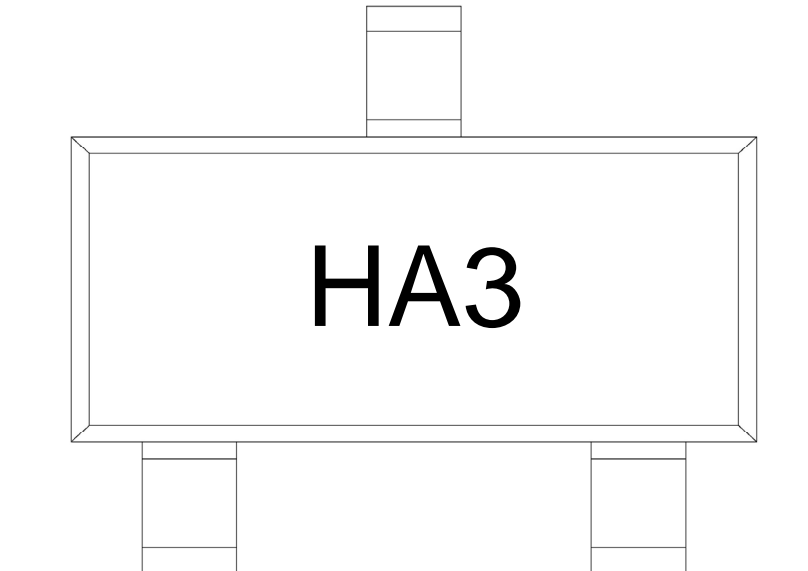


H

A3

Note:

H: Company Code

A3: Product Type Code

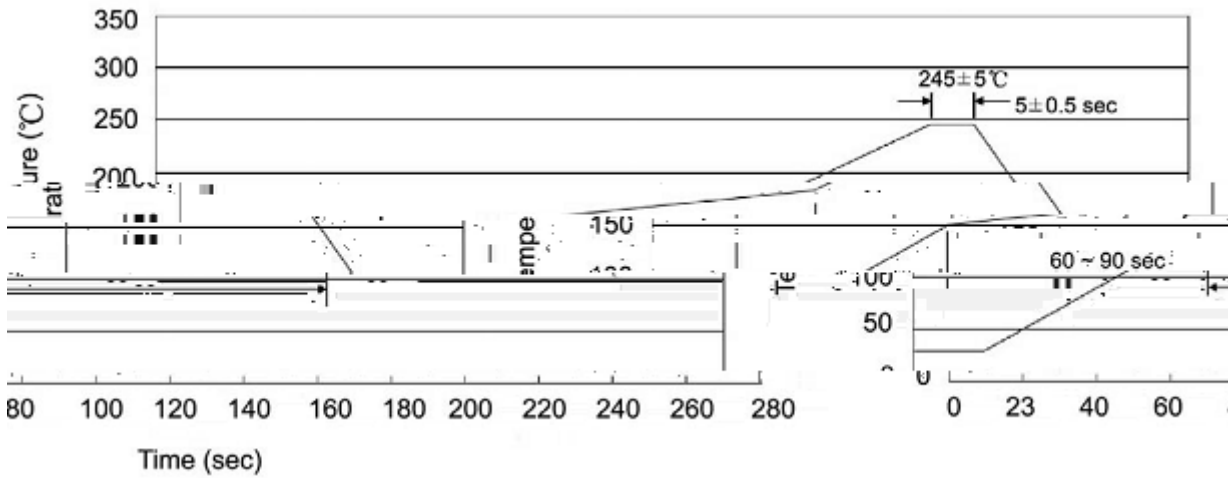**Temperature Profile for IR Reflow Soldering(Pb-Free)**

**Note:**

- |   |       |     |    |           |                                         |
|---|-------|-----|----|-----------|-----------------------------------------|
| 1 | 25    | 150 | 60 | 90sec;    | 1.Preheating:25~150 , Time:60~90sec.    |
| 2 | 245±5 |     |    | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 |       |     | 2  | 10 /sec.  | 3. Cooling Speed: 2~10 /sec.            |

 $260 \pm 5$ 
 $10 \pm 1 \text{ sec.}$ 

 Temp.: $260 \pm 5$ 

 Time: $10 \pm 1 \text{ sec}$ 

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm <sup>3</sup> )		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205