

/ Descriptions

Silicon NPN transistor in a TO-126F Plastic Package.

/ Features

Complementary pair with 2SA715.


/ Applications

Low frequency power amplifier.

/ Equivalent Circuit



/ Pinning




PIN1 Emitter PIN 2 Collector PIN 3 Base

/ h_{FE} Classifications & Marking

h_{FE} Classifications Symbol	B	C	D
h_{FE} Range	60 120	100 200	160 320

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	35	V


/ Electrical Characteristic Curve

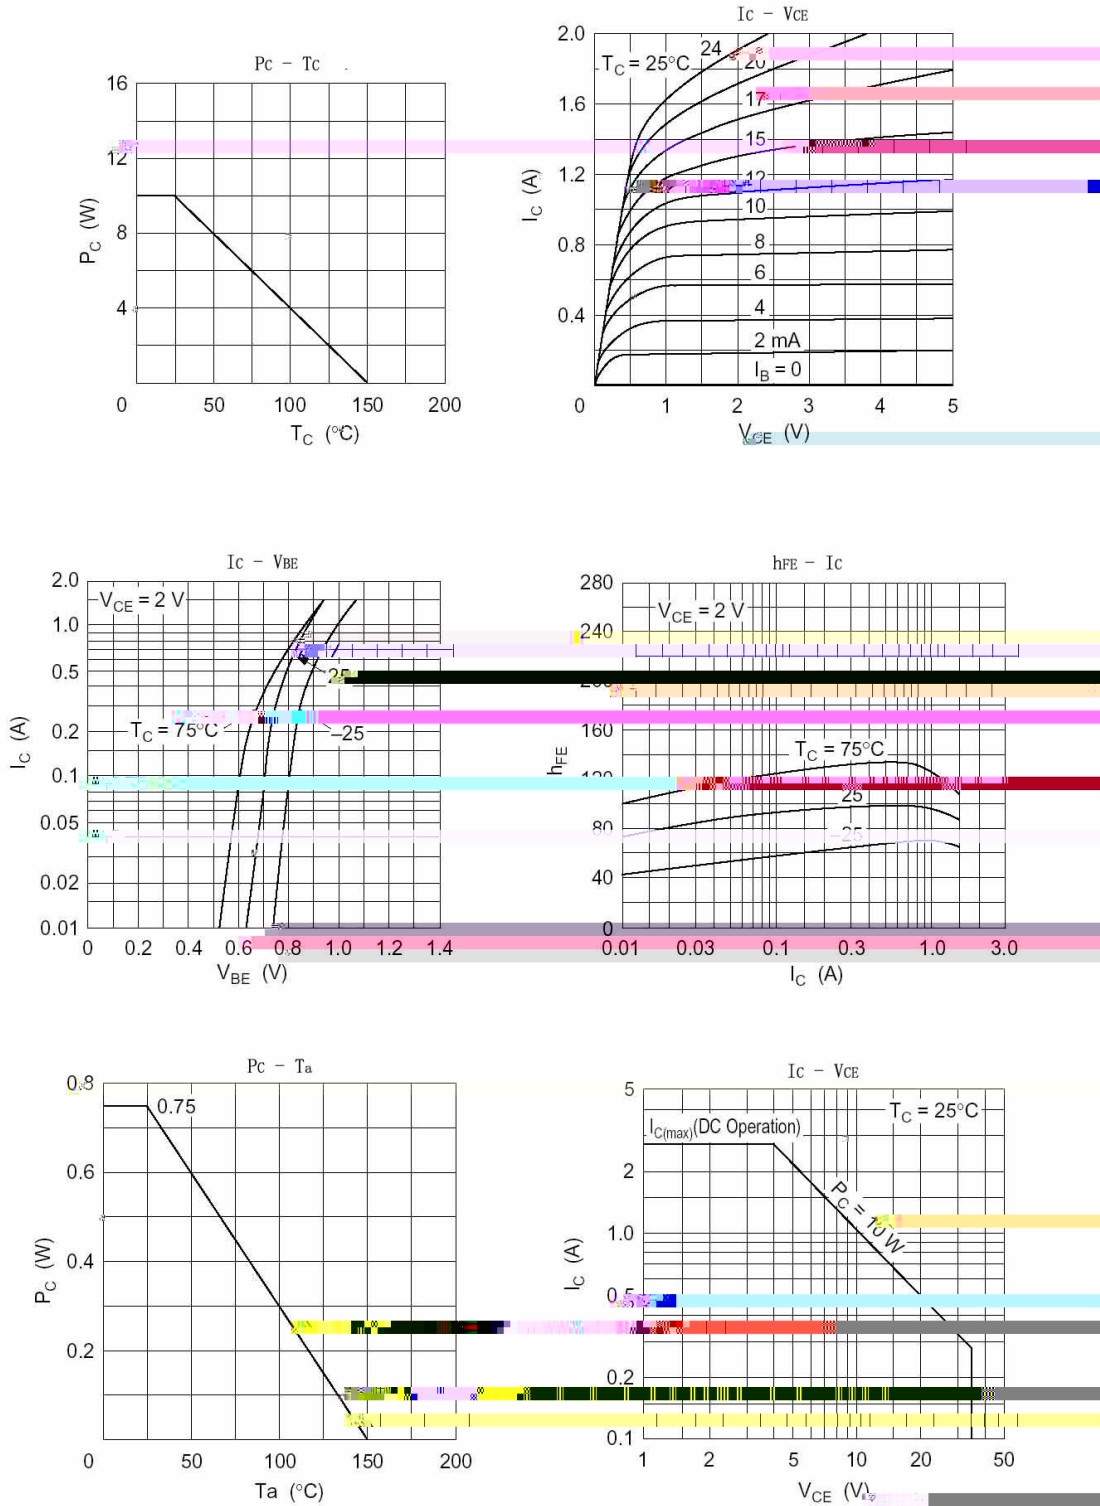


/ Package Dimensions

TU-126F


单位: mm

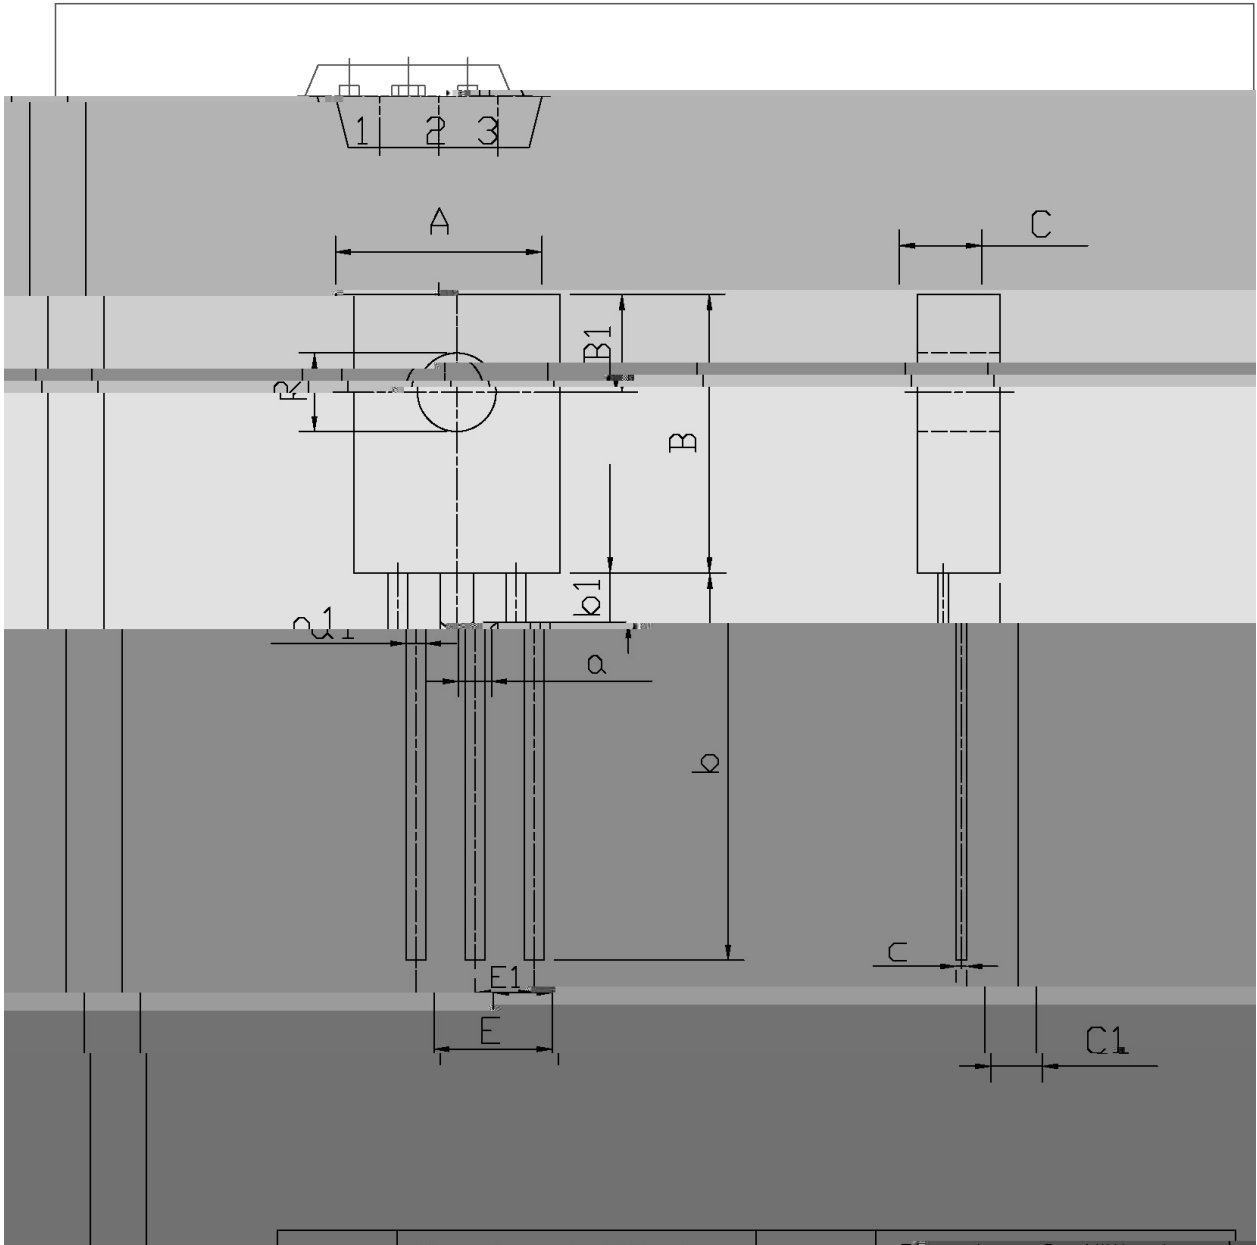

Symbol	Min	Max	Symbol	Min	Max
A	7.8	8.2	a1	0.65	
B	10.0	10.0			

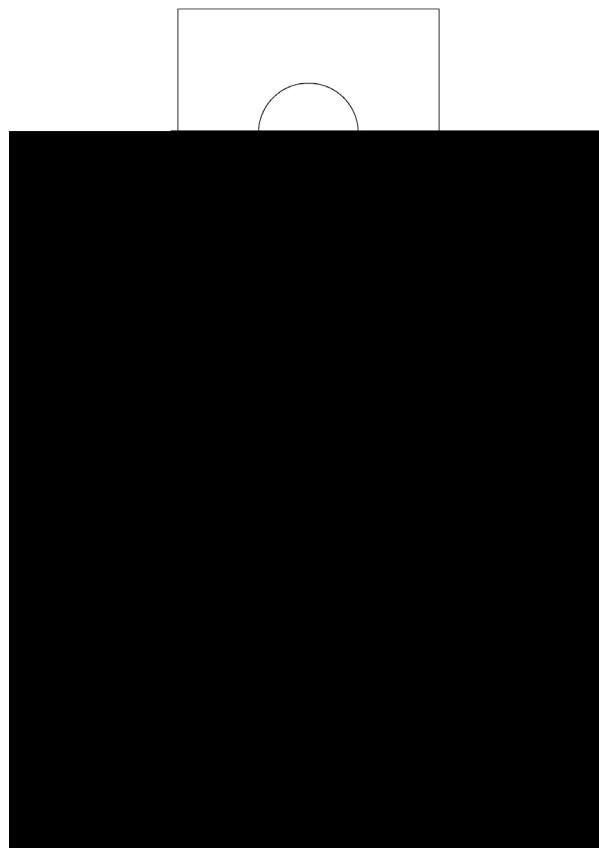

() / Temperature Profile for Dip Soldering(Pb-Free)

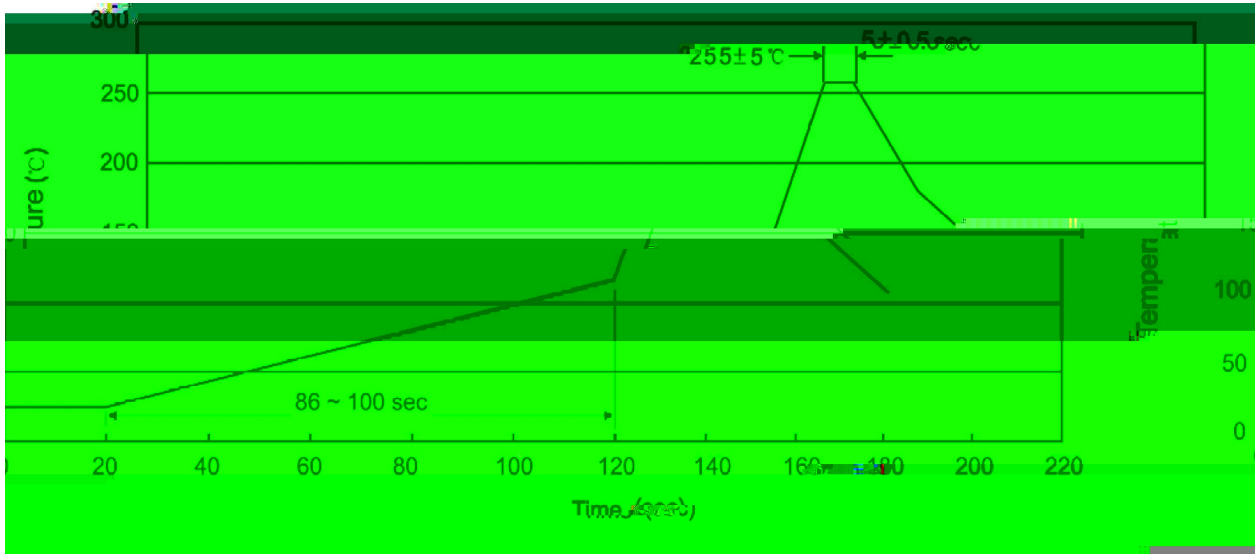

Note:

- | | | | | | |
|---|-----|-----|----|----------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255 | 5 | 5 | 0.5sec; | 2.Peak Temp.:255 5 , Duration:5 0.5sec. |
| 3 | | | 2 | 10 /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

270 5 10 1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units				Dimension (unit mm ³)		

/ TUBE

Package Type	Units				Dimension (unit mm ³)		