



---


Parameter

Symbol

Rating

Unit


**/ Electrical Characteristic Curve**

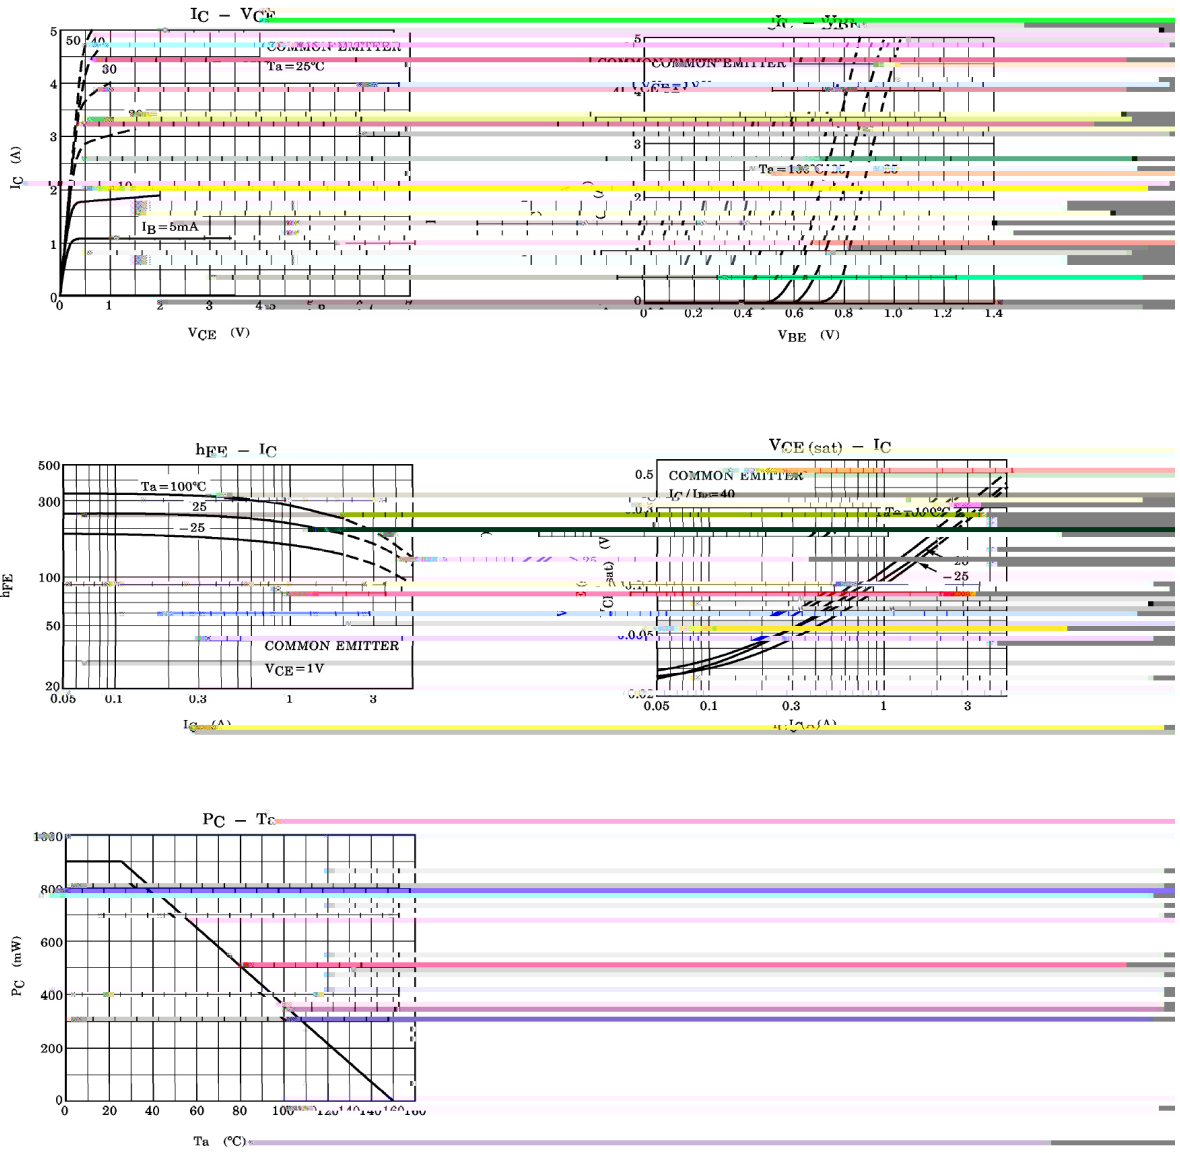


/ Package Dimensions


T0-92LM

Unit: mm

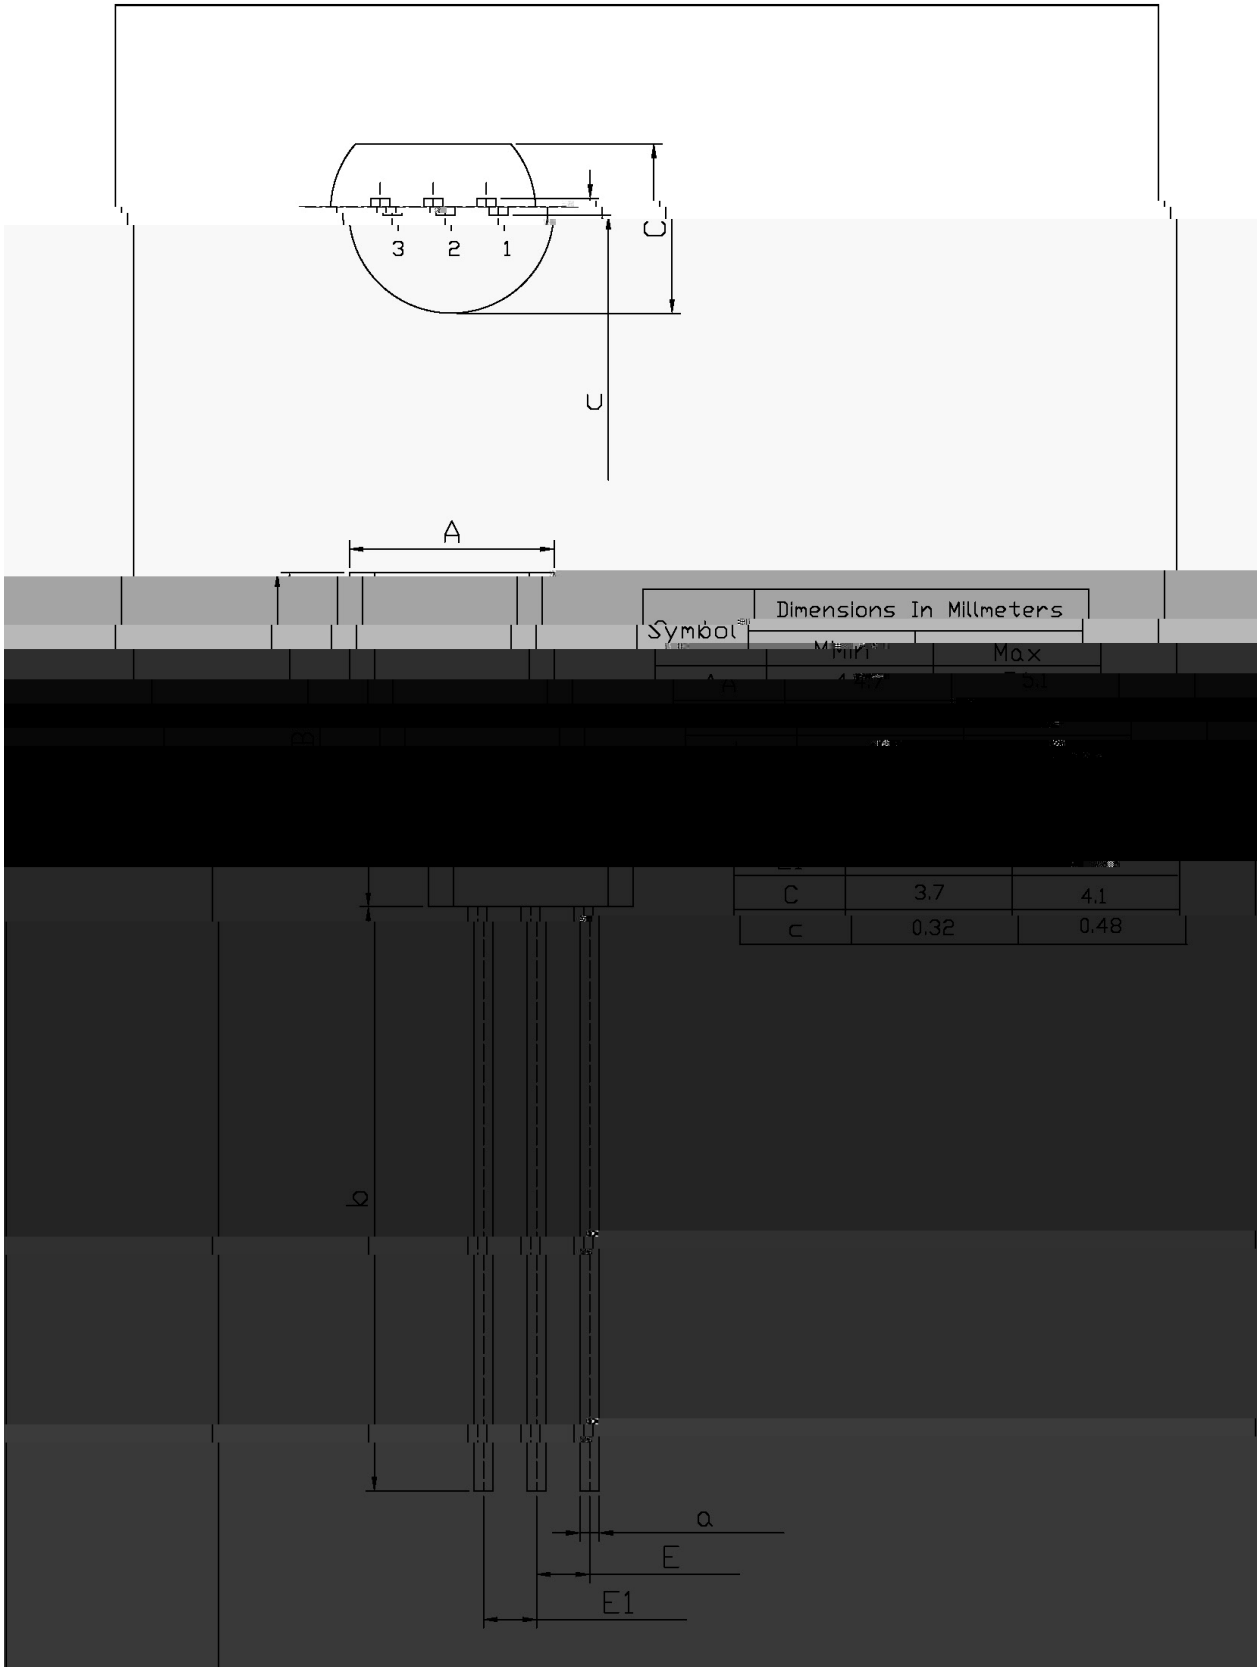

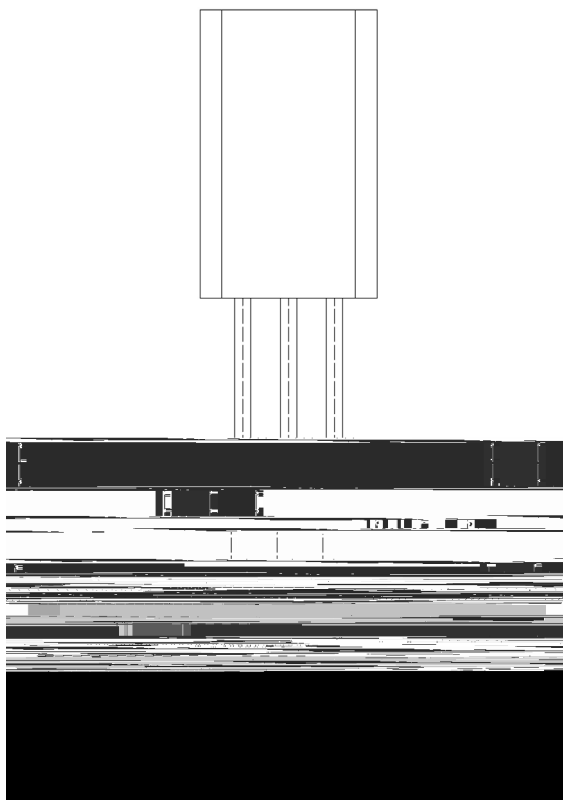

( ) / Temperature Profile for Dip Soldering(Pb-Free)

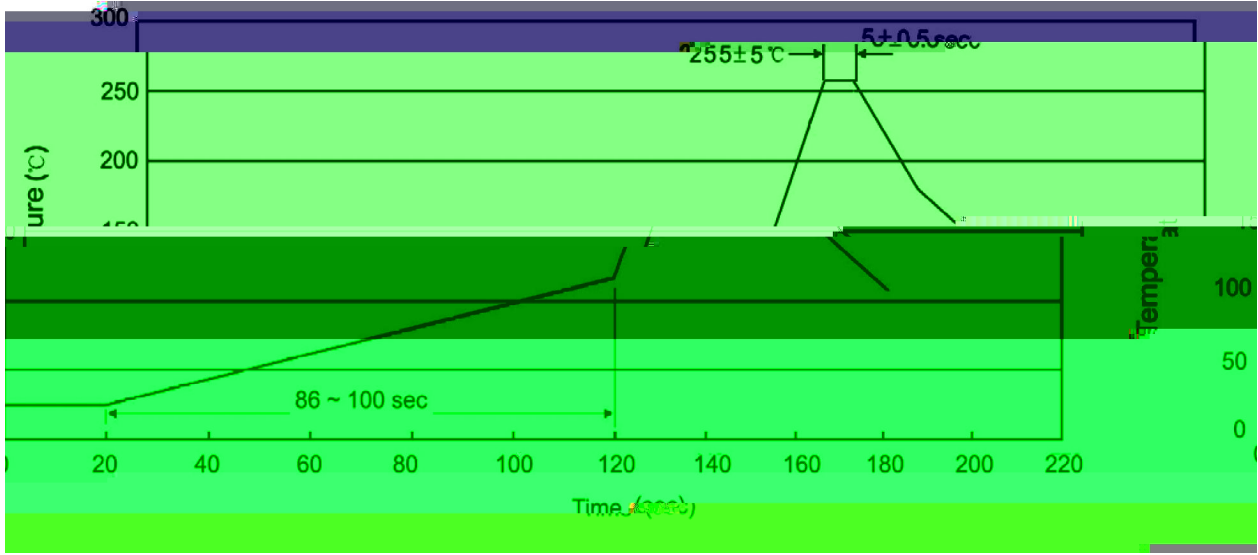

Note:

- |   |       |     |       |          |  |
|---|-------|-----|-------|----------|--|
| 1 | 25    | 150 | 60    | 90sec;   | 1.Preheating:25~150 , Time:60~90sec.     |
| 2 | 255±5 |     | 5±0.5 | sec;     | 2.Peak Temp.:255±5 , Duration:5± 0.5sec. |
| 3 |       |     | 2     | 10 /sec. | 3. Cooling Speed: 2~10 /sec.             |

/ Resistance to Soldering Heat Test Conditions

270±5                      10± 1 sec.                      Temp.:270±5                      Time:10±1 sec

/ Packaging SPEC.

/ BULK