

**2SD965**  
Rev.E Mar.-2016

TO-92          NPN          Silicon NPN transistor in a TO-92 Plastic Package.

Low  $V_{CE(sat)}$

**/ Absolute Maximum Ratings(Ta=25 )**

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	$V_{CBO}$	40	V
Collector to Emitter Voltage	$V_{CEO}$	20	V
Emitter to Base Voltage	$V_{EBO}$	7.0	V
Collector Current - Continuous	$I_C$	5.0	A
Collector Current – Continuous(Pulse)	$I_{CP}$	8.0	A
Collector Power Dissipation	$P_C$	750	mW
Junction Temperature	$T_j$	150	
Storage Temperature Range	$T_{stg}$	-55 150	


**/ Electrical Characteristics(Ta=25 )**

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Emitter Breakdown Voltage	$V_{CEO}$	$I_C=1.0mA$ $I_B=0$	20			V
Emitter to Base Breakdown Voltage	$V_{EBO}$	$I_E=10 A$ $I_C=0$	7.0			V
Collector Cut-Off Current	$I_{CBO}$	$V_{CB}=10V$ $I_E=0$			0.1	A
Emitter Cut-Off Current	$I_{EBO}$	$V_{EB}=7.0V$ $I_C=0$			0.1	A
DC Current Gain	$h_{FE(1)}$	$V_{CE}=2.0V$ $I_C=0.5A$	180		1000	
	$h_{FE(2)}$	$V_{CE}=2.0V$ $I_C=2.0A$	150			
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=3.0A$ $I_B=0.1A$			1.0	V
Transition Frequency	$f_T$	$V_{CE}=6.0V$ $I_C=50mA$		150		MHz
Collector Output Capacitance	$C_{ob}$	$V_{CB}=20V$ $f=1.0MHz$ $I_E=0$			50	pF





/ Marking Instructions

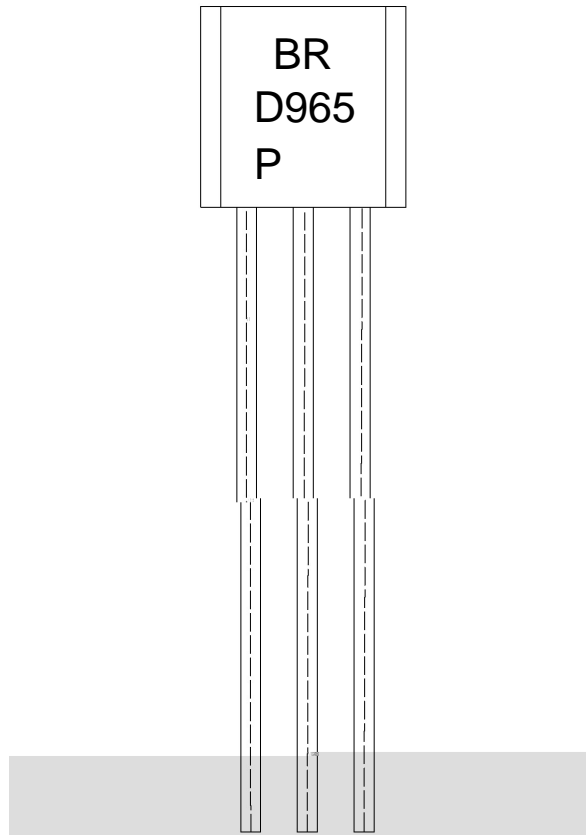

BR:

D965

P:  $h_{FE}$

\*\*\*\*

Note:


BR: Company Code.

D965: Product Type.

P:  $h_{FE}$  Classifications Symbol

\*\*\*\*: Lot No. Code, code change with Lot No.

( ) / Temperature Profile for Dip Soldering(Pb-Free)

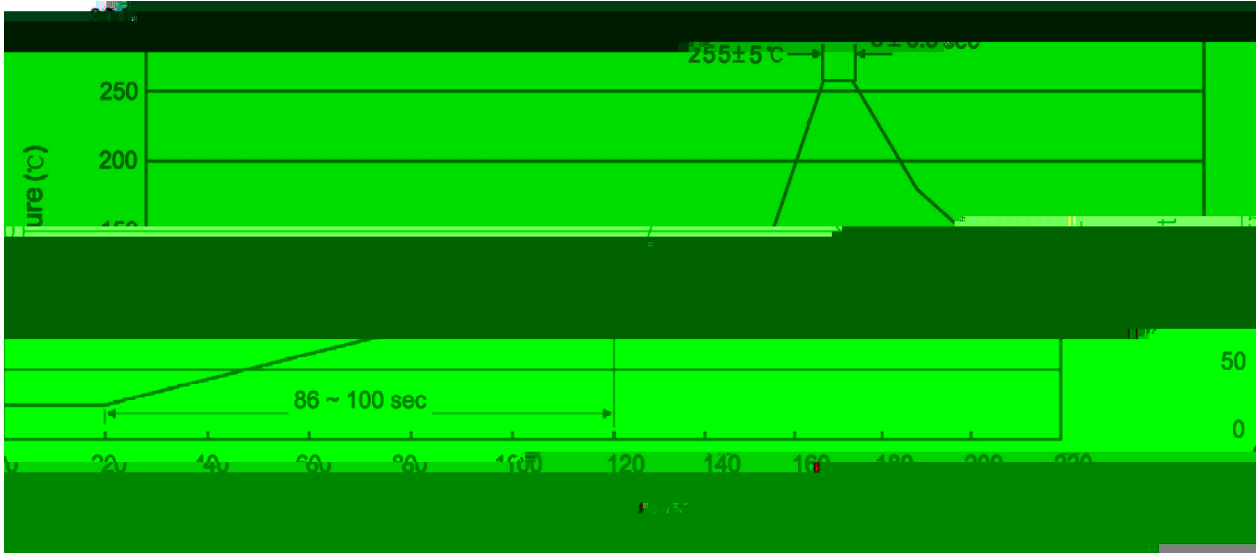

- |   |          |             |  |
|---|----------|-------------|--|
| 1 | 25 ~ 150 | 60 ~ 90sec; | 1. Preheating: 25~150 , Time: 60~90sec.    |
| 2 | 255±5    | 5±0.5sec;   | 2. Peak Temp.: 255±5 , Duration: 5±0.5sec. |
| 3 | 2 ~ 10   | /sec.       | 3. Cooling Speed: 2~10 /sec.               |

/ Resistance to Soldering Heat Test Conditions

270±5                      10±1 sec.                      Temp: 270±5                      Time: 10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units				Dimension (unit mm <sup>3</sup> )		