

/ Descriptions

KF 50) CD GE G` Silicon PNP transistor in a TO-92LM Plastic Package.

/ Features


#

Excellent high current linearity, low saturation voltage.

/ Applications

High frequency low power amplifier applications.

/ Equivalent Circuit



/ Pinning



PIN1 Base PIN 2 Collector PIN 3 Emitter





/ h_{FE} Classifications & Marking

h_{FE}


Parameter

Symbol

/ Electrical Characteristic Curve

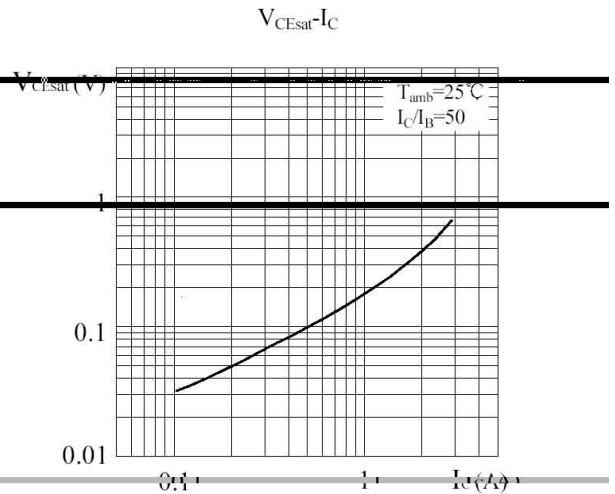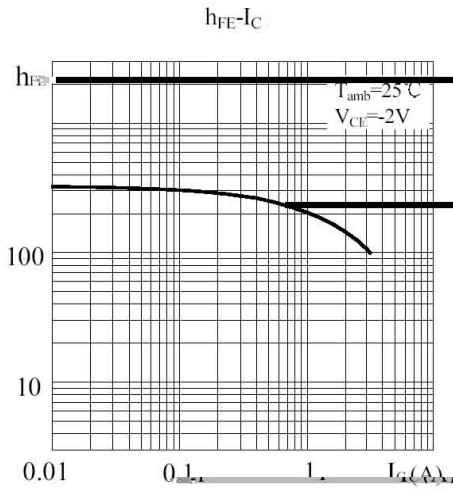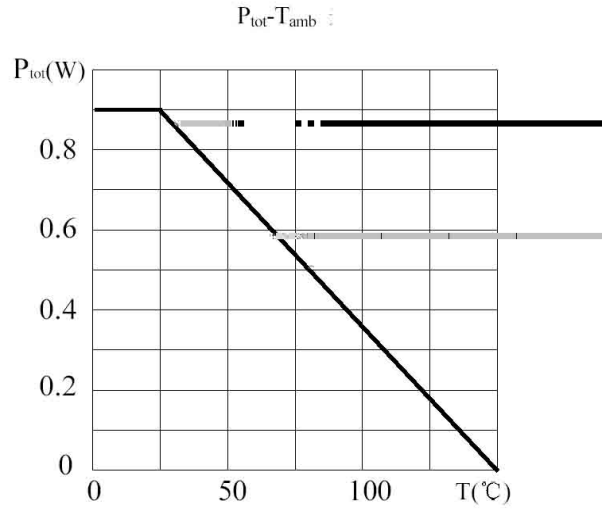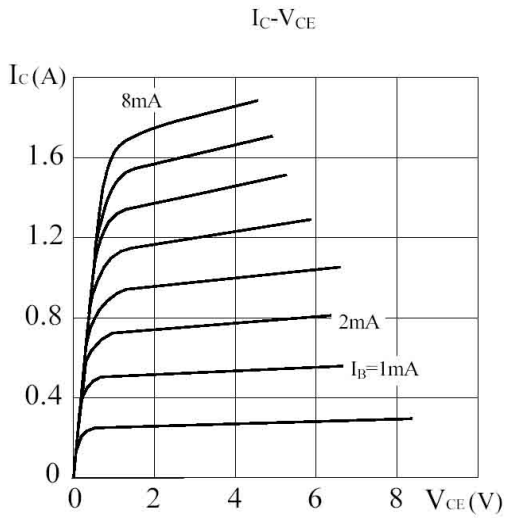

/ Marking Instructions

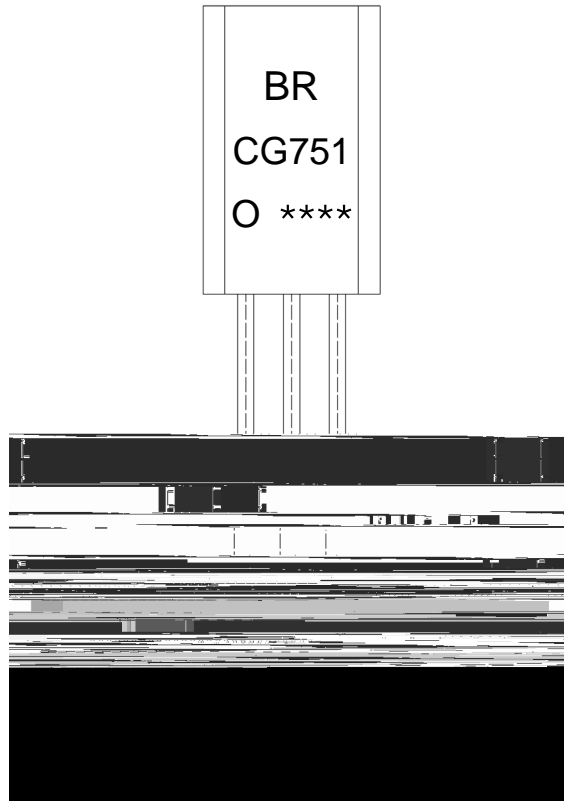

9| 1
: > . , ()
F 1
!!!!

Note:


BR: Company Code.

CG751: Product Type.

O: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

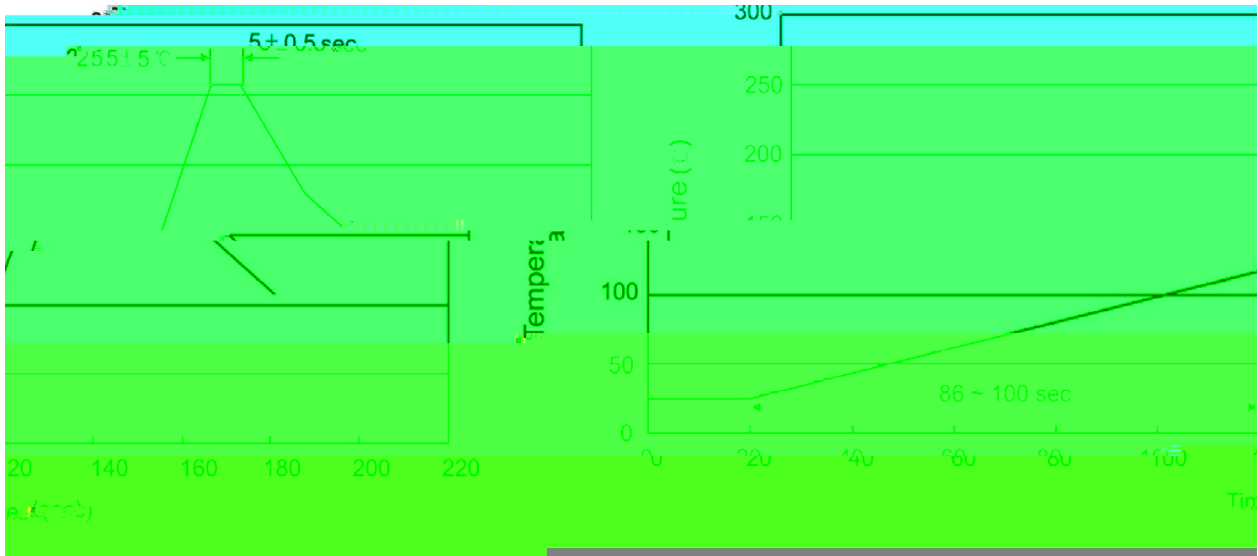

Note:

- | | | | |
|---|----------|-------------|---|
| 1 | 25 ~ 150 | 60 ~ 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255..5 | 5..0.5sec; | 2.Peak Temp.:255..5 , Duration:5..0.5sec. |
| 3 | 2 ~ 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

270..5 10..1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units					Dimension			(unit mm3)
	Units/Bag	Bags/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Bag	Ø)	Ø)	