

78D06







1.5A,

Л² α = / z v =


	θ		
	θ		

		$\leq$				

Electrical Characteristic Curve

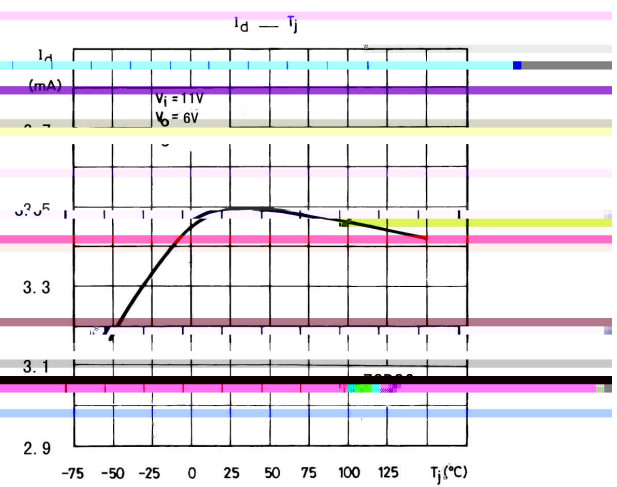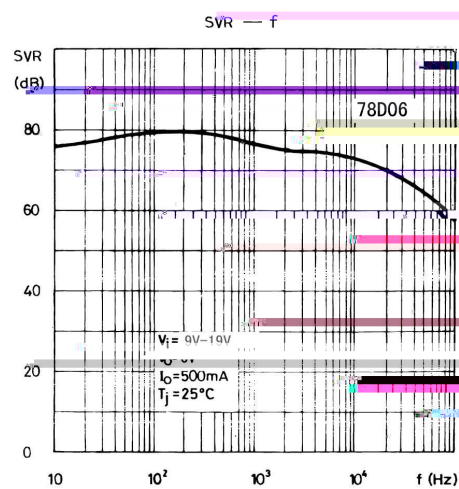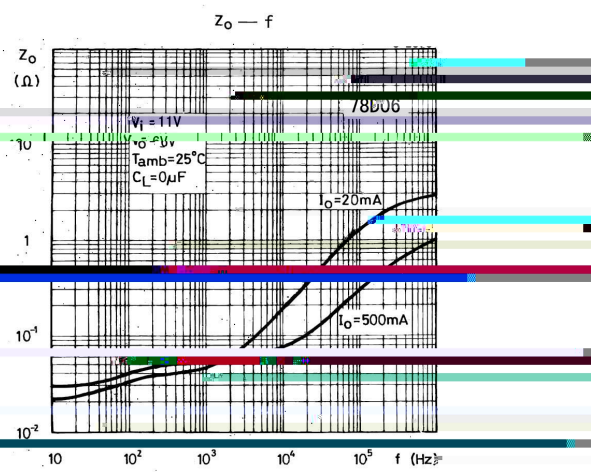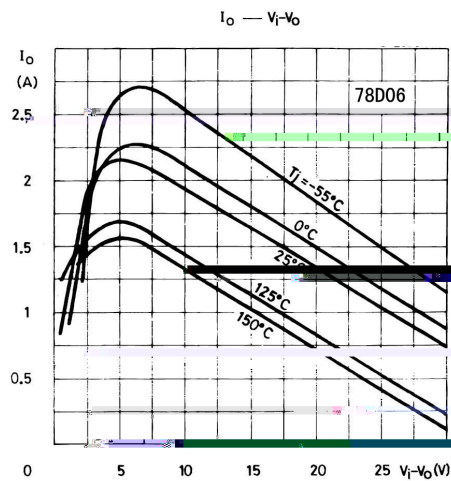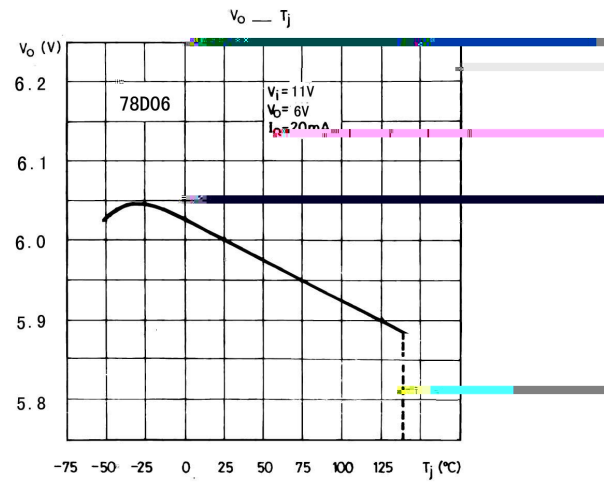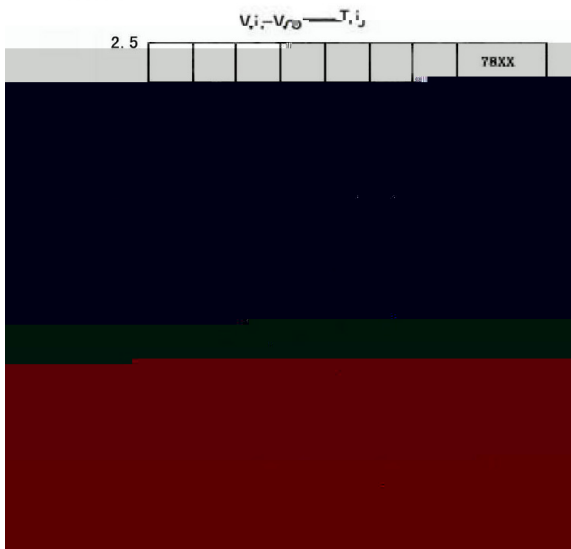

⌘ É Ò Ì f / Package Dimensions

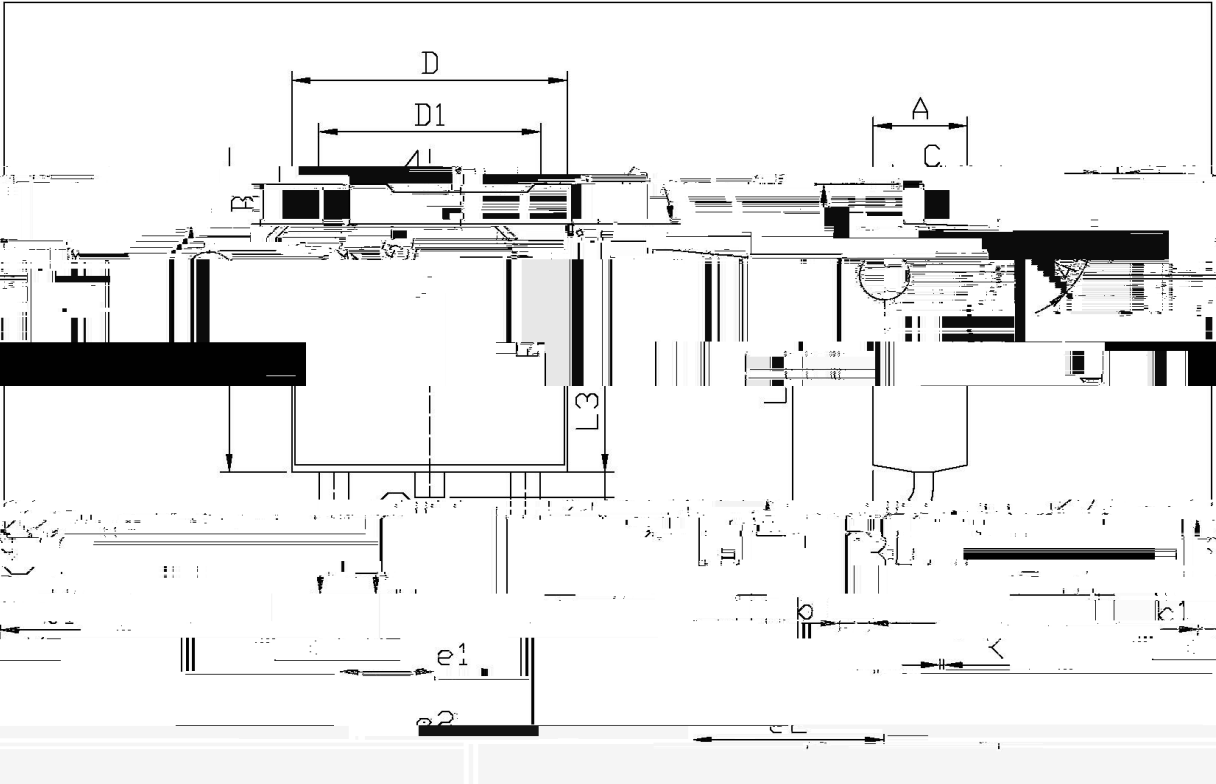

单位：mm


Dimensions in Millimeters		Dimensions in Millimeters	
Min	Max	Min	Max
0.95	1.25	e1	2.24
0.70	0.90	e2	1.73
0.45	0.55	b	0.85
0.45	0.55	k1	1.50
0.45	0.55	K	2.25
0.00	0.10	L3	5.10
0.00	0.10	L3	5.50

J-252

TI

78D06

1. 符号 / Marking Instructions

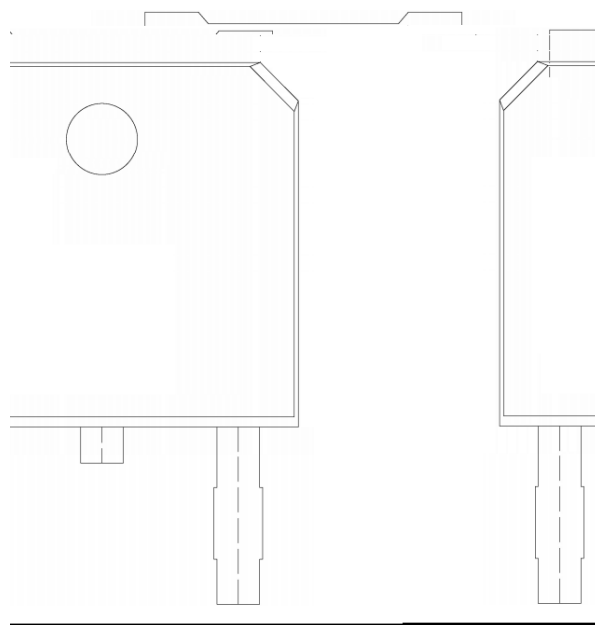

BR

78D06

ᐱ ᓂ ᑭ ᕈ ᖃ ᗰ ᘊ ᔪ ᖅ / Wh p shudwxuh Sur iloh i ru LU Uhior z Vroghulq j+Se0l uhh,

 $\pm$ $\pm$ $\pm$ $\pm$

4. **Y T** / Resistance to Soldering Heat Test Conditions

 $+$ $\pm$

— / Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box