

5 Ø / Descriptions

:5 .> // x 9 † o


/ " / Features

l 9 † k ÿ ß v ä S ' ~ %o y ? £ ò

— ÷ / Applications

9 † o

^ W] Ô• / — Ô• / Equivalent Circuit or Application Circuit

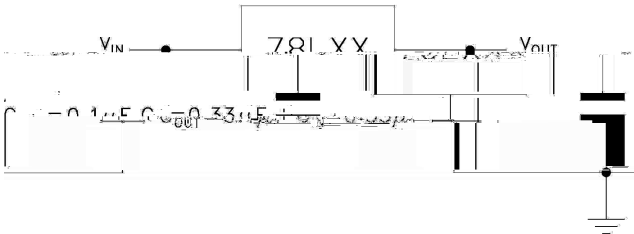

Û- æ / Pinning



y

y

y

, M V / Marking

- ~ " Øo

@	Z		% y

@	Z	y i Ú^	ˆ 4	ˆ "	ˆ Y	% y
		Ù				

78L15

Ô? d ¢

78L15

78L15

G PD t ϕ (x /) / Temperature Profile for Dip Soldering(Pb-Free)

" ϕ y
 o ~ ‰ ‰ - k ‰ -
 o Q r - k 4 Ò r r - r
 o D N ò i Ò Ò , ‰ - -

‘D /Cª p fl »] / Resistance to Soldering Heat Test Conditions

y r - y r

G P Æ / Packaging SPEC.

^ x

7>β E	Units/Bag /;>	Bags/Inner Box >/-	Units/Inner Box /-	Inner Boxes/Outer Box - /1ç	Units/Outer Box /1ç	Bag>	>β p .
-------	------------------	-----------------------	-----------------------	--------------------------------	------------------------	------	--------