
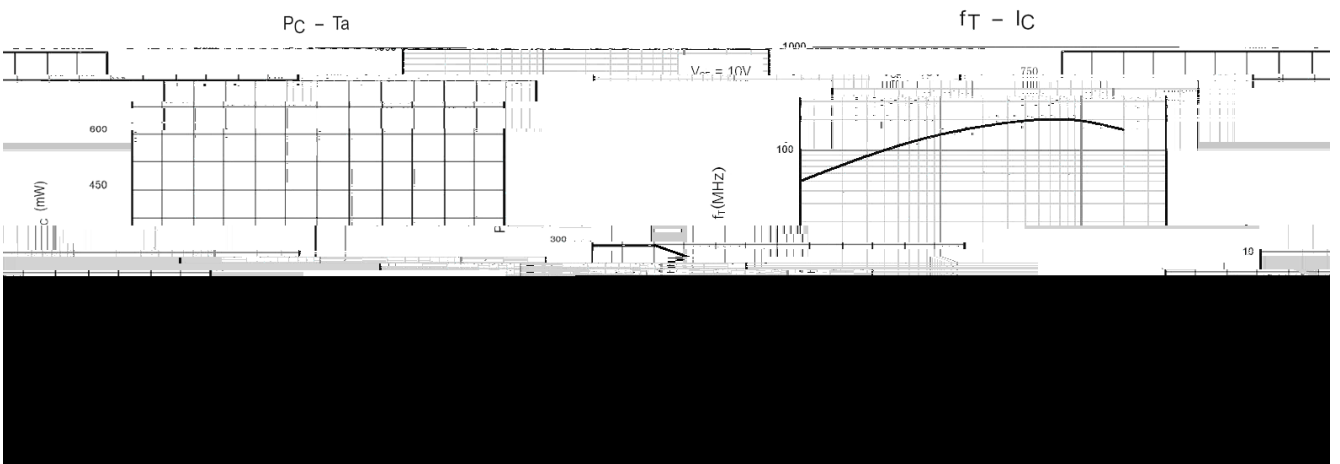
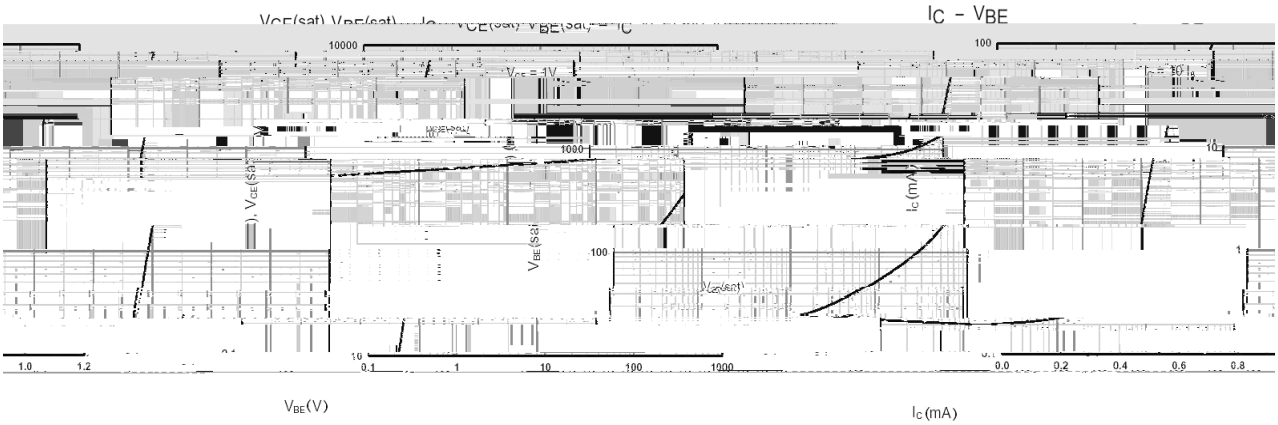



Rev.C Mar.-2023


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-40	V
Collector to Emitter Voltage	V_{CEO}	-25	V
Emitter to Base Voltage	V_{EBO}	-6.0	V
Collector Current	I_C	-1.5	A
Base Current	I_B	-0.5	A

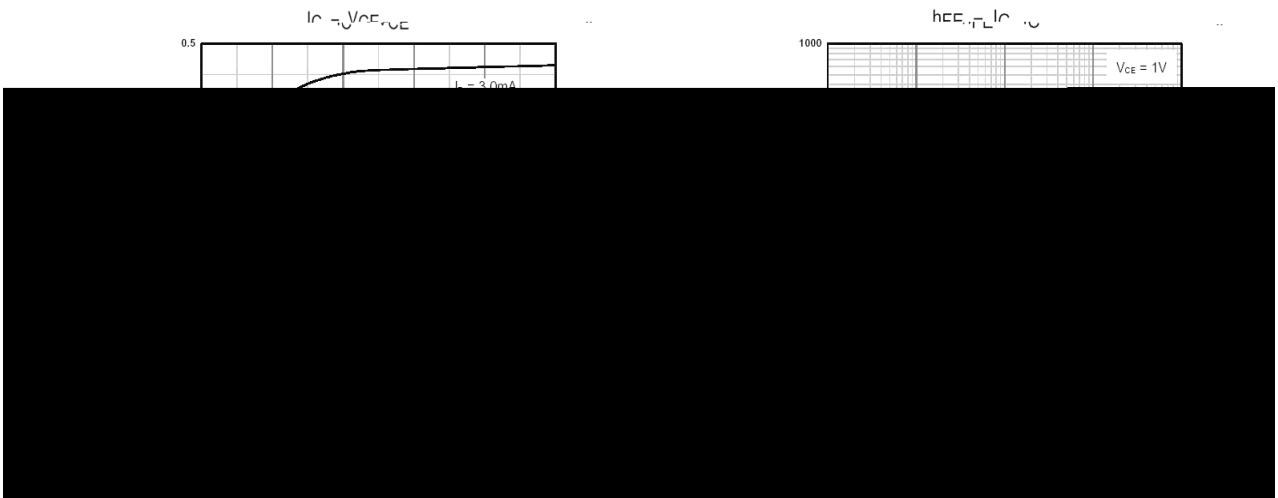

SMT-23

单位: mm

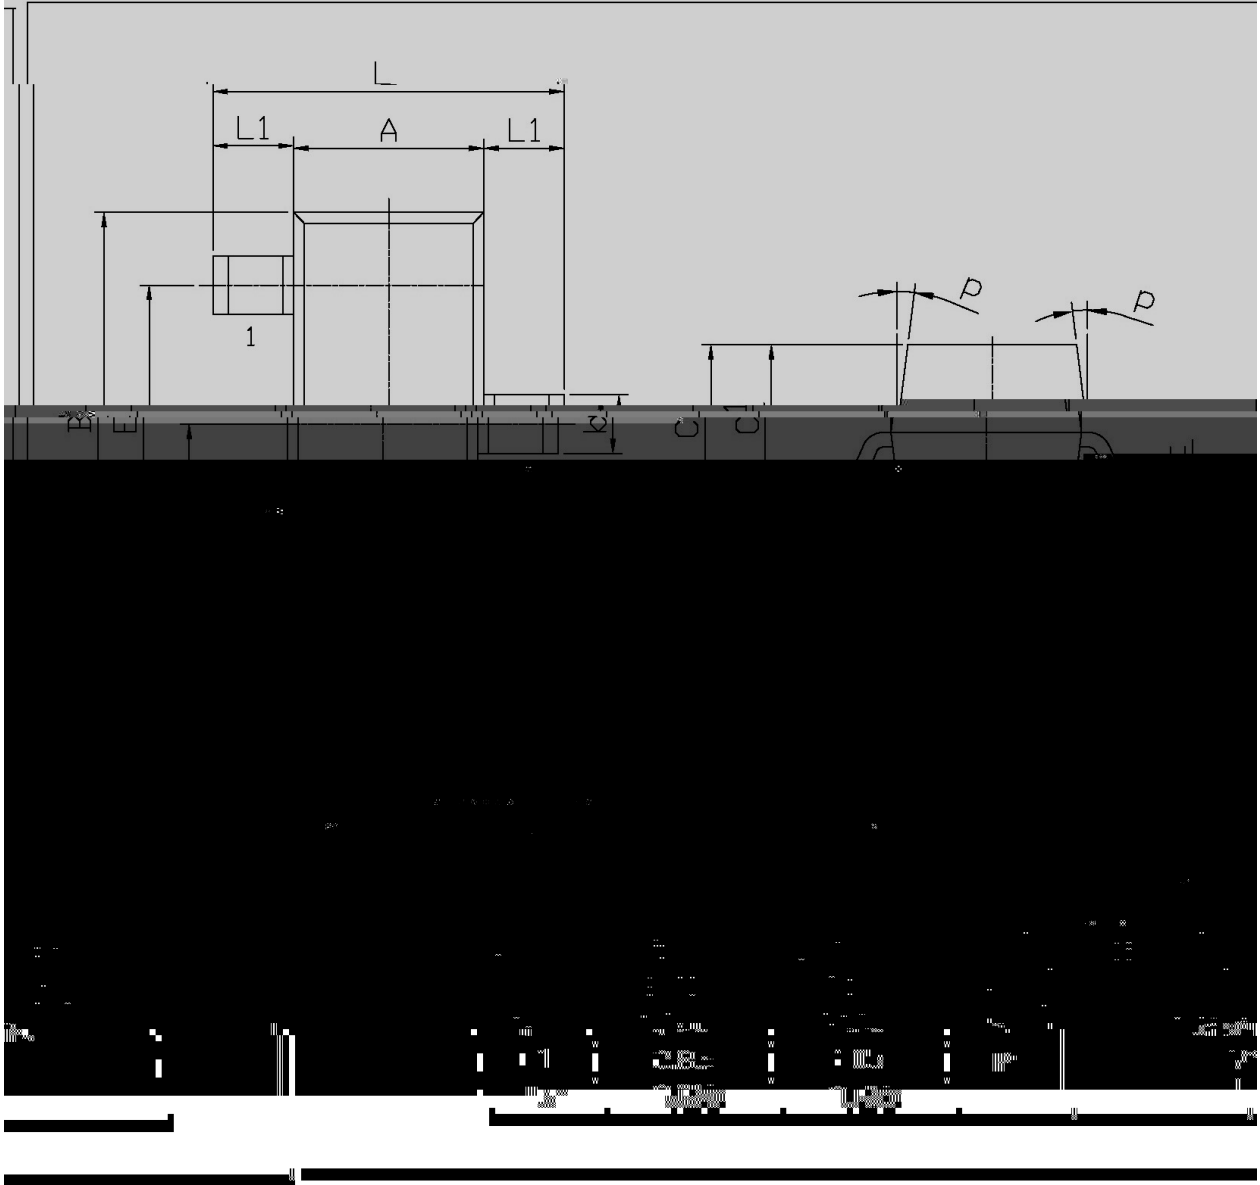

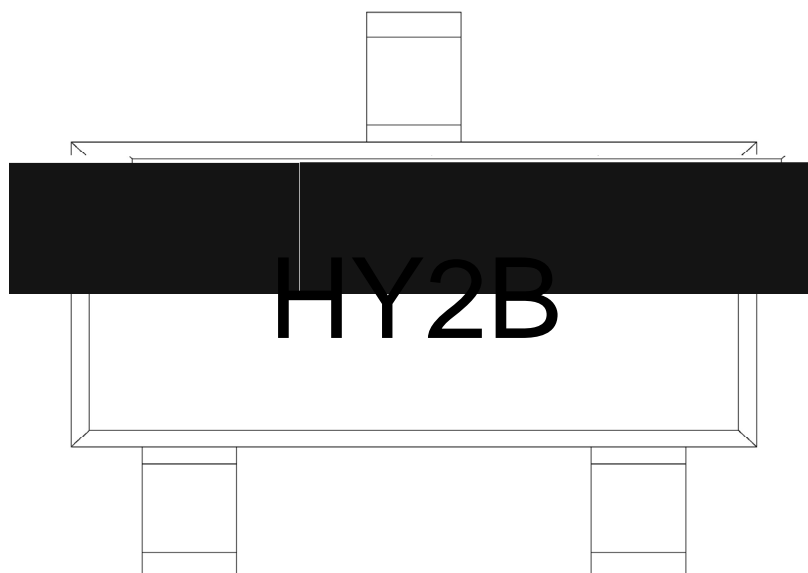

H

Y2

B h_{FE}

Note:

H Company Code

Y2 Product Type Code

B h_{FE} Classifications Symbol Code

Temperature Profile for IR Reflow Soldering (Pb-Free)

Note:

60 ~ 90sec;
 5 ± 0.5sec;
 /sec.

1. Preheating: 150~180 °C, Time: 60~90sec.
2. Peak Temp.: 245 ± 5 °C, Duration: 5 ± 0.5sec.
3. Cooling Speed: 2~10 °C/sec.