


Silicon Diode in a SOT-23 Plastic Package.

Small signal diode,HF Product.


Parameter	Symbol	Rating	Unit
Repetitive Reverse Voltage	V_{RRM}	250	V
Reverse Voltage	V_R	200	V
Working Peak Reverse Voltage	V_{RWM}		
RMS Reverse Voltage	$V_{R(RMS)}$	141	V
Average Rectified Forward Current	I_{FM}	400	mA
Non-repetitive Peak Forward Surge Current	$I_{FSM(1)}$ (pulse width=1.0 μ S)	9.0	A
	$I_{FSM(2)}$ (pulse width=100 μ S)	3.0	A
	$I_{FSM(3)}$ (pulse width=10ms)	1.7	A
Repetitive Peak Forward Surge Current	I_{FRM}	625	mA
Power Dissipation	P_D	350	mW
Thermal Resistance, Junction to Ambient	R	357	/W
Junction and Storage Temperature Range	T_j, T_{stg}	-65 150	

Parameter	Symbol	Test Conditions	gaRiL
-----------	--------	-----------------	-------

/ Electrical Characteristic Curve

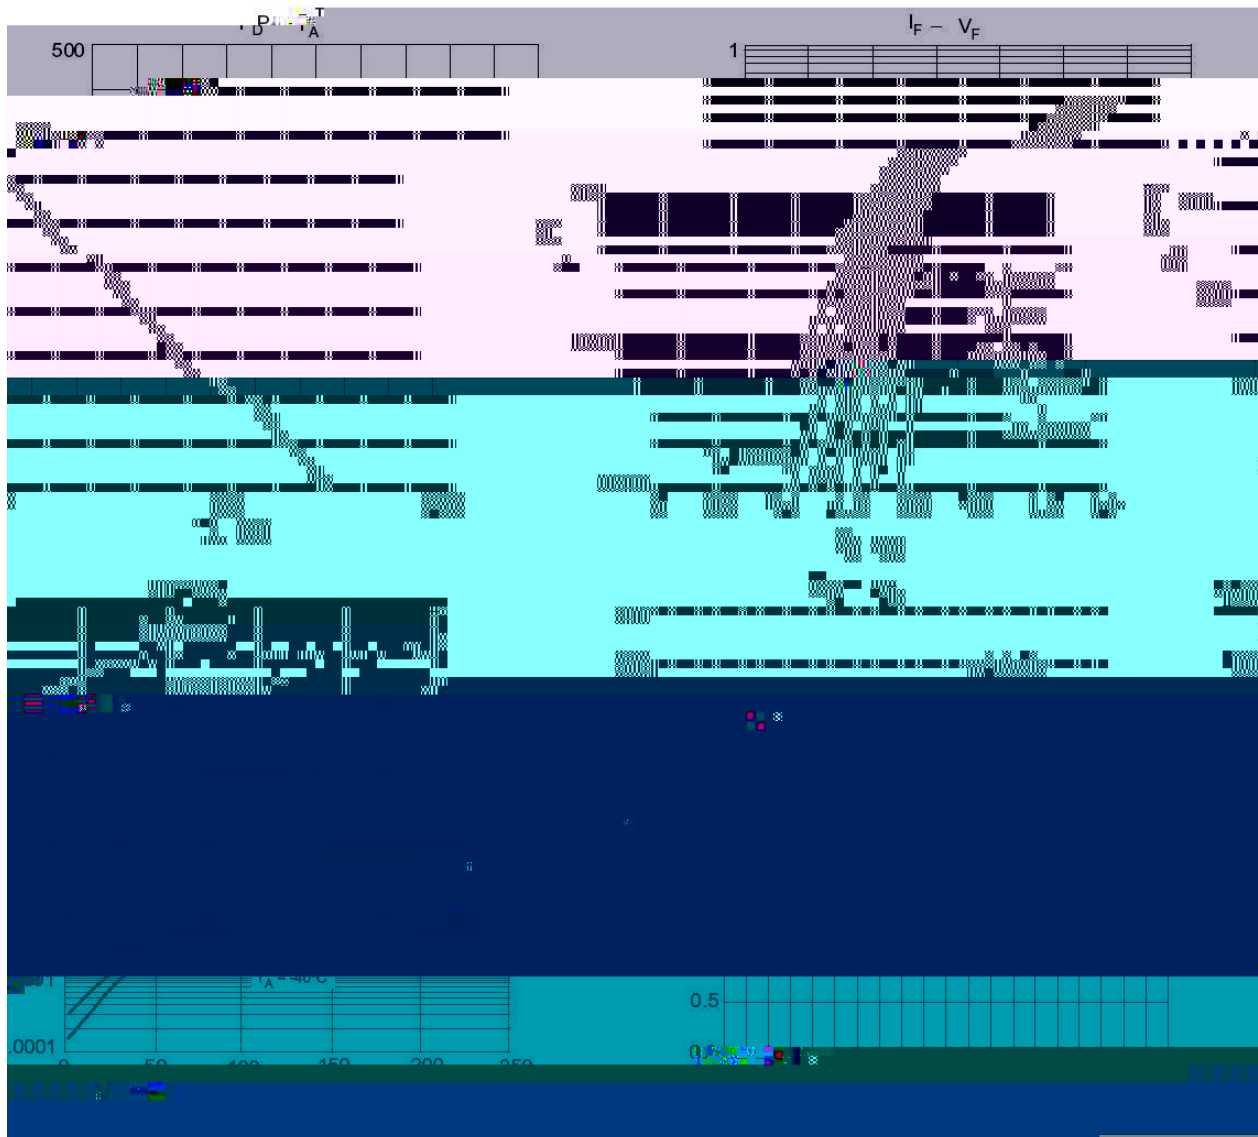

/ Package Dimensions

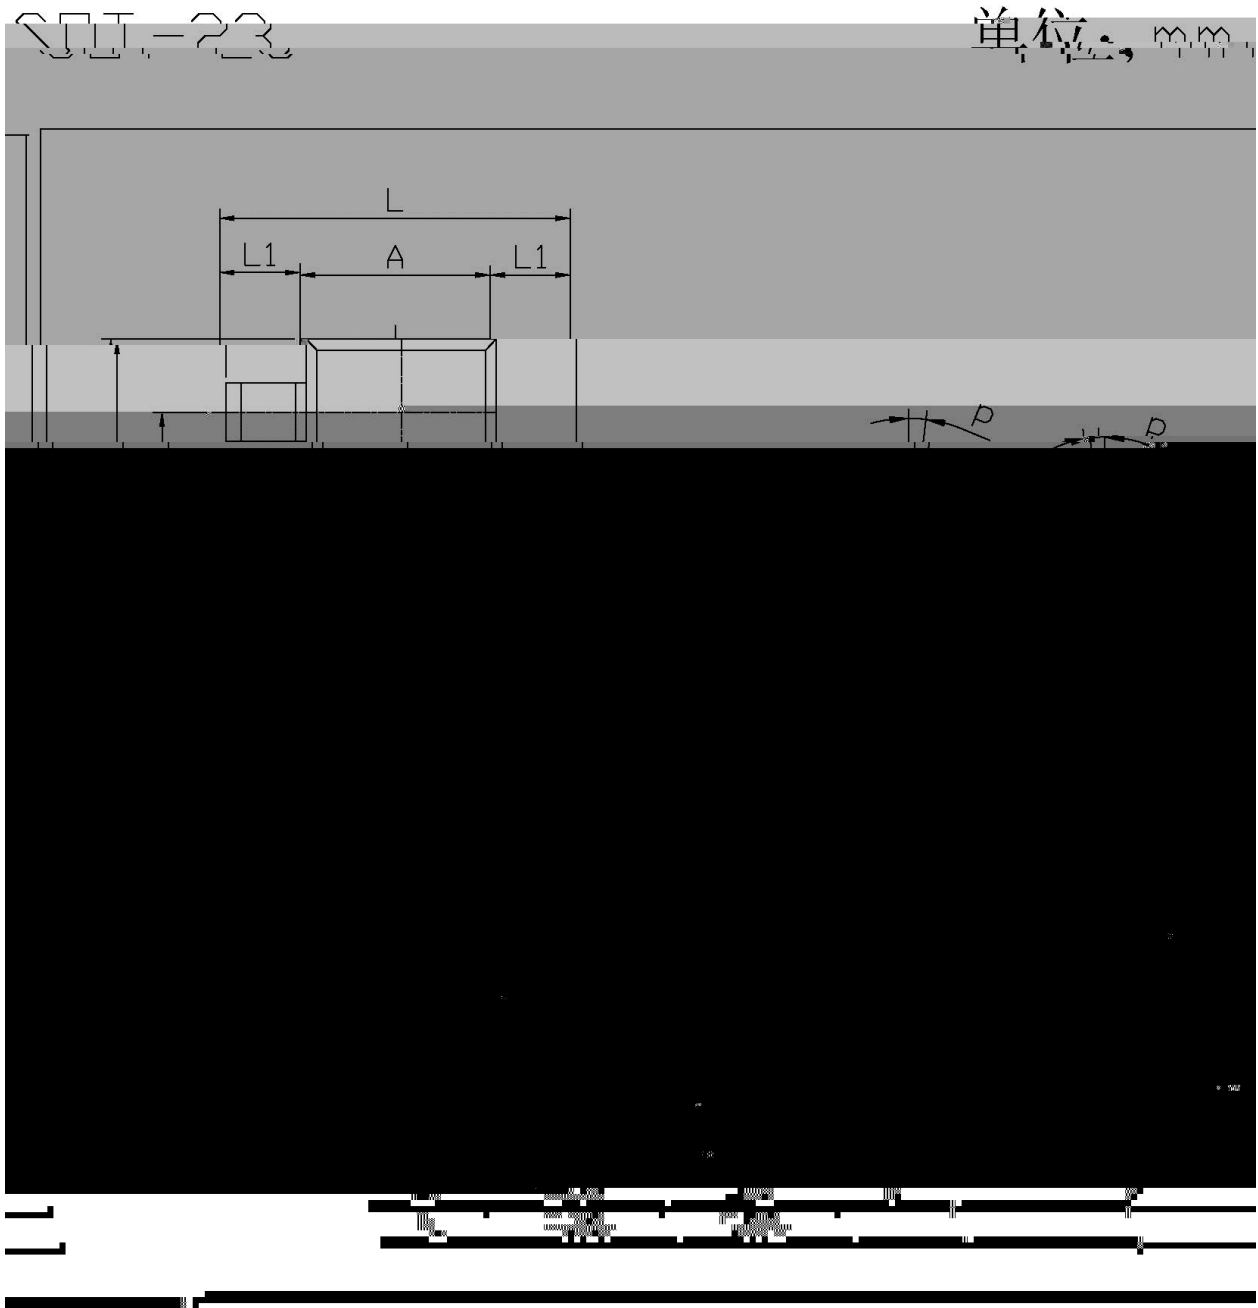

() /

- 1

150 180

60 90sec;
- 2

245 5

5 0.5sec;
- 3

2 10 /sec.
- Note:

1.Preheating:150~180 , Time:60~90sec.

2.Peak Temp.:245 5 , Duration:5 0.5sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260 5 10 1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units	Dimension	(unit mm ³)
--------------	-------	-----------	-------------------------