



Rev. C Oct.-2018

Silicon PNP transistor in a TO-220 Plastic Package.

For 45-50W audio frequency amplifier output stage, Complementary to BR2SD718AR.

Designed for use in audio frequency amplifier.





PIN1 Base PIN 2 Collector PIN 3 Emitter


h_{FE} Classifications	O	Y
Symbol		
h_{FE} Range	60 120	100 200

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-120	V
Collector to Emitter Voltage	V_{CEO}	-120	V
Emitter to Base Voltage	V_{EBO}	-5.0	V

Rev. C Oct.-2018

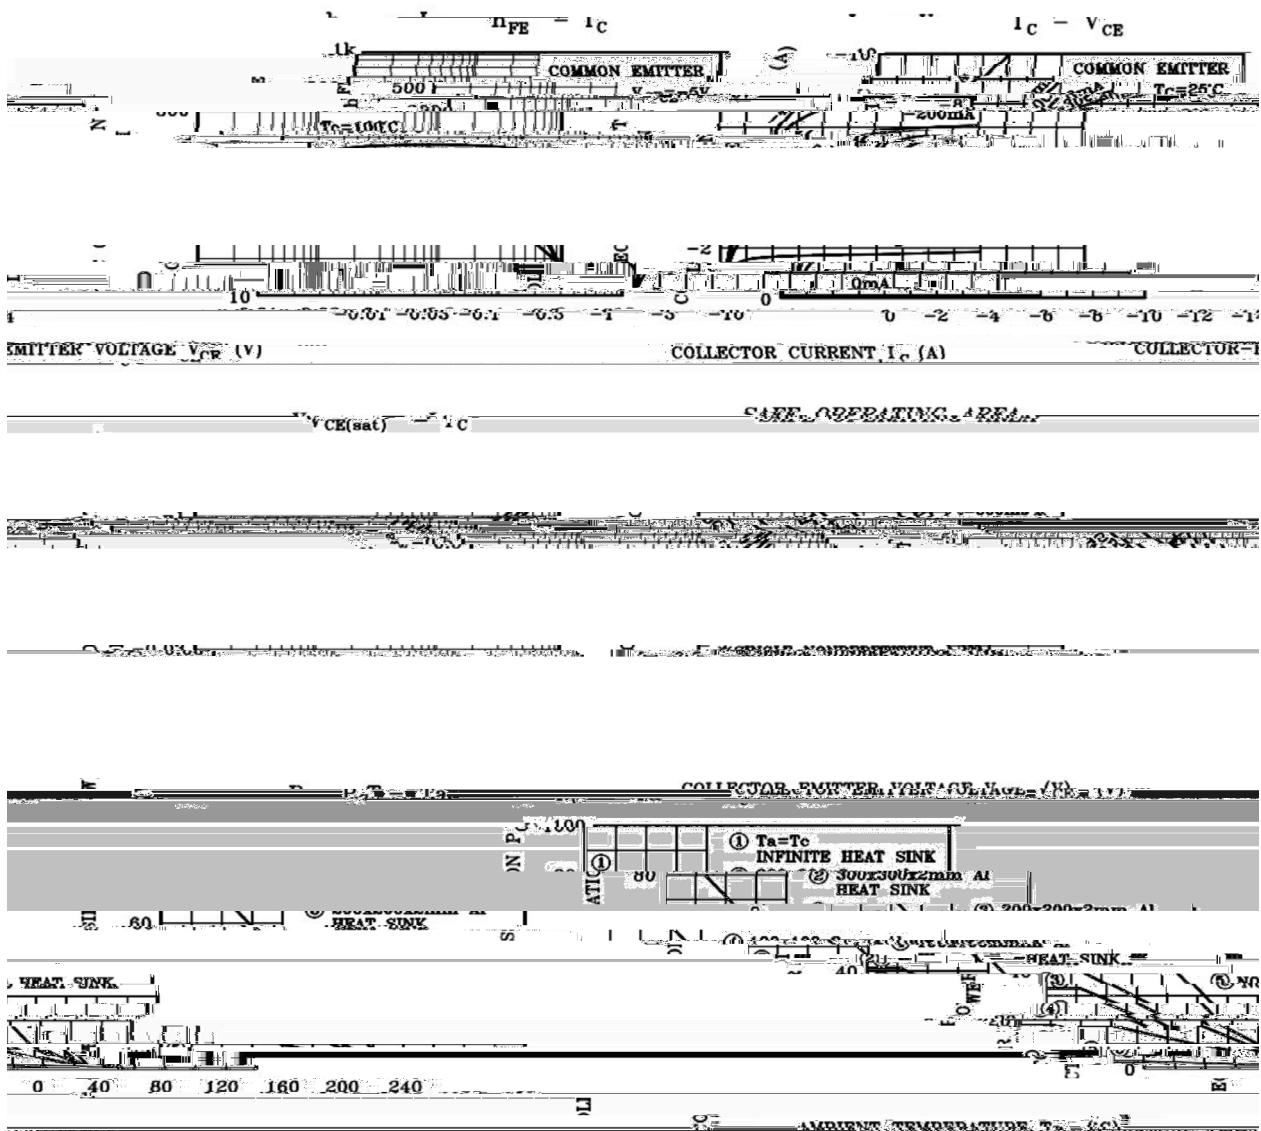

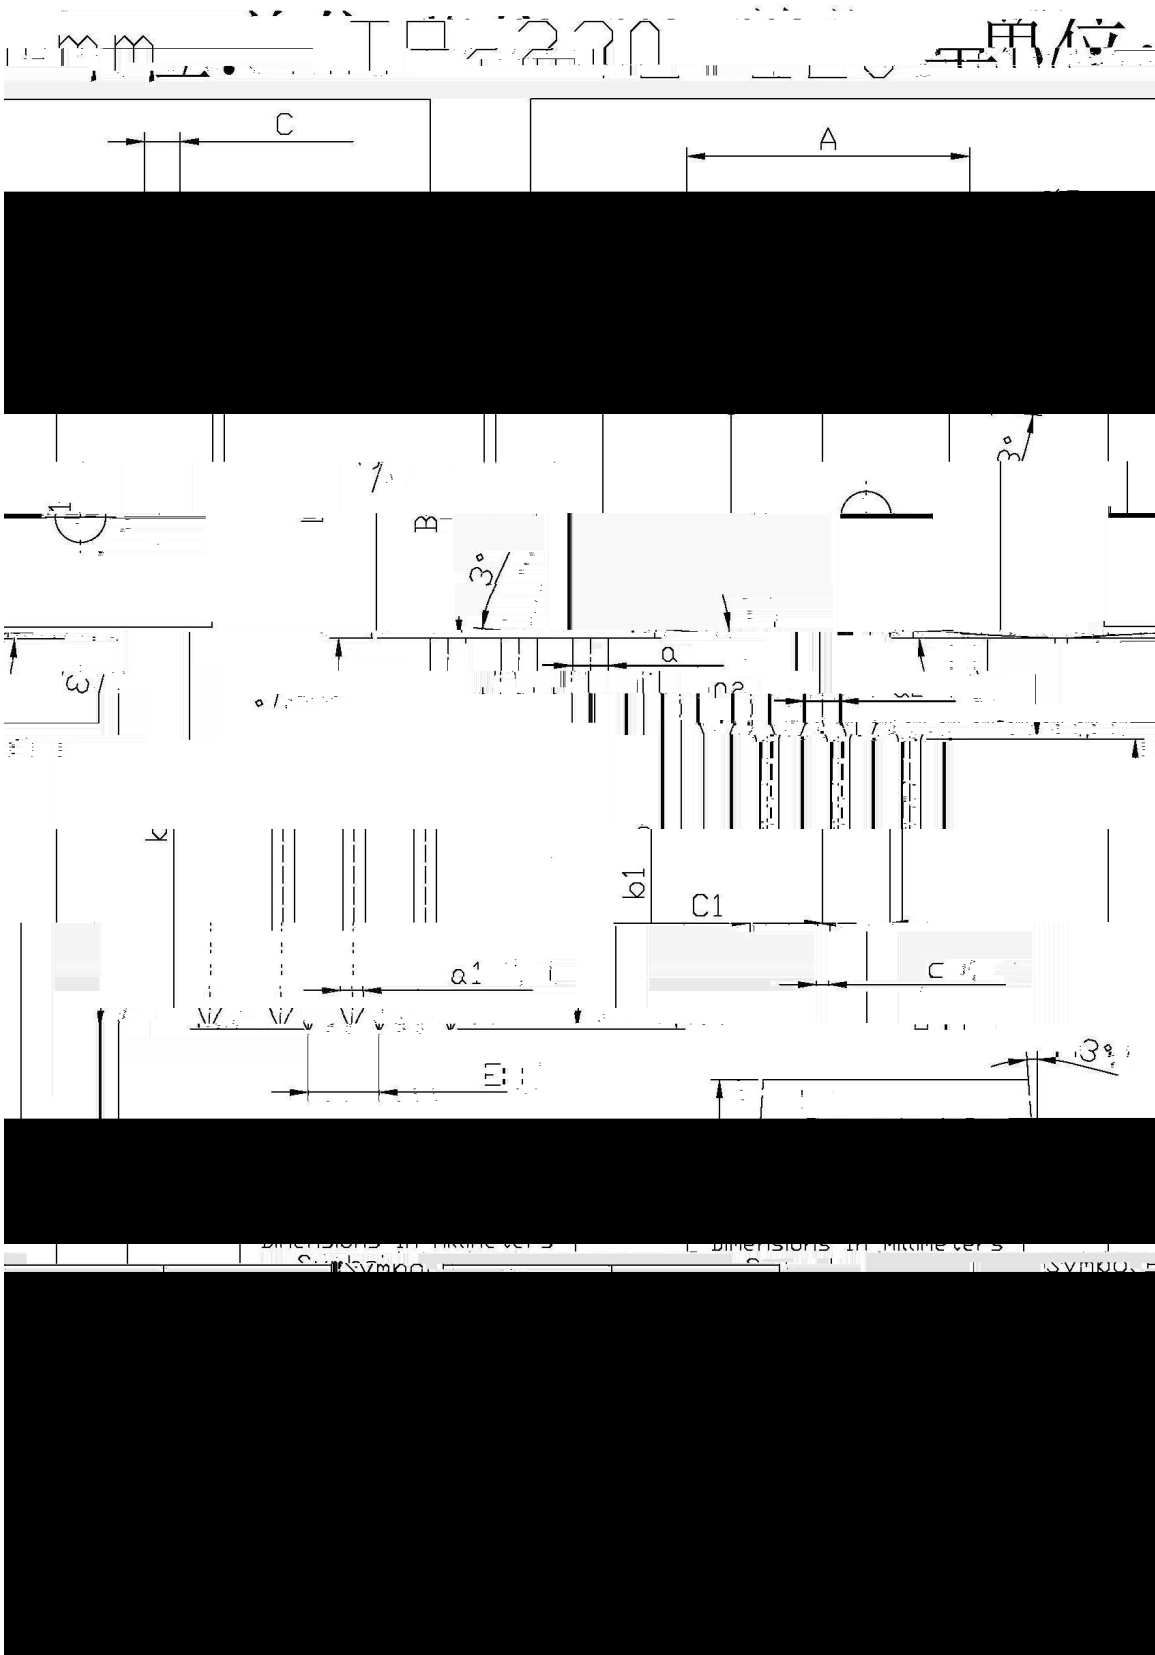

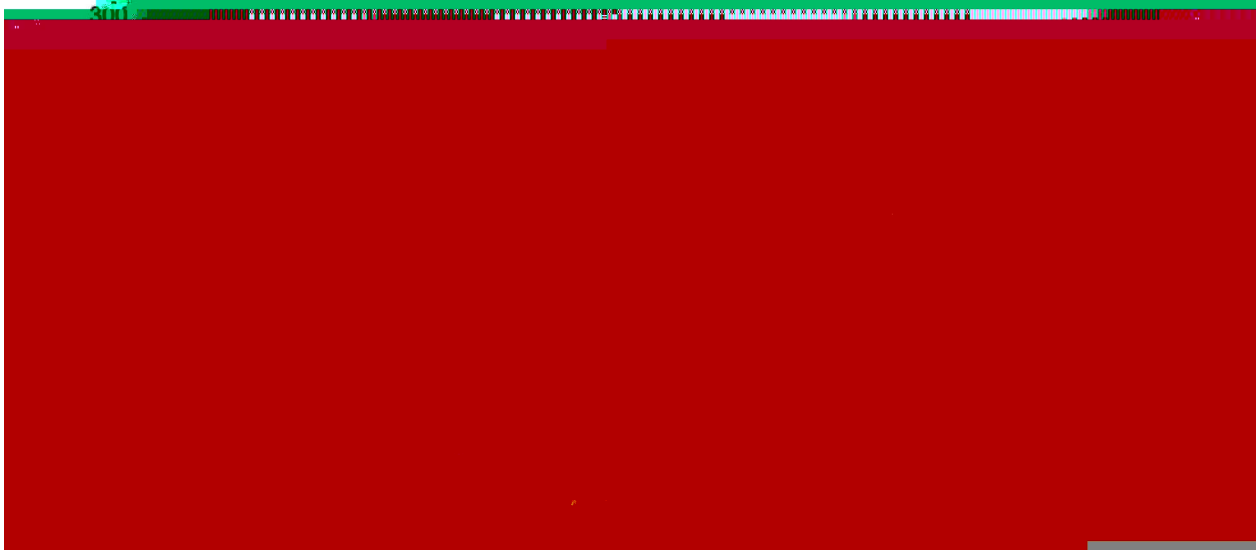

Note:

1 25 150 60 90sec;
2 255

1.Preheating:25~150 , Time:60~90sec.

1