


/ Descriptions

/ Features


418D/

/ Applications

/ / Equivalent Circuit or Application Circuit

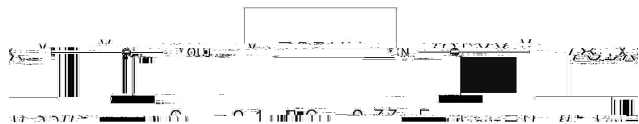

/ Pinning






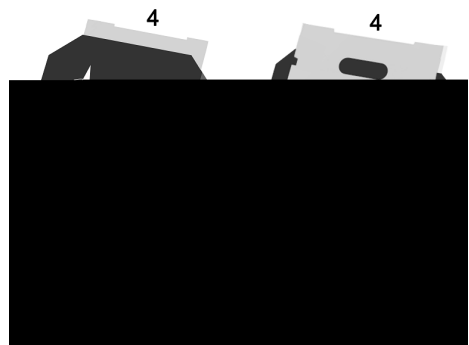



/ Marking

			Ñ
			Ñ
			Ñ
			Ñ

		Ñ				
	M	Ñ				
		Ñ				
	M	Ñ				
		Ñ				

/ Electrical Characteristic Curve

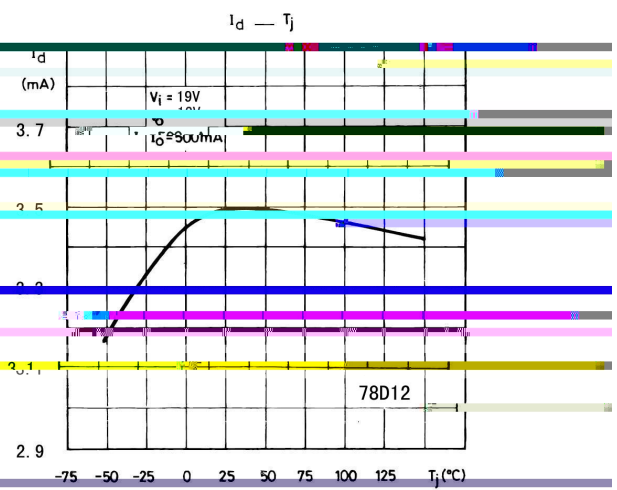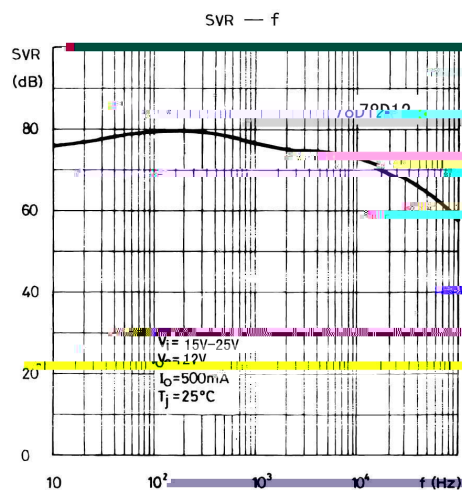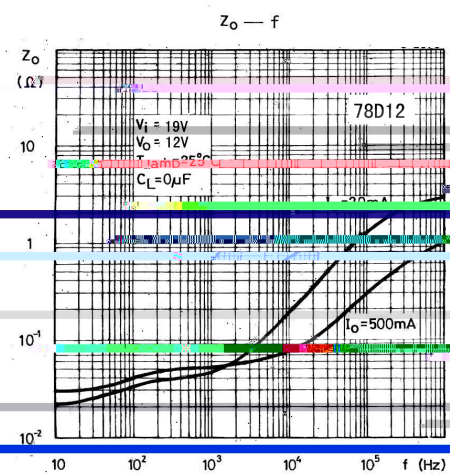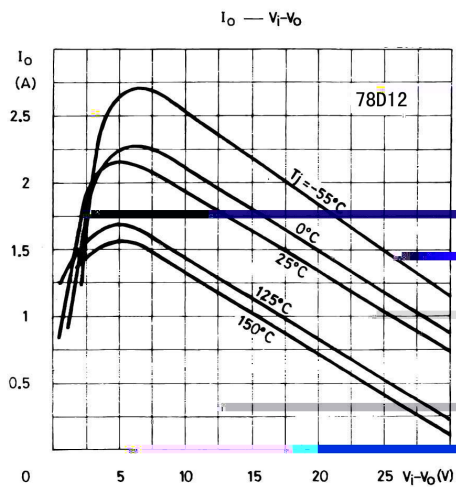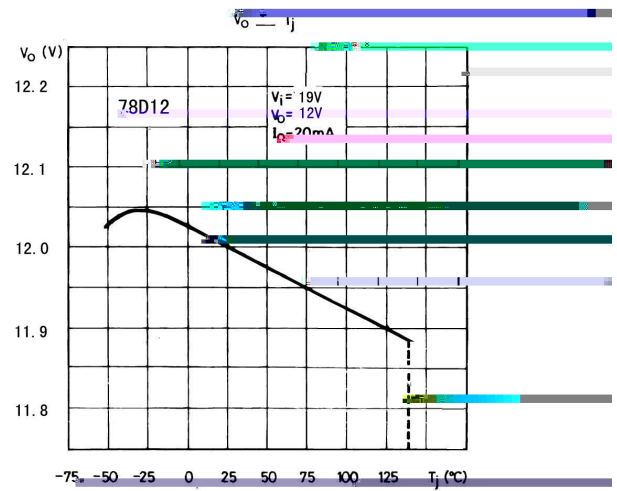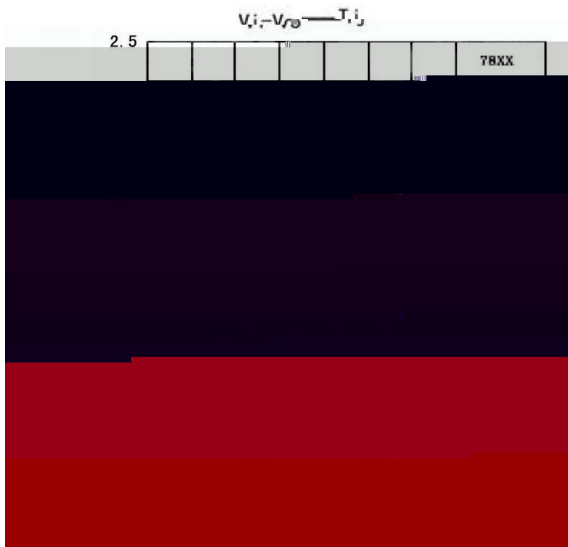

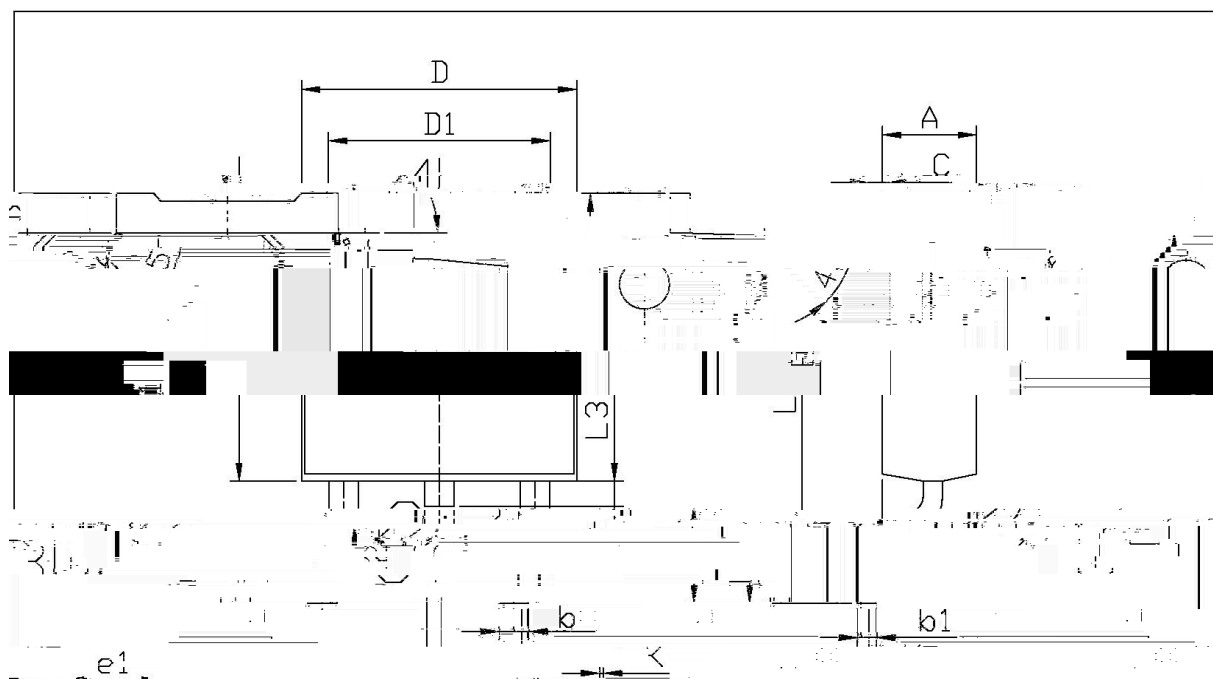


单位: mm

72
 Dimensions
 Min
 Max
 0.08
 0.10
 0.12
 0.14
 0.16
 0.18
 0.20
 0.22
 0.24
 0.26
 0.28
 0.30
 0.32
 0.34
 0.36
 0.38
 0.40
 0.42
 0.44
 0.46
 0.48
 0.50
 0.52
 0.54
 0.56
 0.58
 0.60
 0.62
 0.64
 0.66
 0.68
 0.70
 0.72
 0.74
 0.76
 0.78
 0.80
 0.82
 0.84
 0.86
 0.88
 0.90
 0.92
 0.94
 0.96
 0.98
 1.00
 1.02
 1.04
 1.06
 1.08
 1.10
 1.12
 1.14
 1.16
 1.18
 1.20
 1.22
 1.24
 1.26
 1.28
 1.30
 1.32
 1.34
 1.36
 1.38
 1.40
 1.42
 1.44
 1.46
 1.48
 1.50
 1.52
 1.54
 1.56
 1.58
 1.60
 1.62
 1.64
 1.66
 1.68
 1.70
 1.72
 1.74
 1.76
 1.78
 1.80
 1.82
 1.84
 1.86
 1.88
 1.90
 1.92
 1.94
 1.96
 1.98
 2.00
 2.02
 2.04
 2.06
 2.08
 2.10
 2.12
 2.14
 2.16
 2.18
 2.20
 2.22
 2.24
 2.26
 2.28
 2.30
 2.32
 2.34
 2.36
 2.38
 2.40
 2.42
 2.44
 2.46
 2.48
 2.50
 2.52
 2.54
 2.56
 2.58
 2.60
 2.62
 2.64
 2.66
 2.68
 2.70
 2.72
 2.74
 2.76
 2.78
 2.80
 2.82
 2.84
 2.86
 2.88
 2.90
 2.92
 2.94
 2.96
 2.98
 3.00
 3.02
 3.04
 3.06
 3.08
 3.10
 3.12
 3.14
 3.16
 3.18
 3.20
 3.22
 3.24
 3.26
 3.28
 3.30
 3.32
 3.34
 3.36
 3.38
 3.40
 3.42
 3.44
 3.46
 3.48
 3.50
 3.52
 3.54
 3.56
 3.58
 3.60
 3.62
 3.64
 3.66
 3.68
 3.70
 3.72
 3.74
 3.76
 3.78
 3.80
 3.82
 3.84
 3.86
 3.88
 3.90
 3.92
 3.94
 3.96
 3.98
 4.00
 4.02
 4.04
 4.06
 4.08
 4.10
 4.12
 4.14
 4.16
 4.18
 4.20
 4.22
 4.24
 4.26
 4.28
 4.30
 4.32
 4.34
 4.36
 4.38
 4.40
 4.42
 4.44
 4.46
 4.48
 4.50
 4.52
 4.54
 4.56
 4.58
 4.60
 4.62
 4.64
 4.66
 4.68
 4.70
 4.72
 4.74
 4.76
 4.78
 4.80
 4.82
 4.84
 4.86
 4.88
 4.90
 4.92
 4.94
 4.96
 4.98
 5.00
 5.02
 5.04
 5.06
 5.08
 5.10
 5.12
 5.14
 5.16
 5.18
 5.20
 5.22
 5.24
 5.26
 5.28
 5.30
 5.32
 5.34
 5.36
 5.38
 5.40
 5.42
 5.44
 5.46
 5.48
 5.50
 5.52
 5.54
 5.56
 5.58
 5.60
 5.62
 5.64
 5.66
 5.68
 5.70
 5.72
 5.74
 5.76
 5.78
 5.80
 5.82
 5.84
 5.86
 5.88
 5.90
 5.92
 5.94
 5.96
 5.98
 6.00
 6.02
 6.04
 6.06
 6.08
 6.10
 6.12
 6.14
 6.16
 6.18
 6.20
 6.22
 6.24
 6.26
 6.28
 6.30
 6.32
 6.34
 6.36
 6.38
 6.40
 6.42
 6.44
 6.46
 6.48
 6.50
 6.52
 6.54
 6.56
 6.58
 6.60
 6.62
 6.64
 6.66
 6.68
 6.70
 6.72
 6.74
 6.76
 6.78
 6.80
 6.82
 6.84
 6.86
 6.88
 6.90
 6.92
 6.94
 6.96
 6.98
 7.00
 7.02
 7.04
 7.06
 7.08
 7.10
 7.12
 7.14
 7.16
 7.18
 7.20
 7.22
 7.24
 7.26
 7.28
 7.30
 7.32
 7.34
 7.36
 7.38
 7.40
 7.42
 7.44
 7.46
 7.48
 7.50
 7.52
 7.54
 7.56
 7.58
 7.60
 7.62
 7.64
 7.66
 7.68
 7.70
 7.72
 7.74
 7.76
 7.78
 7.80
 7.82
 7.84
 7.86
 7.88
 7.90
 7.92
 7.94
 7.96
 7.98
 8.00
 8.02
 8.04
 8.06
 8.08
 8.10
 8.12
 8.14
 8.16
 8.18
 8.20
 8.22
 8.24
 8.26
 8.28
 8.30
 8.32
 8.34
 8.36
 8.38
 8.40
 8.42
 8.44
 8.46
 8.48
 8.50
 8.52
 8.54
 8.56
 8.58
 8.60
 8.62
 8.64
 8.66
 8.68
 8.70
 8.72
 8.74
 8.76
 8.78
 8.80
 8.82
 8.84
 8.86
 8.88
 8.90
 8.92
 8.94
 8.96
 8.98
 9.00
 9.02
 9.04
 9.06
 9.08
 9.10
 9

T0-252

/ Marking Instructions

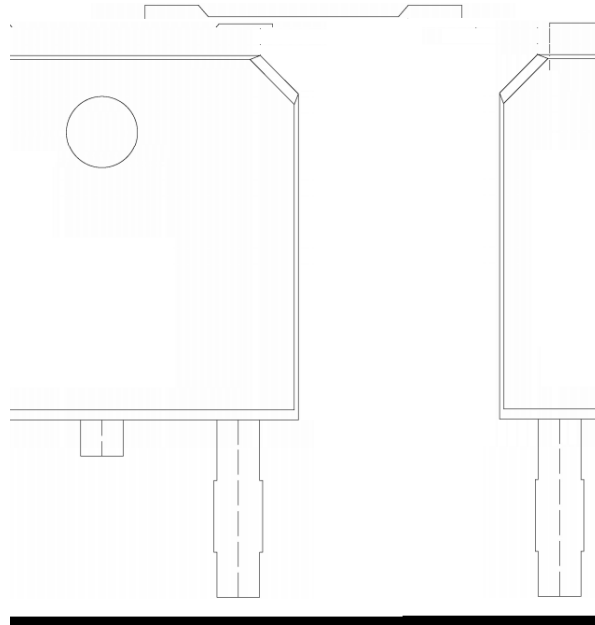

EU

: ;G45

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

$\pm$

$\pm$

$\pm$

$\pm$