



BRB7N60
Rev.D May.-2016

Parameter	Symbol	Rating	Unit
-----------	--------	--------	------

/ Electrical Characteristic Curve

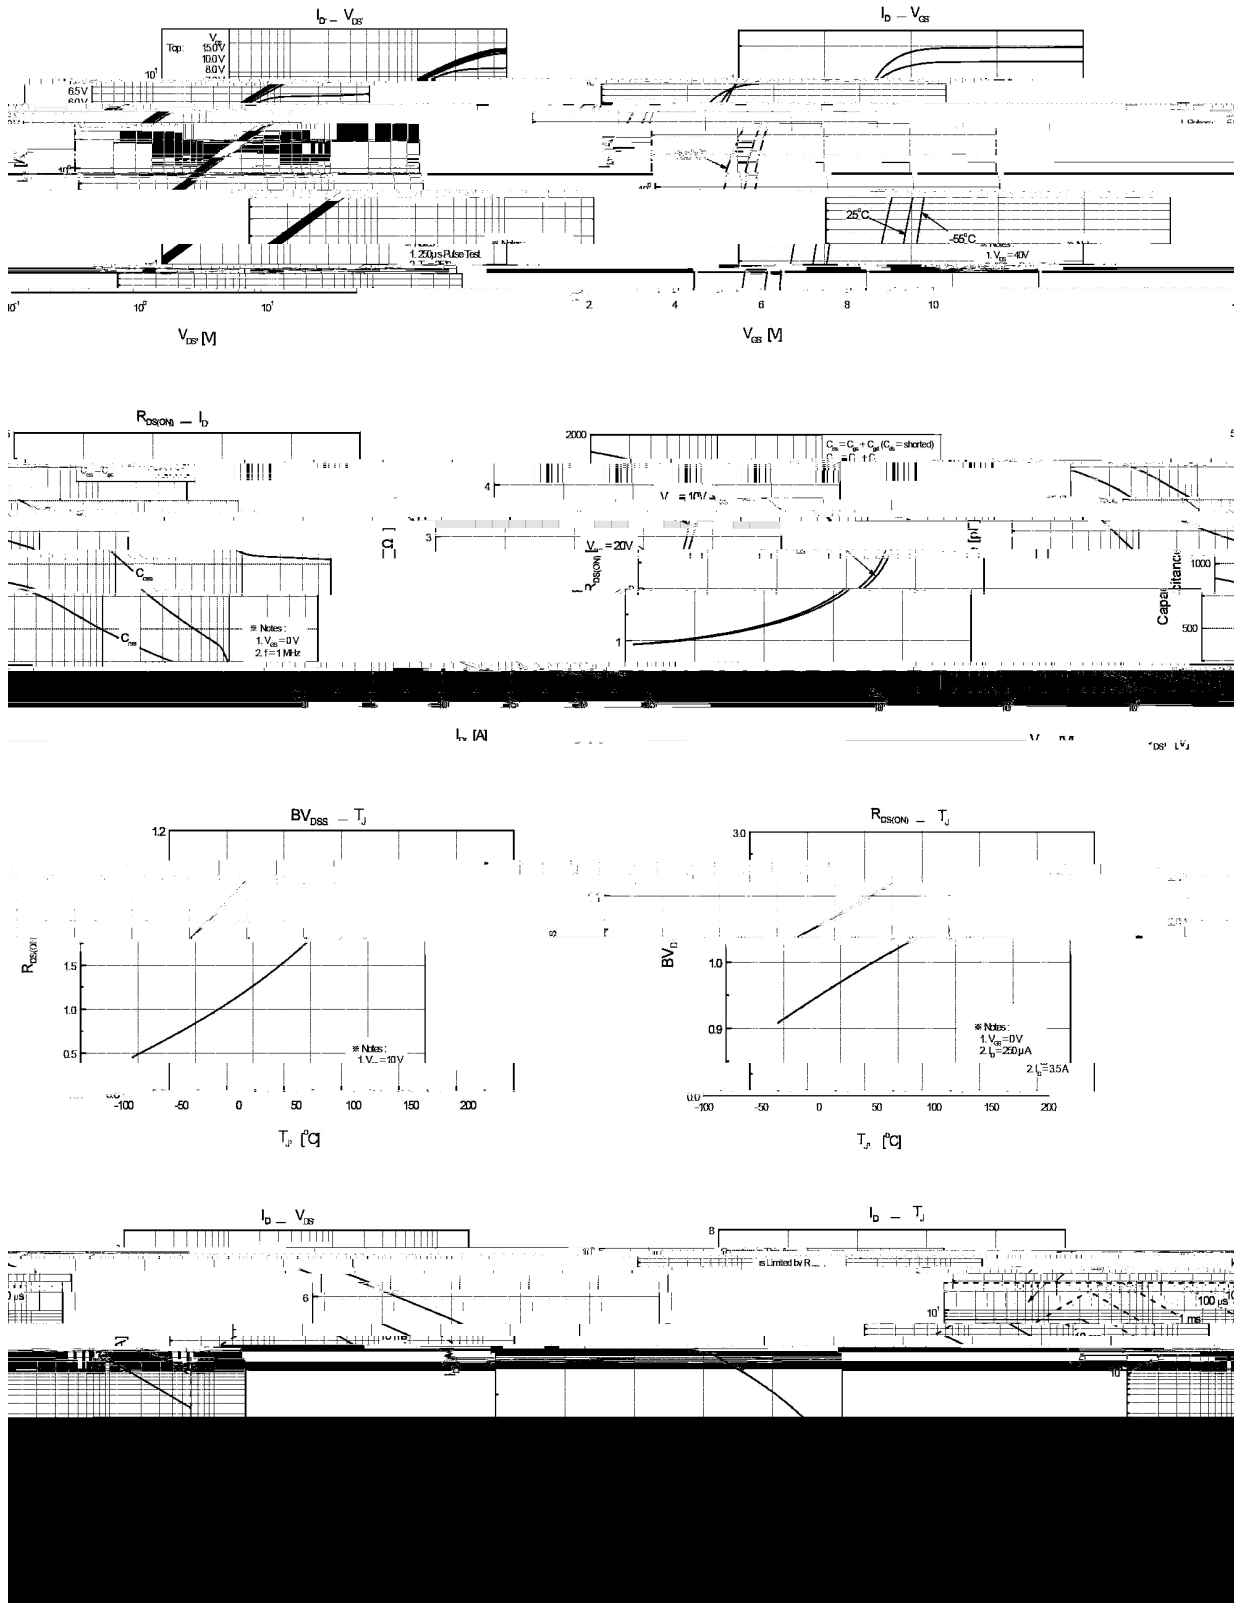


/ Package Dimensions

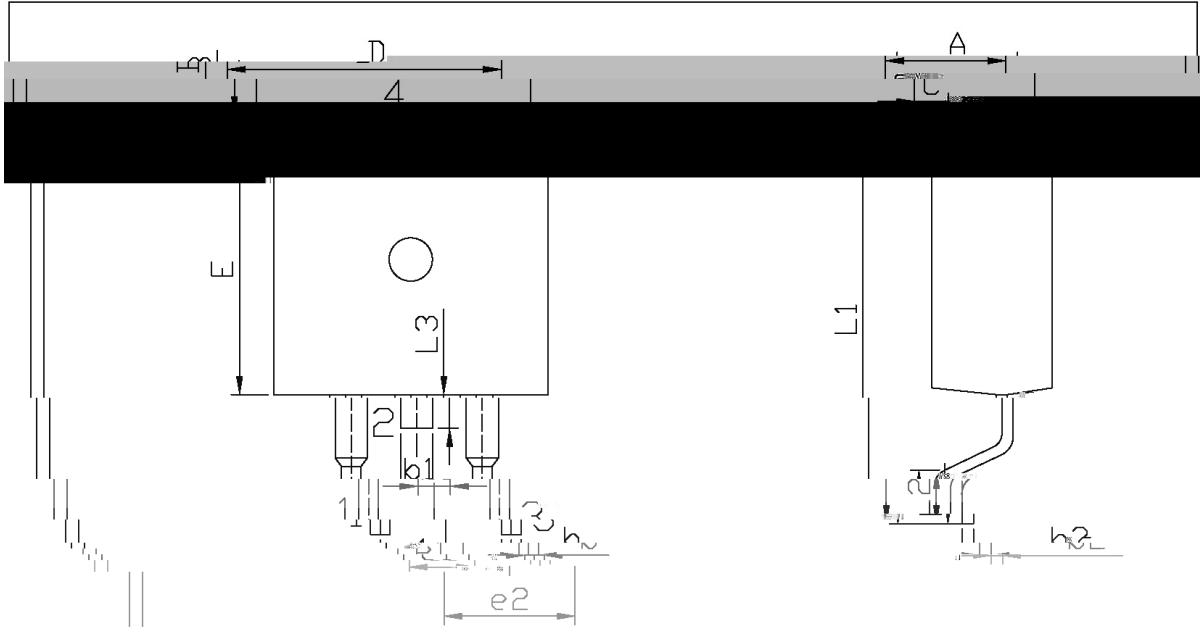

单位: mm

Dimensions in Millimeters		Dimensions in Millimeters	
Max	Min	Max	Min
9.40	4.30	4.70	9.00
2.74	1.00	1.40	2.34

/ Marking Instructions

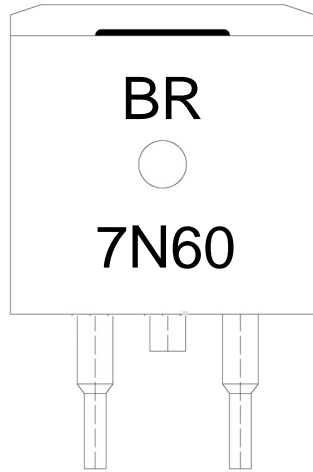

BR

7N60

!!!!


Note:

BR: Company Code

7N60: Product Type.

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

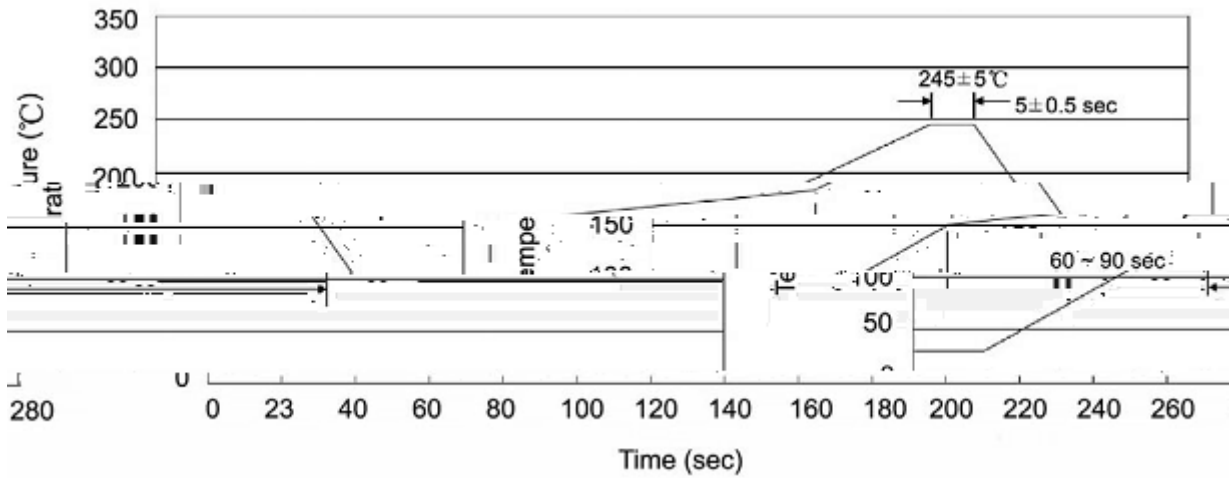

Note:

- | | | | | | |
|---|--------|-----|------------|----------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245..5 | | 5..0.5sec; | | 2.Peak Temp.:245..5 , Duration:5..0.5sec. |
| 3 | | | 2 | 10 /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260..5 10..1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units				Dimension (unit mm ³)		

/ TUBE

Package Type	Units				Dimension (unit mm ³)		