

/ Descriptions

TO-263 N MOS N-CHANNEL MOSFET in a TO-263 Plastic Package.

/ Features


Low gate charge, low crss, fast switching.

/ Applications

GF2GF

These devices are well suited for high efficiency switching DC/DC converters and switch mode power supplies.

/ Equivalent Circuit



/ Pinning



PIN1 G PIN 2,4 D PIN 3 S


/ h_{FE} Classifications & Marking


See Marking Instructions.

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DSS}	650	V
Drain Current	$I_D(T_C=25^\circ\text{C})$	7.0	A
Drain Current	$I_D(T_C=100^\circ\text{C})$	4.4	A
Drain Current - Pulsed	I_{DM}	28	A
Gate-Source Voltage	V_{GS}	± 30	V
Single Pulsed Avalanche Energy	E_{AS}	420	mJ
Repetitive Avalanche Energy	E_{AR}	14.7	mJ
Avalanche Current	I_{AR}	7.0	A
Power Dissipation	$P_D(T_C=25^\circ\text{C})$	147	W
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V$ $I_D=250\mu A$	650			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=650V$ $V_{GS}=0V$			1.0	μA
		$V_{DS}=520V$ $T_C=125^\circ\text{C}$			100	μA
Gate-Body Leakage Current Forward	I_{GSS}	$V_{GS}=\pm 30V$ $V_{DS}=0V$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250\mu A$	2.0		4.0	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$ $I_D=3.5A$			1.3	Ω
Forward Transconductance	g_{FS}	$V_{DS}=40V$ $I_D=3.5A$		8.2		S
Drain-Source Diode Forward Voltage	V_{SD}	$V_{GS}=0V$ $I_S=7.0A$			1.4	V

/ Electrical Characteristic Curve

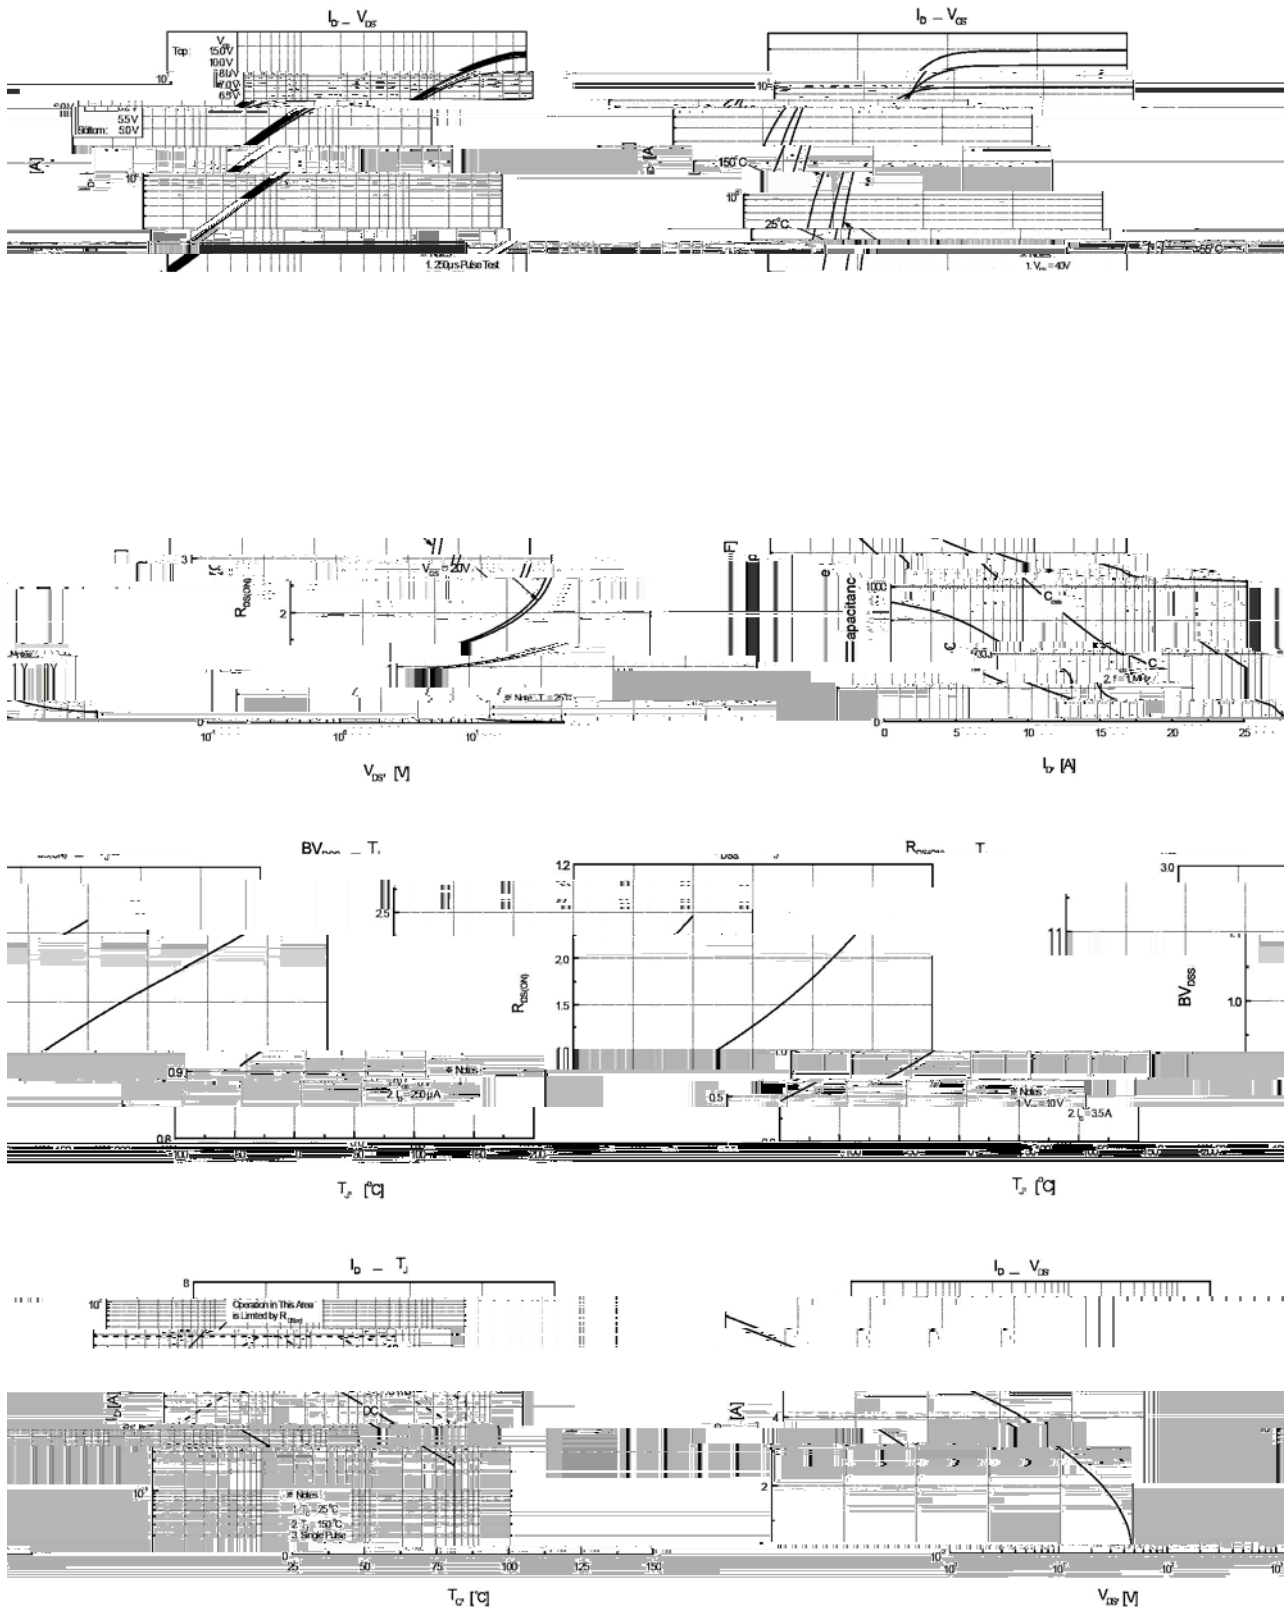

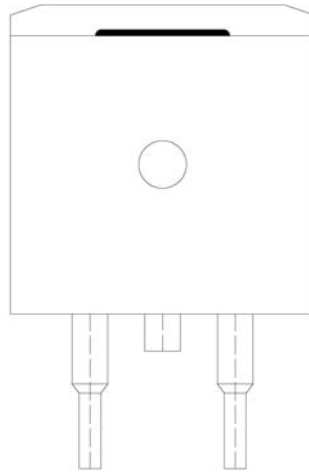

BR
7N65


Note:

BR: Company Code

7N65: Product Type.

***: Lot No. Code, code change with Lot No.

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

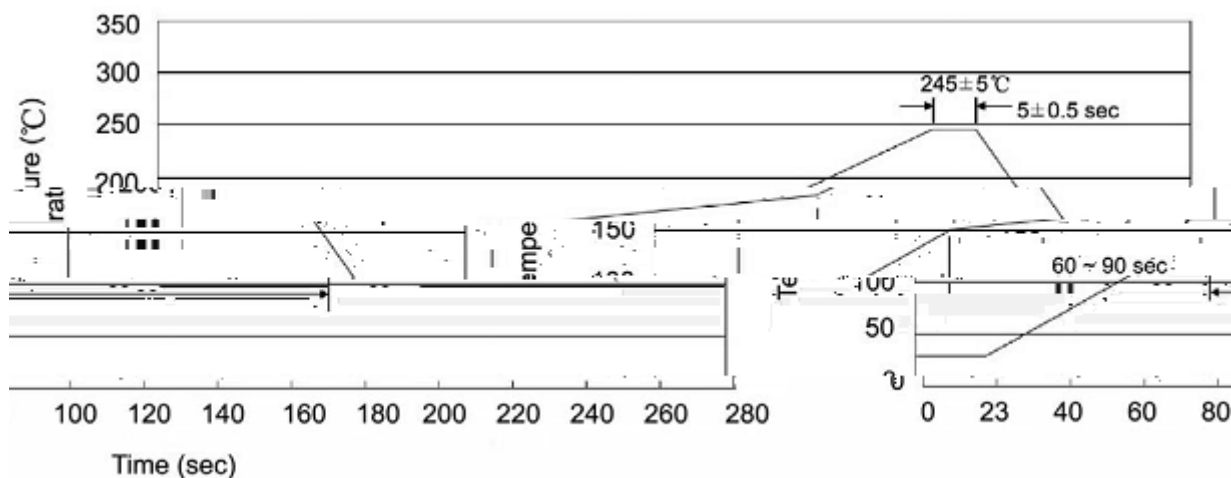

Note:

- | | | | | | |
|---|---------------------|------|------------------------|--------|---|
| 1 | 25 | 150% | 60 | 90sec; | 1.Preheating:25~150%, Time:60~90sec. |
| 2 | 245 ^{±5} % | | 5 ^{±0.5} sec; | | 2.Peak Temp.:245 ^{±5} %, Duration:5 ^{±0.5} sec. |
| 3 | | 2 | 10%/sec. | | 3. Cooling Speed: 2~10%/sec. |

/ Resistance to Soldering Heat Test Conditions

260^{±5}% 10^{±1} sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
TO-263	800	1	800	5	4,000	13 ×24	360×360×50	385×257×392

/ TUBE