


**BRBAS19Q~BRBAS21Q**

# **BRBAS19Q~BRBAS21Q**

Rev.A Apr.-2022


# BRBAS19Q~BRBAS21Q

Rev.A Apr.-2022




DATA SHEET

Parameter	Symbol	Rating			Unit
		BRBAS19Q	BRBAS20Q	BRBAS21Q	
Repetitive Reverse Voltage	$V_{RRM}$	120	200		



## / Electrical Characteristic Curve

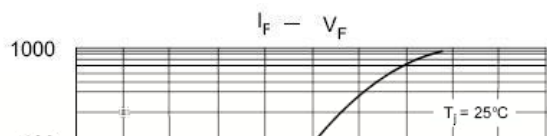


# **BRBAS19Q~BRBAS21Q**

Rev.A Apr.-2022

71 T f .

<http://www.fsbrec.com>

R hvc hv



( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)


- 1 150 200 60 120sec;
- 2 255±5 5±0.5sec
- 3 2 10 /sec. Soldering Speed: 2~10 /sec.
- e

