

BRCS020N04BD

MB



蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET

§202

5 é / Descriptions

∅ .> // x N ?ú 3 « | •'ož

■

z Š •¼ , † ½ k —)í D }ož

; RZXG 2UJ 5T 8KYOYZGTIK. ,L 6XUJYI]D ZINOTM

¥ ~ ^ 9 ä | › % ^ k " 6 ,) è y Â 9 ! " ÷ È ã ÿ - ° ož



⊞

⊞

É

⊞

⊞

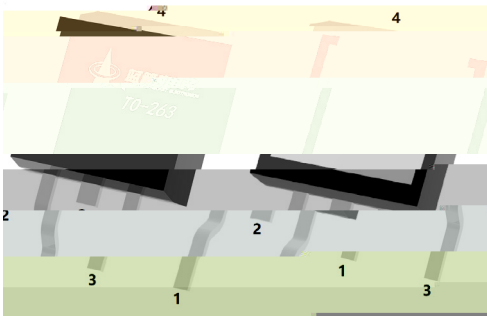

⊞ yG

o•4 yD

yS

, M V / Marking

• - ~ a ϕ ož

BRCS020N04BD

RB



蓝箭电子
BLUE ROCKET ELECTRONICS




DATA SHEET

§202




@ f
B

... Z


Electrical Characteristic Curve

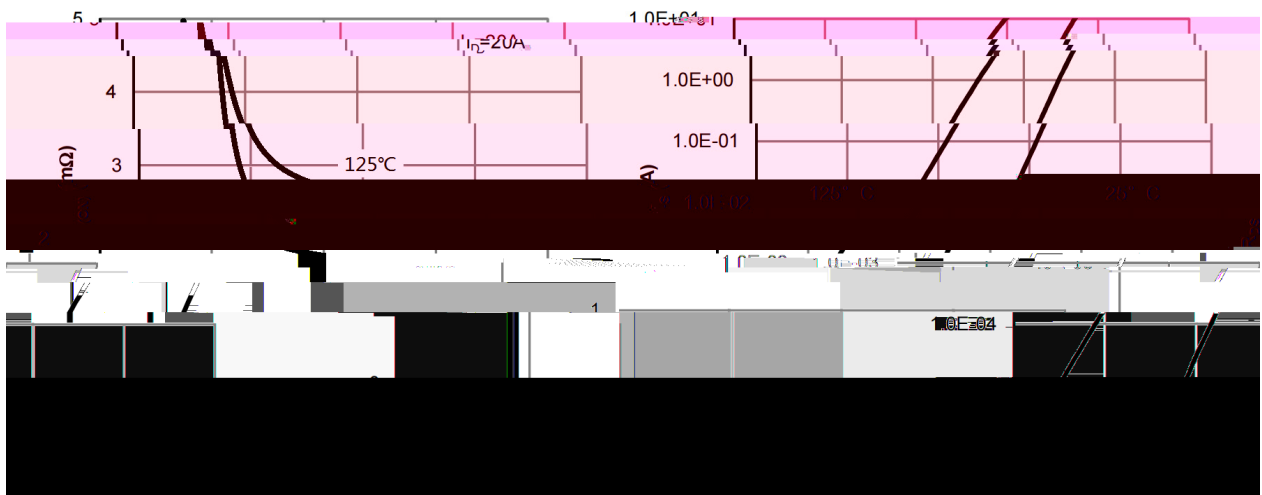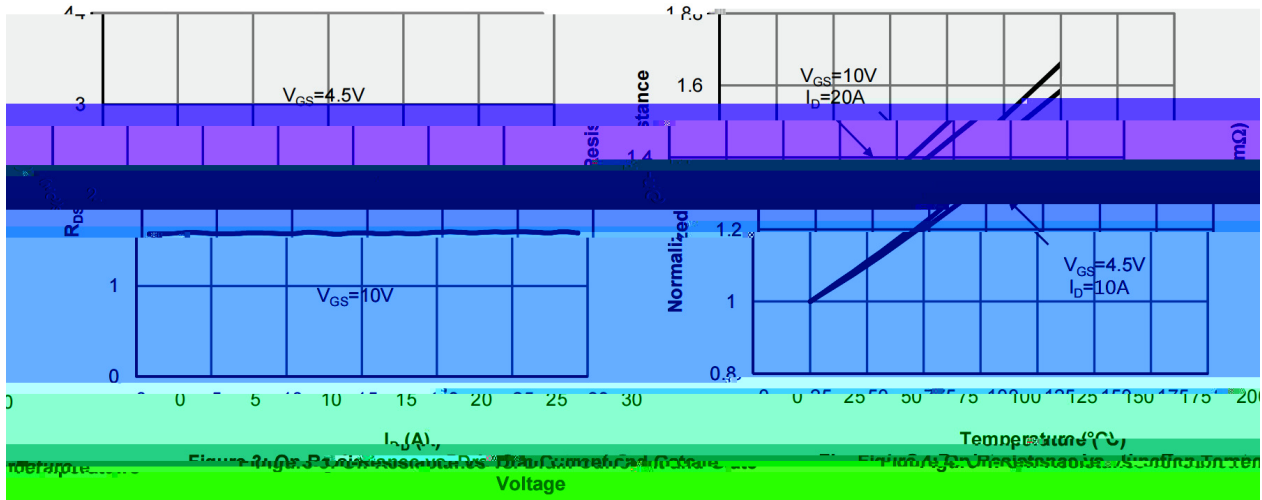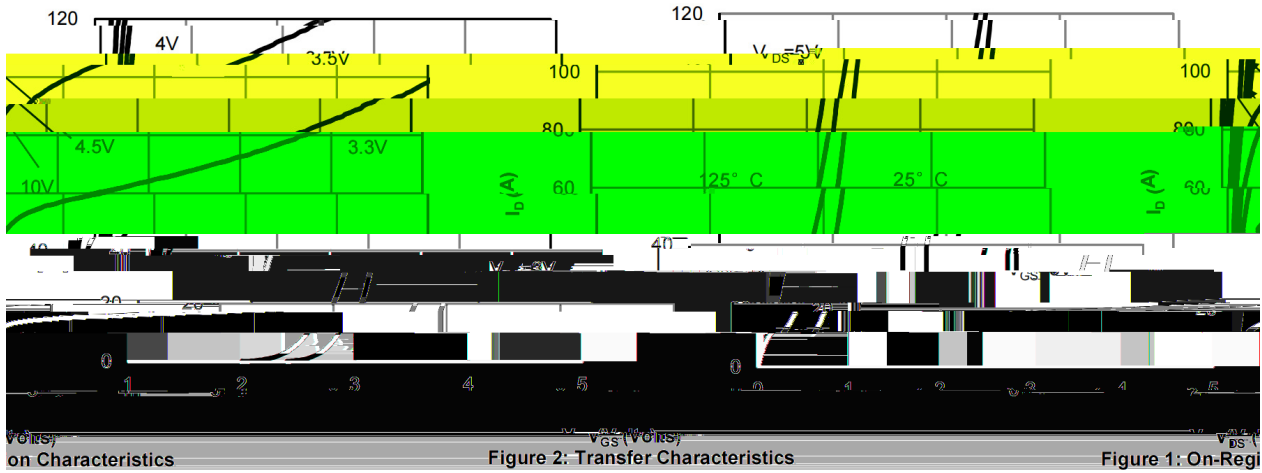

Electrical Characteristic Curve

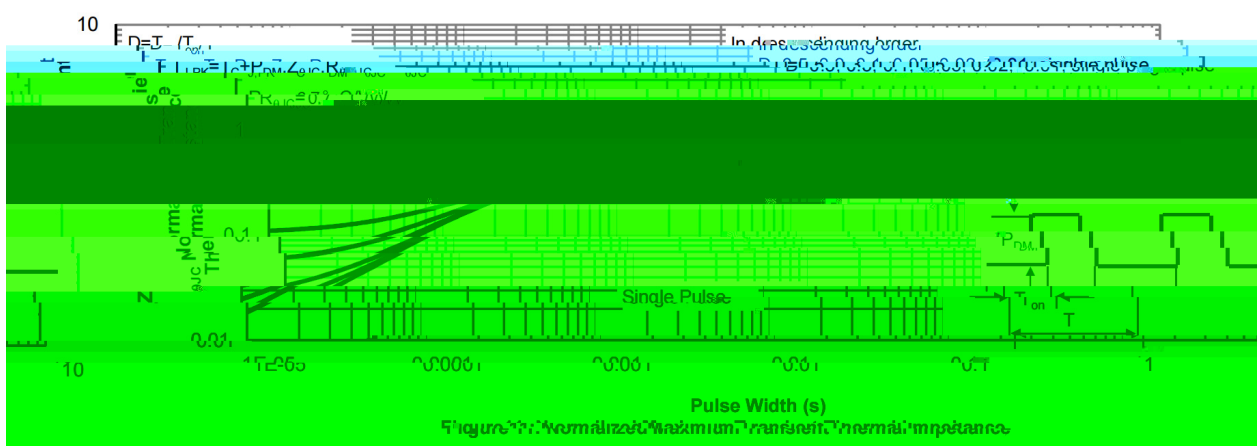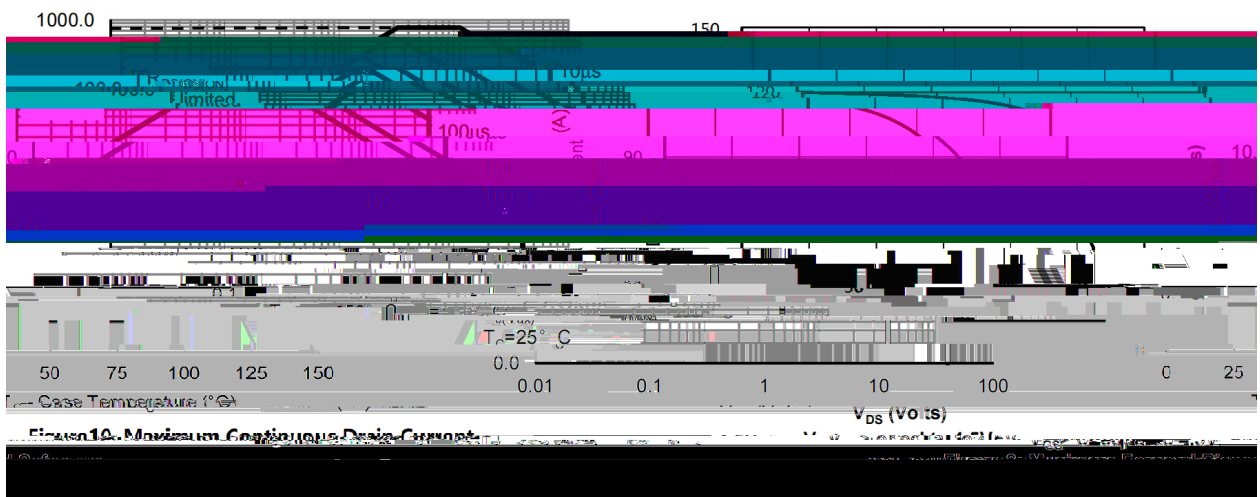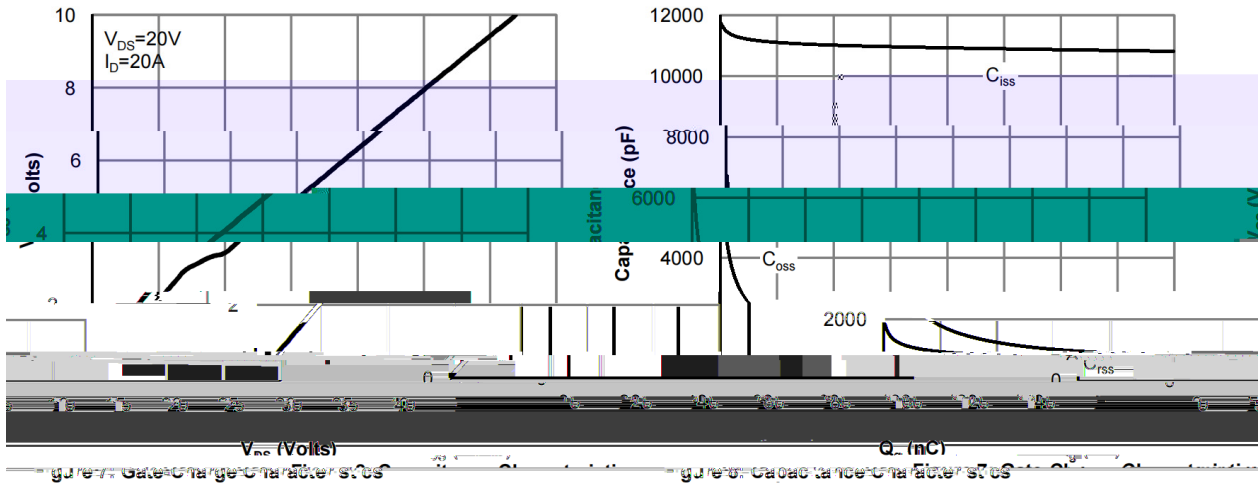


∅ □ =) ∅ / Package Dimensions

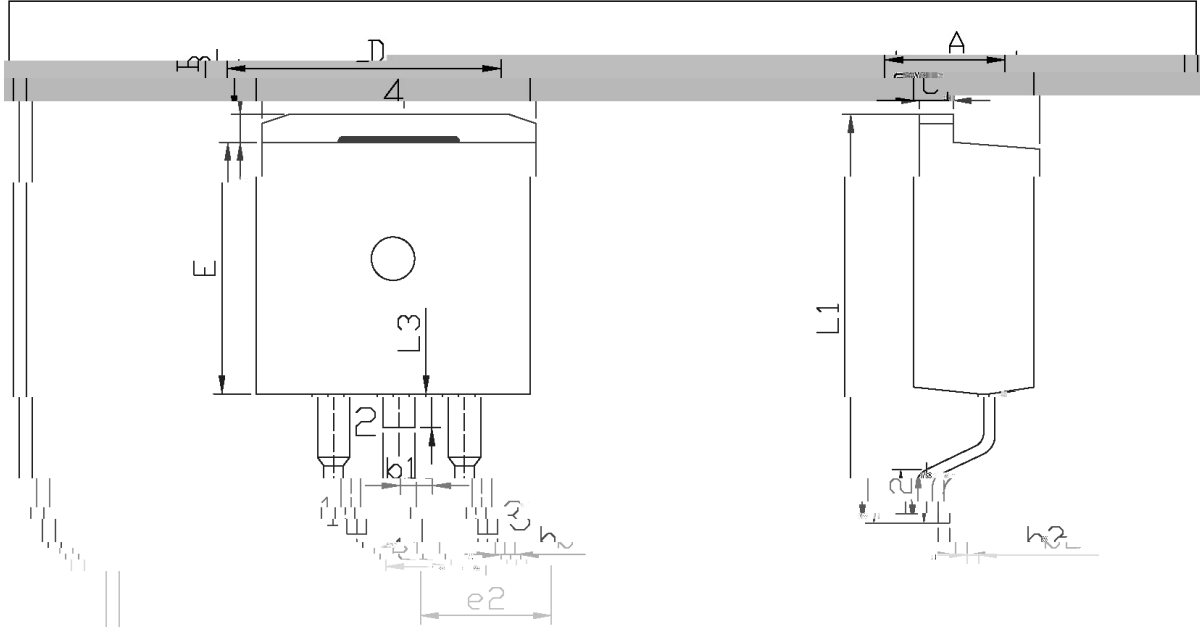

单位: mm

Dimensions in Millimeters	Dimensions in Millimeters	Dimensions in Millimeters	Dimensions in Millimeters	
Max	Min	Max	Min	
9.40	A	4.30	E	9.00
2.74	B	1.00	e1	2.34
0.88	b1	0.80	e2	1.40
0.00	L1	1.15	L2	1.40

, My f / Marking Instructions

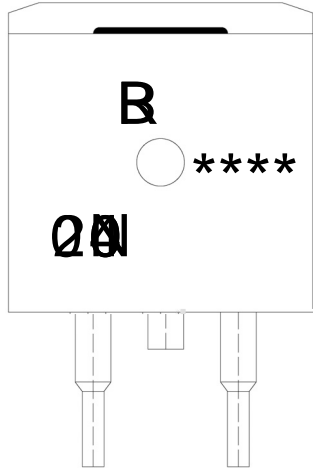


^a ϕ y
 (8 y , [WA
 4 y ° ZWA
 y ÿD ZWAKšÿD ZJ
 bl
 B ϕ
 Q0t
 * b



šWD t...•Žč (x/) / :KSVKXGZ[XK 6XULORK LUX /8 8KLRU] 9URJKXOTM 6

7HPSHUDWUXUH

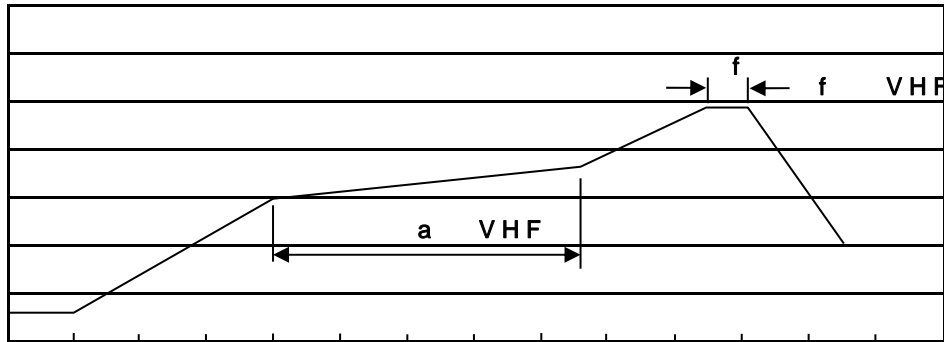

7LPH VHF

a ç y

10•Ä½“† 0 ½0 -kž• 0 ½0

20•Q›“† 245r5-kž•4Ò 5r05

10•D NòìÒ0,† 2½0 - /e

- ,

r5 - ,

- /e

r05

ÄD /Cã p~ »] / Resistance to Soldering Heat Test Conditions

“†y 20 r5- ž•y 0 r1

G P á / Packaging SPEC.

2 & x

E	b ;>û IH					;>û p . (m)		
	Units/Reel /--	Reels/Inner Box -- /-	Units/Inner Box /-	Inner Boxes/Outer Box - /!ç	Units/Outer Box /!ç	Reel s 24	Inner Box	Outer Boxç
0								

ì' x

E	b ;>û IH					;>û p . (m)		
	Units/Tube /•1x	Tubes/Inner Box •1x /-	Units/Inner Box /-	Inner Boxes/Outer Box - /!ç	Units/Outer Box /!ç	Tube•1x	Inner Box	Outer Boxç
0								

„Ð y f / Notices