

/ Descriptions

PDFN5×6 N

N-Channel MOSFET in a PDFN5×6 Plastic Package.

/ Features

$V_{DS}(V)=60\text{ V}$ $I_D=158\text{ A}$

$R_{DS(ON)}@10\text{ V}$ 2.0m (Typ.1.8mR)

$R_{DS(ON)}@4.5\text{ V}$ 3.0m (Typ.2.5mR)

AEC-Q101
HF Product.


Qualified to AEC-Q101 Standards for High Reliability,

/ Applications


DC-DC

Secondary Side Synchronous Rectification,DC-DC Converter, Motor Control, Load Switching, Meet the stringent requirements of automotive applications.

/ Equivalent Circuit



/ Pinning

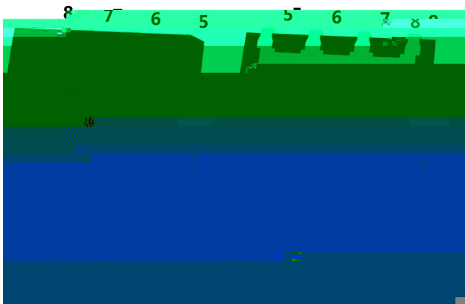

PIN1 2 3 S PIN4 G PIN5 6 7 8 D

/ Marking

See Marking Instructions.

B RCS020N06SZCQ

Rev.B Dec.-2024






DATA SHEET

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	60	V
Continuous Drain Current	$I_D(T_C=25^\circ\text{C})$	158	A
Pulsed Drain Current	I_{DM}	316	A
Gate-Source Voltage	V_{GS}	± 20	V
Power Dissipation	$P_D(T_C=25^\circ\text{C})$	90	W
Avalanche energy(L=0.5mH)	E_{AS}	380	mJ
Avalanche Current(L=0.5mH)	I_{AS}	30.8	A
Junction and Storage Temperature Range	T_j, T_{stg}	-55 to 150	
Maximum Junction-to-Ambient	R_{JA}	20	/W




/ Electrical Characteristics(Ta=25

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Delay Time	$t_{d(on)}$	$V_{GS}=10V$ $V_{DS}=20V$ $R_L=1$ $R_{GEN}=3$		13		ns
Turn-On Rise Time	t_r			4		
Turn-Off Delay Time	$t_{d(off)}$			47		
Turn-Off Fall Time	t_f			6.5		

/ Electrical Characteristic Curve

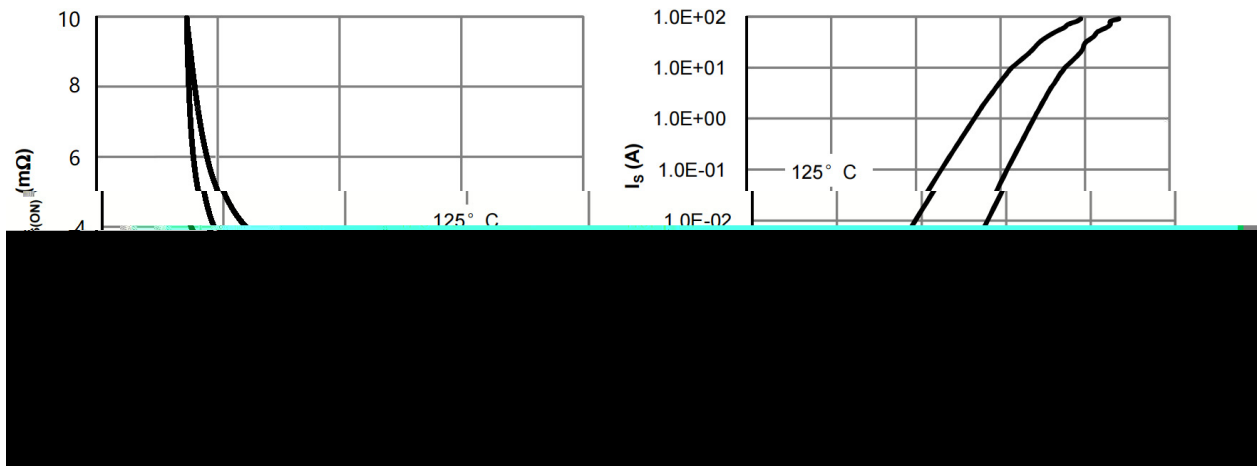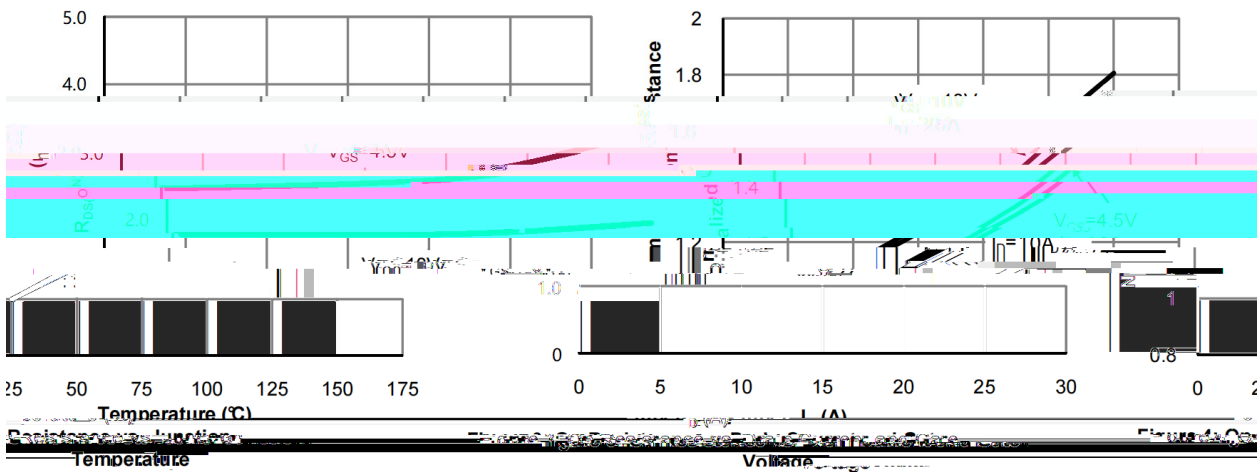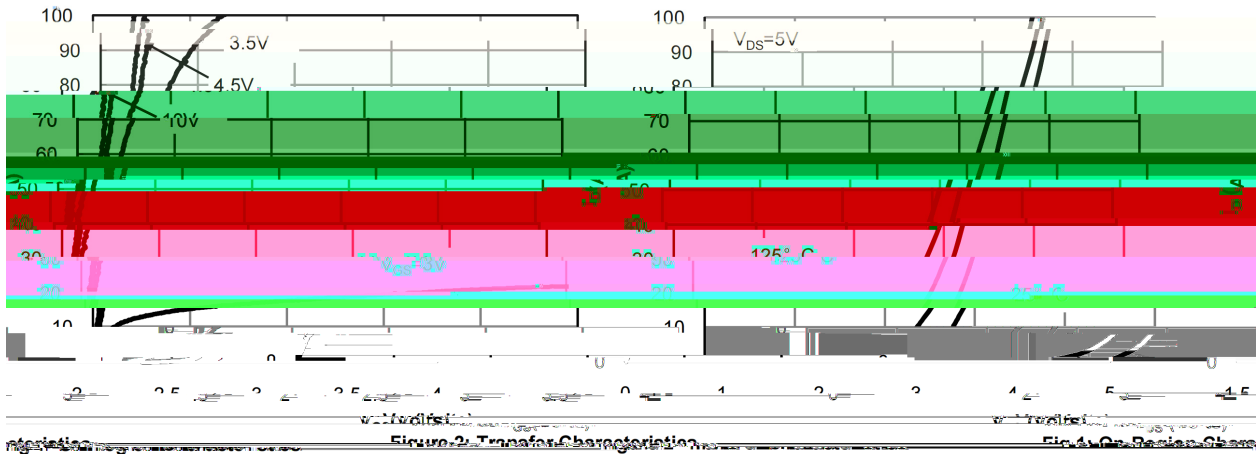


/ Electrical Characteristic Curve

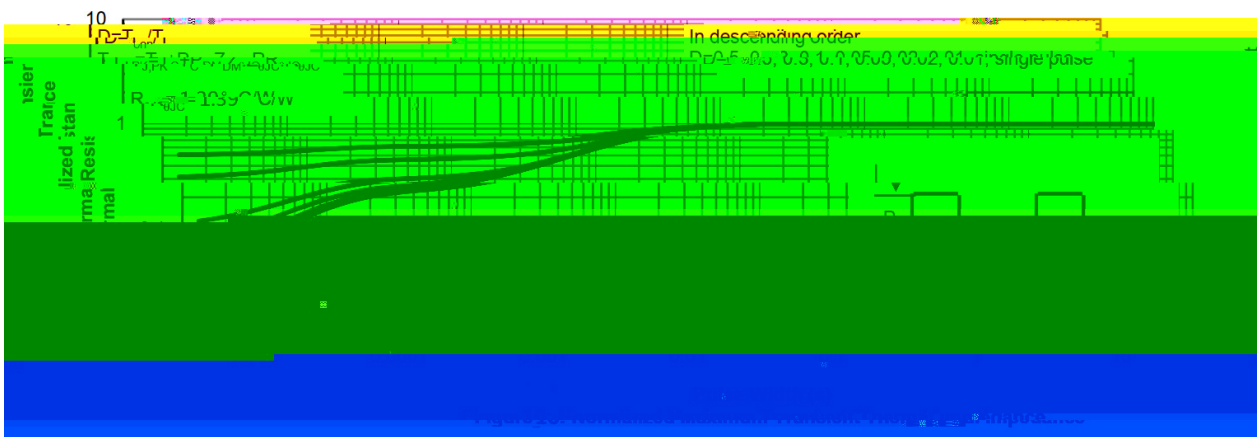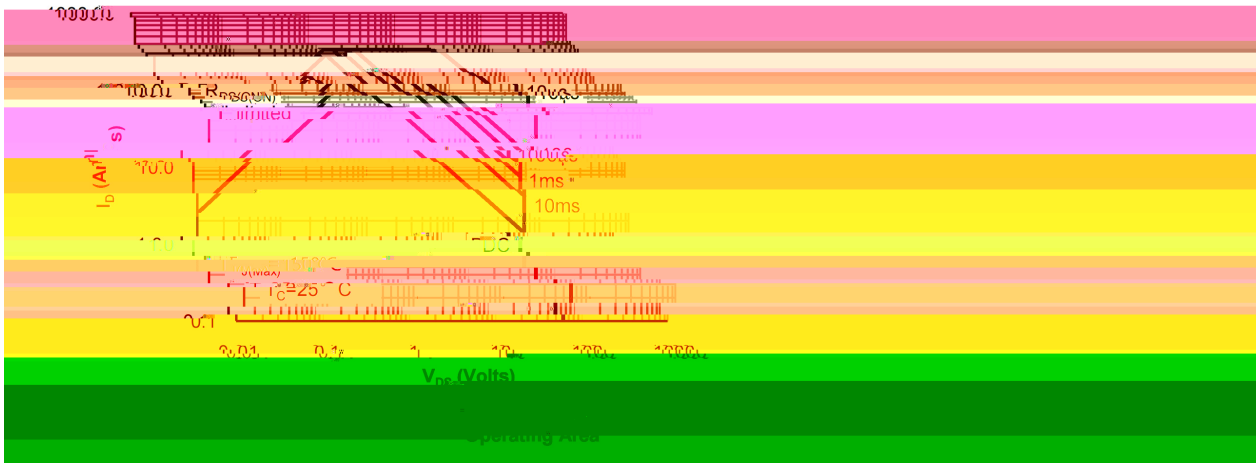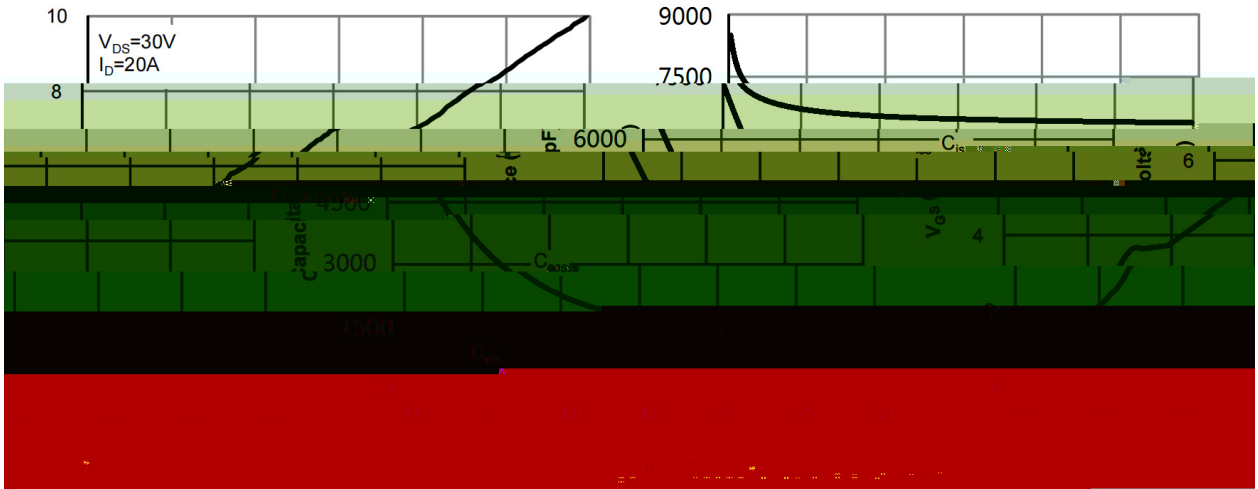

/ Package Dimensions

PDFN5 X6

Unit:mm

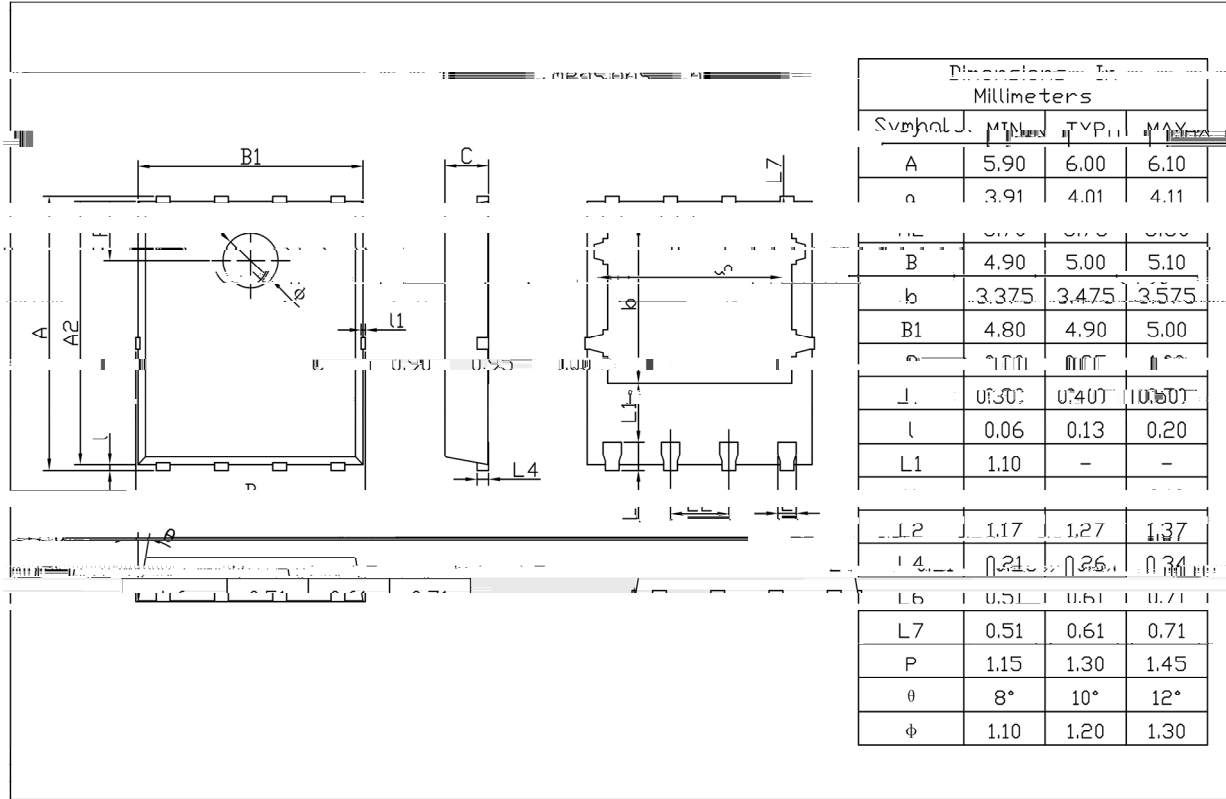

Rev.01 202209

/ Marking Instructions



BR

Q

020N06S

Note

BR

Company Code

Q:

Automobile halogen-free product Code

020N06S

Product Type Code

****:

Lot No. Code, code change with Lot No

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

- 1 150 ~ 200 60 ~ 120sec; 1.Preheating:150~200 , Time:60~120sec.
- 2 255±5 5±0.5sec; 2.Peak Temp.:255±5 , Duration:5±0.5sec.
- 3 2 ~ 10 /sec. 3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC. () 2 (/) 5.7 (Packagin. 1.0004 0 g 57.66 450004 0 g 576ckagin 1 T84 T.77371