



PDFN5×6 N
N-Channel MOSFET in a PDFN5×6 Plastic Package .

Low $R_{DS(ON)}$ to minimize conductive loss;low Gate Charge for fast switching;Low Thermal resistance;HF Product.


N




Parameter	Symbol	Rating	Unit
Drain-SouD			




Parameter	Symbol	Test Conditions	Min	Max	Unit
Turn-On Delay Time	$t_{d(on)}$				
Turn-On Rise Time	t_r	$V_{GS}=10V$ $R_L=50\Omega$			ns

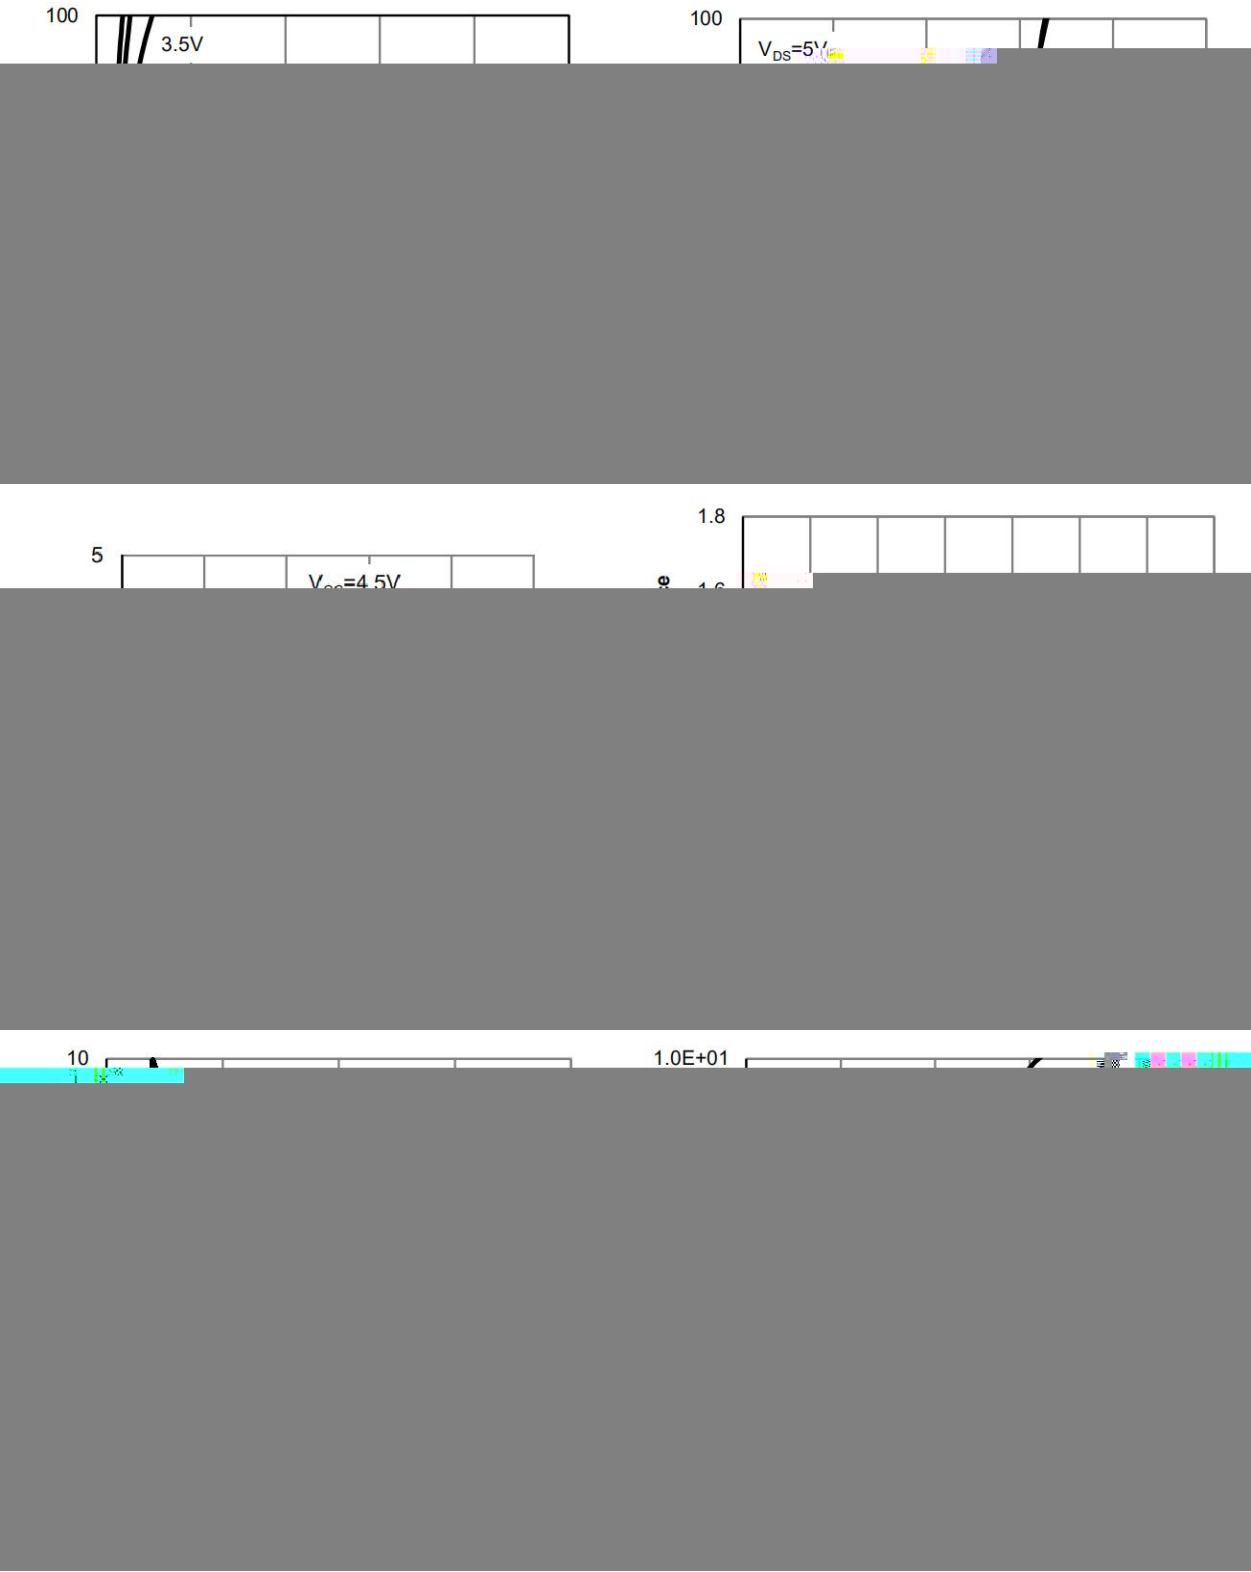

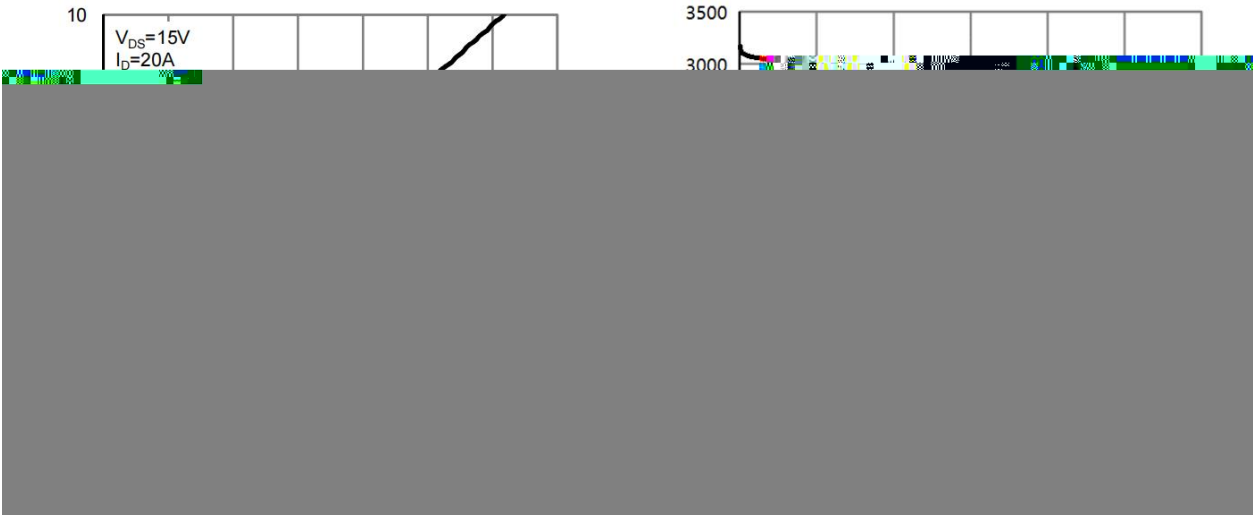

Doc 00.201012.....

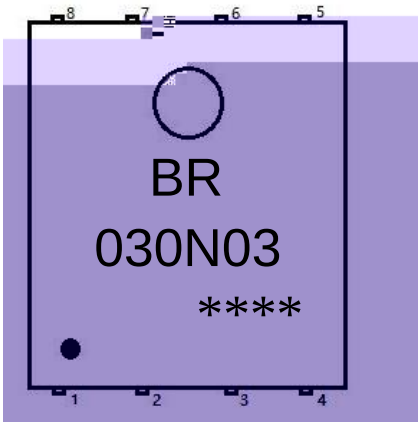

BR	
030N03	

Note	
BR	Company Code
030N03	Product Type
****:	Lot No. Code, code change with Lot No

