



Rev.A Oct.-2023

TO-252 N
 N-CHANNEL MOSFET in a TO-252 Plastic Package.

$R_{DS(on)}$ C_{rSS} AEC-Q101
 Low $R_{DS(on)}$, low gate charge, low C_{rSS} , fast switching, Qualified to AEC-Q101 Standards for High Reliability, HF Product.

DC/DC

Suited for low voltage applications such as automotive, DC/DC Converters, and high efficiency switching for power management in portable and battery operated products, Meet the stringent requirements of automotive applications.

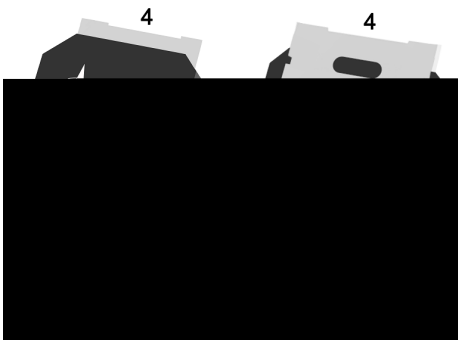

PIN 1 G PIN 2 D PIN 3 S PIN 4 D




See Marking Instructions.

Parameter	Symbol	Rating	Unit	
Drain-Source Voltage	V_{DSS}	40	V	
Drain Current	$I_D(T_C=25^\circ\text{C})$	150	A	
Drain Current - Pulsed	I_{DM}	304	A	
Gate-Source Voltage	V_{GS}	± 20	V	
Avalanche Current	I_{AS}	33	A	
Single Pulsed Avalanche Energy(L=0.5mH)	E_{AS}	435	mJ	
Power Dissipation	$P_D(T_C=25^\circ\text{C})$	120	W	
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150		
Thermal Resistance-Junction to Ambient	t 10s	R_{JA}	20	/W
	Steady-State		50	
Thermal Resistance-Junction to Case	Steady-State	R_{JC}	1.04	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V$ $I_D=250\text{ A}$	40			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=40V$ $V_{GS}=0V$			1.0	A
Gate-Body Leakage Current Forward	I_{GSS}	$V_{GS}=\pm 20V$ $V_{DS}=0V$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250\text{ A}$	1.0	1.7	2.5	V

Static Drain-Source

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Tu.0037 TwD4 3ditions						

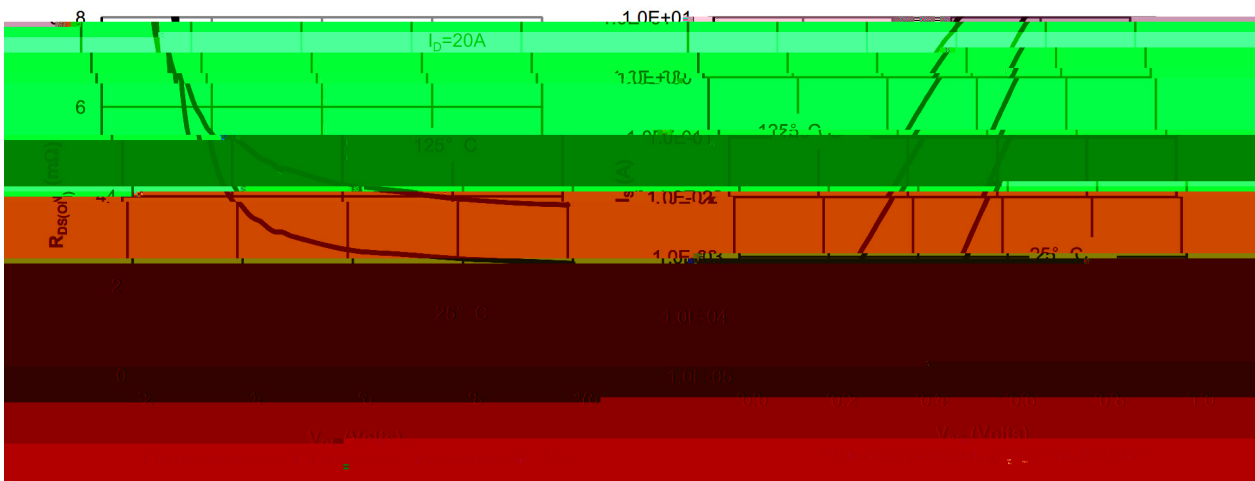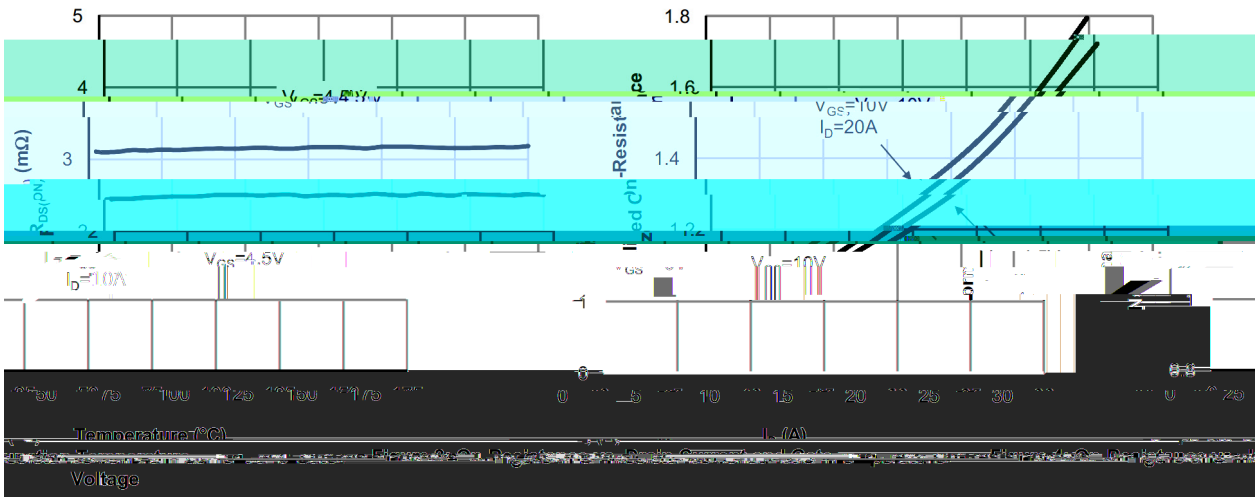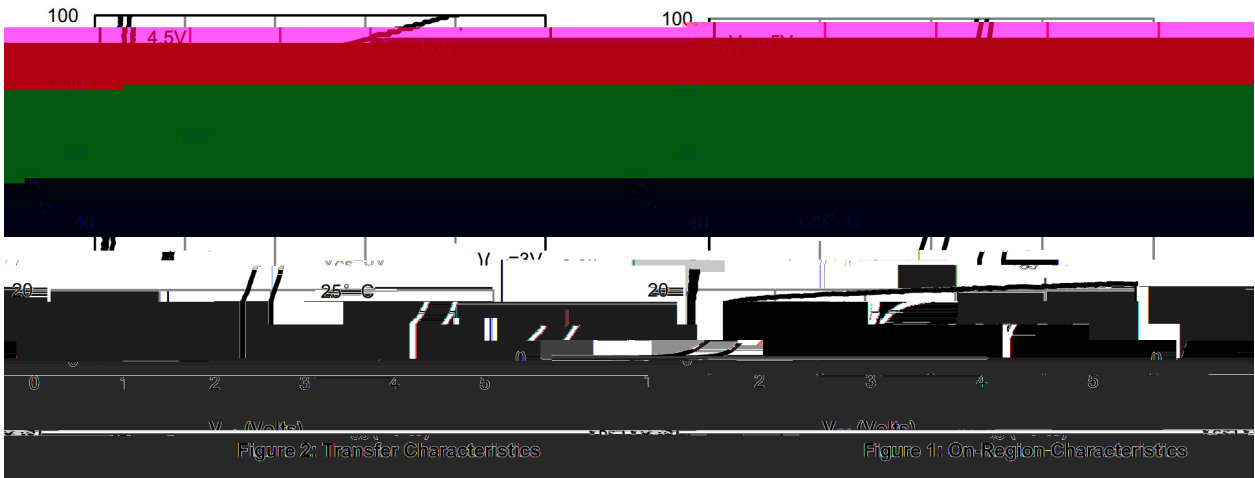

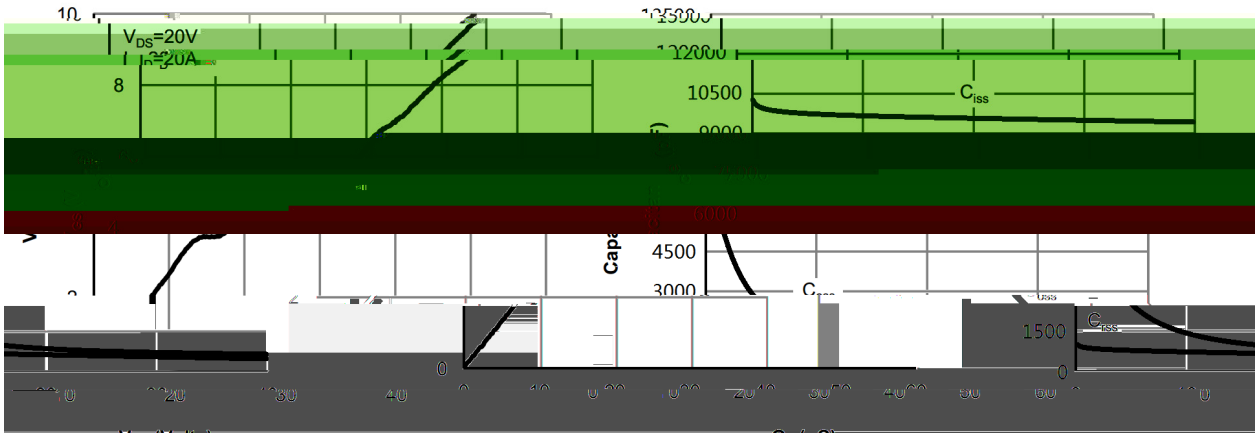


Figure 6: Capacitance C_{iss} Characteristics Figure 7: Capacitance C_{oss} Characteristics



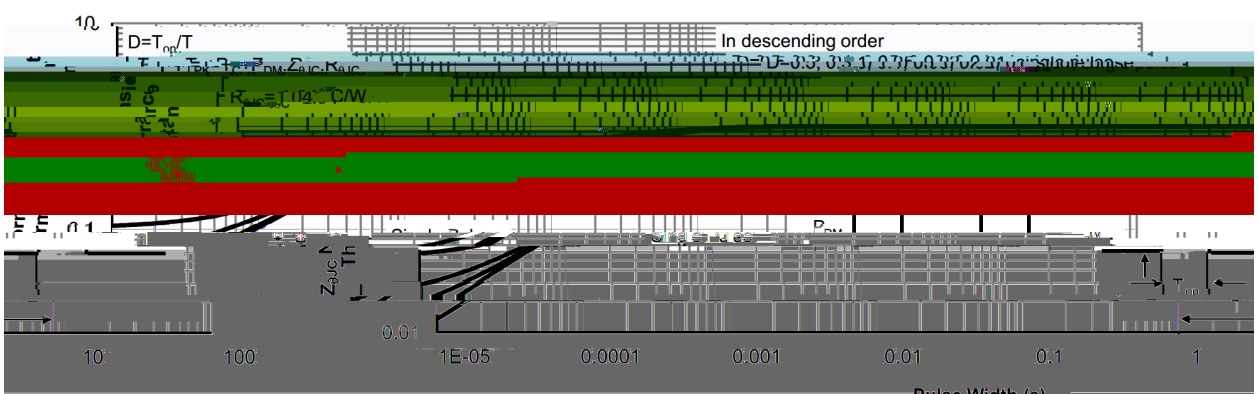



Figure 10: Thermal Impedance Characteristics

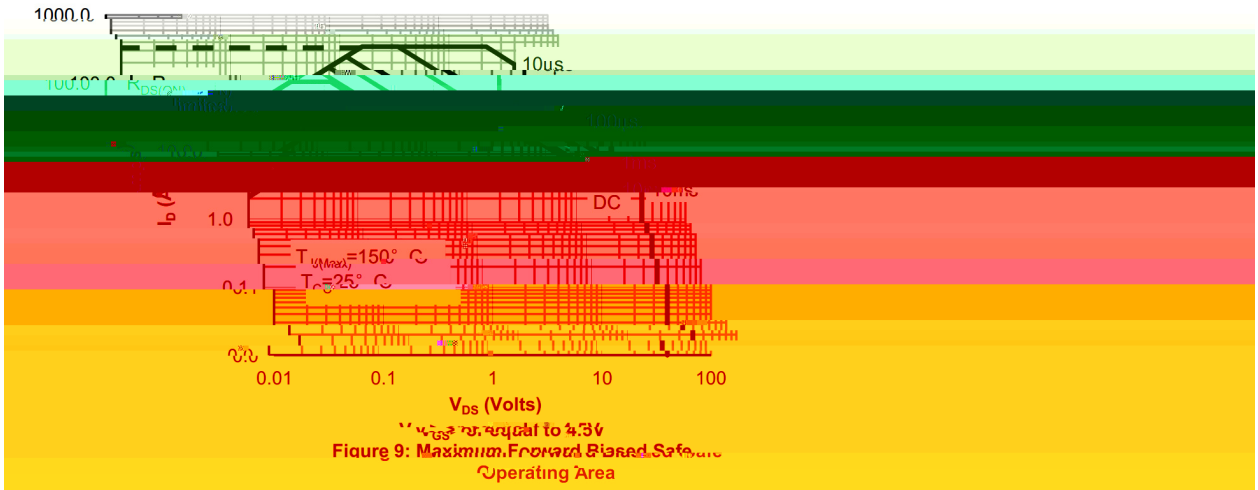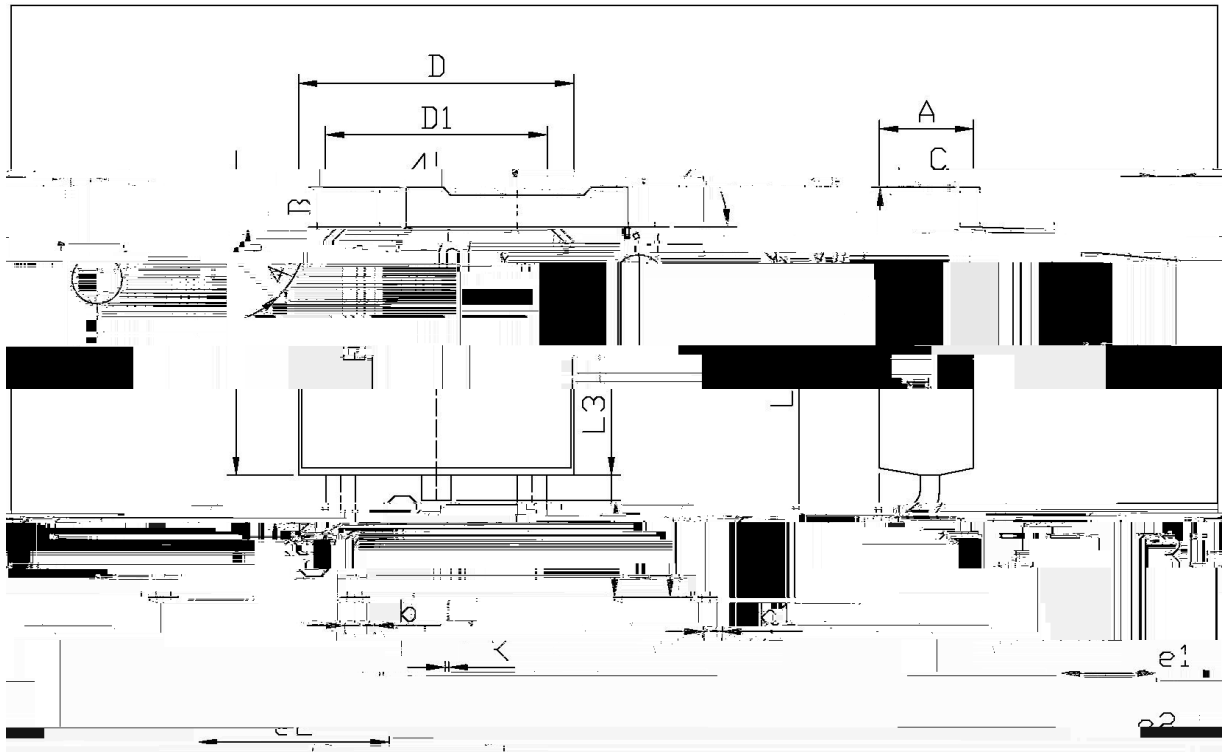

单位: mm

Dimensions		Millimeters		Dimensions		In Millimeters	
Min	Max	Symbol	Min	Max	Symbol	Min	Max
		B	0.95	1.25	e1	2.24	2.32
		b	0.70	0.90	k	4.18	4.22
		CL	0.75	0.75	e2	9.85	10.35
		L3	0.15	0.25	L	1.50	1.50
		D1	6.45	6.76	D	10.25	10.60
		D	5.10	5.50	k	0.30	0.30

TO-252

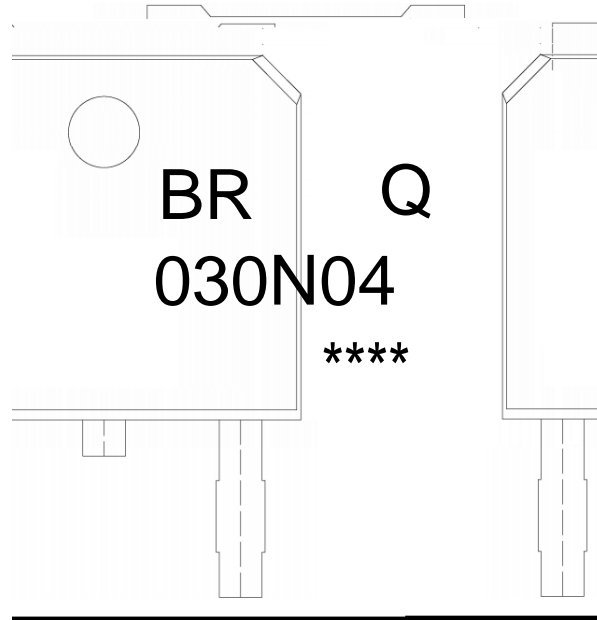

BR

Q

030N04

Note:

BR: Company Code

Q: Automobile halogen-free product Code

030N04: Product Type Code

****: Lot No. Code, code change with Lot No

Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

- | | | | |
|---|-----------|--------------|---|
| 1 | 150 ~ 200 | 60 ~ 120sec; | 1.Preheating:150~200 , Time:60~120sec. |
| 2 | 255±5 | 5±0.5sec; | 2.Peak Temp.:255±5 , Duration:5±0.5sec. |
| 3 | 2 ~ 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

260±5	10±1 sec.	Temp.:260±5	Time:10±1 sec
-------	-----------	-------------	---------------

/ REEL