

BRCS050N03DSC



蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET




@ f	... Z	f >	% y
----------------------------	------------------------------	-------------------------------	----------------------------

BRCS050N03DSC

$\frac{1}{f}$	$\dots Z$	$y i \acute{U} ^$	$\hat{A} 4 >$	$\acute{A} ^\circ >$	$\hat{A} \acute{Y} >$	$\% y$
t				1	8	
t	r	$V_B \times V$		1	8	
t		R_L		8	8	
t	f			0	8	

Electrical Characteristics

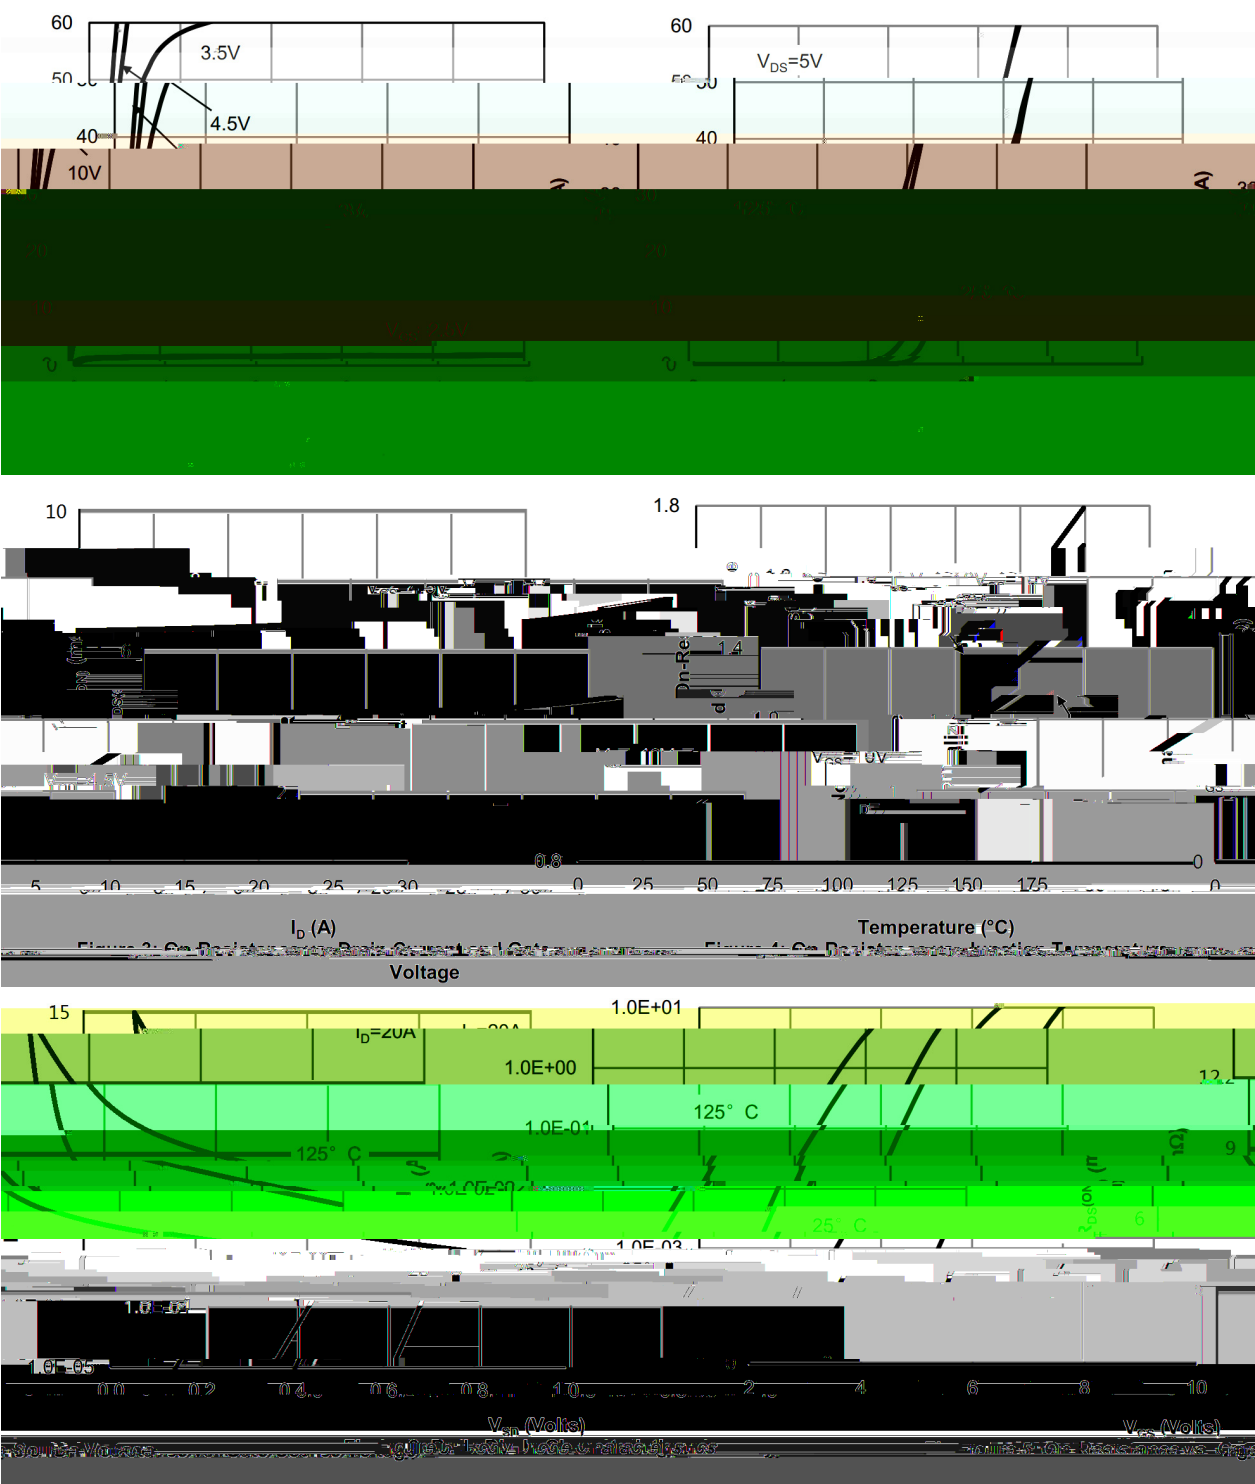

Electrical Characteristics

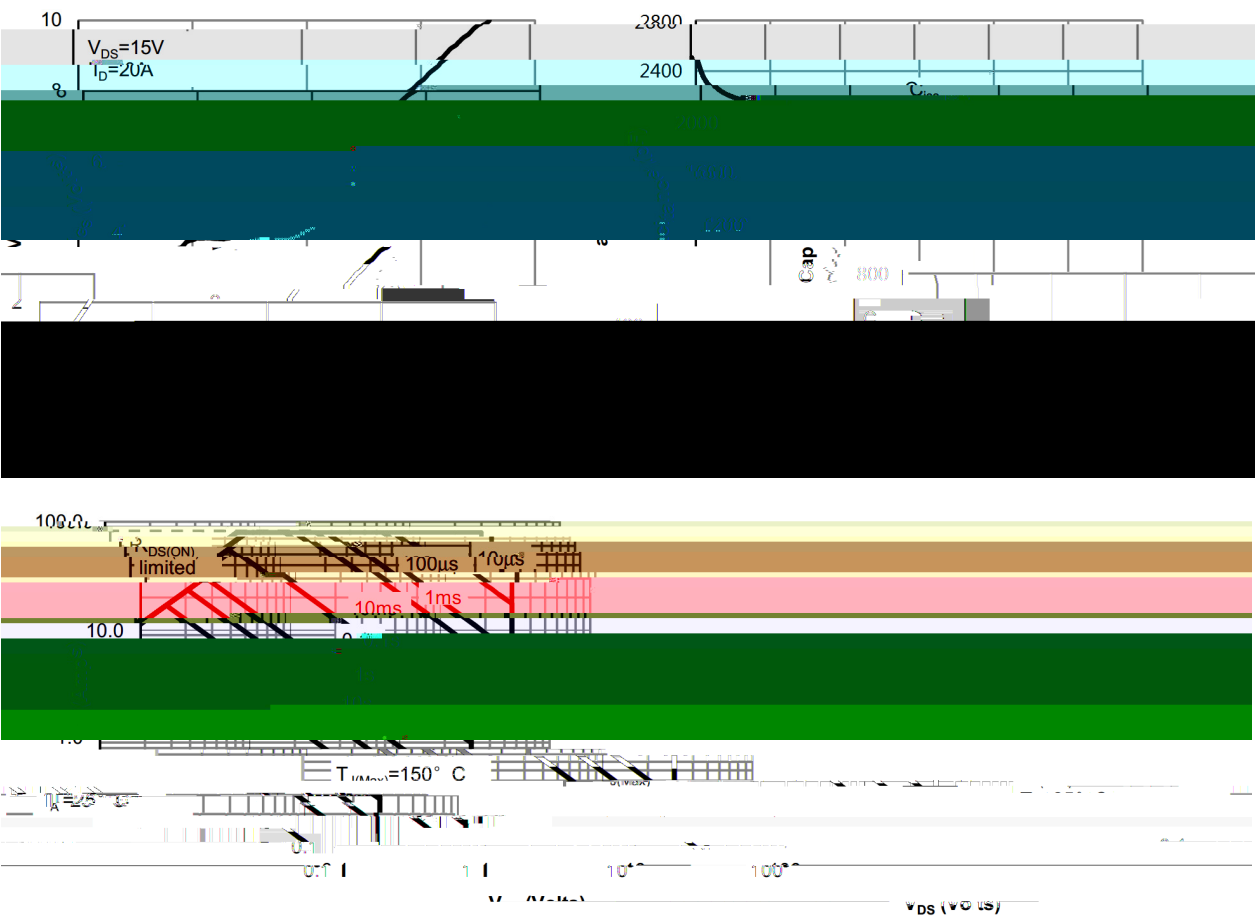


Figure 9: Maximum Forward Biased Safe Operating Area


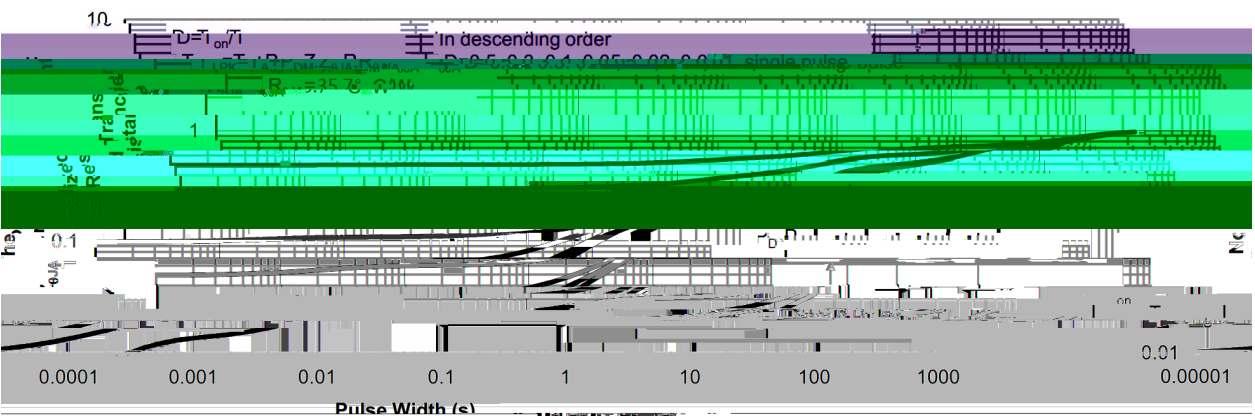


Figure 10: Normalized Maximum Transient Thermal Impedance

BRCS050N03DSC

, My f / Ma g l b b

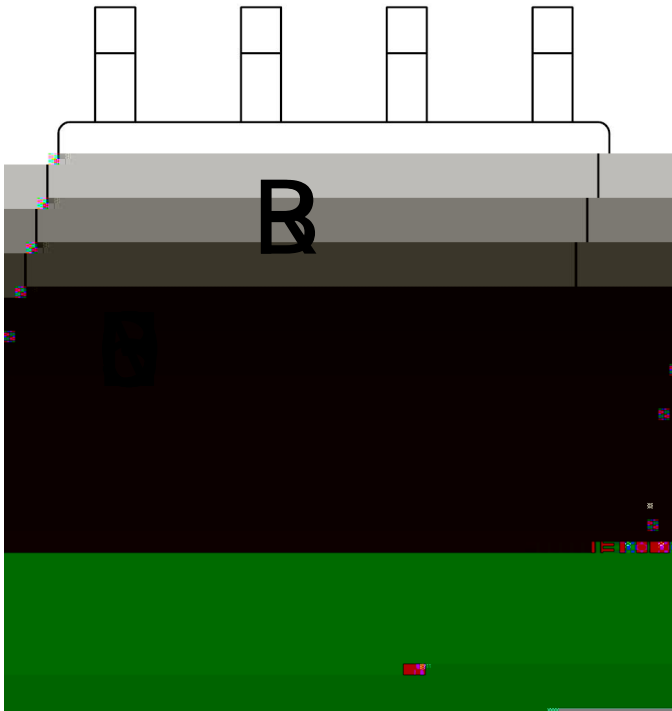

a ¢ y
R y , [W A
y ° Z W A
* y ŷ D Z W A k š ŷ D Z J
R
R
R
*

šWD t...•Žč (x/) / :KSVKXGZ[XK 6XULORK LUX /8 8KLRU] 9URJKXOTM 6

ačy
10•Ä½“† ½ -kž• ½
20•Q>“† r5-kž•4Ò 5r r5- r
30•D NòìÒ0,† 2½ - 3 -

ÂD /Căp»] / Resistor Heat Test

“†y r5- ž•y r

G P á / Packag SPEC.

2 & x /R

7>û~E	>ûH	>ûp. (m³)
-------	-----	-----------