

BRCS080N04ZB

Rev.A May.-2022



DATA SHEET



BRCs080N04ZB


Rev.A May.-2022

N-Channel Enhancement Mode Field Effect Transistor in a DFN3 3A-8L Plastic Package.

$$V_{DS} (V) = 40V$$

$$I_D = 40A (V_{GS} = \pm 20V)$$

Suited for low voltage applications such as automotive, DC/DC Converters, and high efficiency switching for power management in portable and battery operated products.



/ Marking

See Marking Instructions.

BRCS080N04ZB

Rev.A May.-2022




DATA SHEET




/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Total Gate Charge	$Q_{g(10V)}$	$V_{DS}=20V$ $V_{GS}=4.5V$ $I_D=20A$		20		nC
Total Gate Charge	$Q_{g(4.5V)}$			8.5		
Gate-Source Charge	Q_{gs}			5.5		
Gate-Drain Charge	Q_{gd}			3		

/ Electrical Characteristic Curve

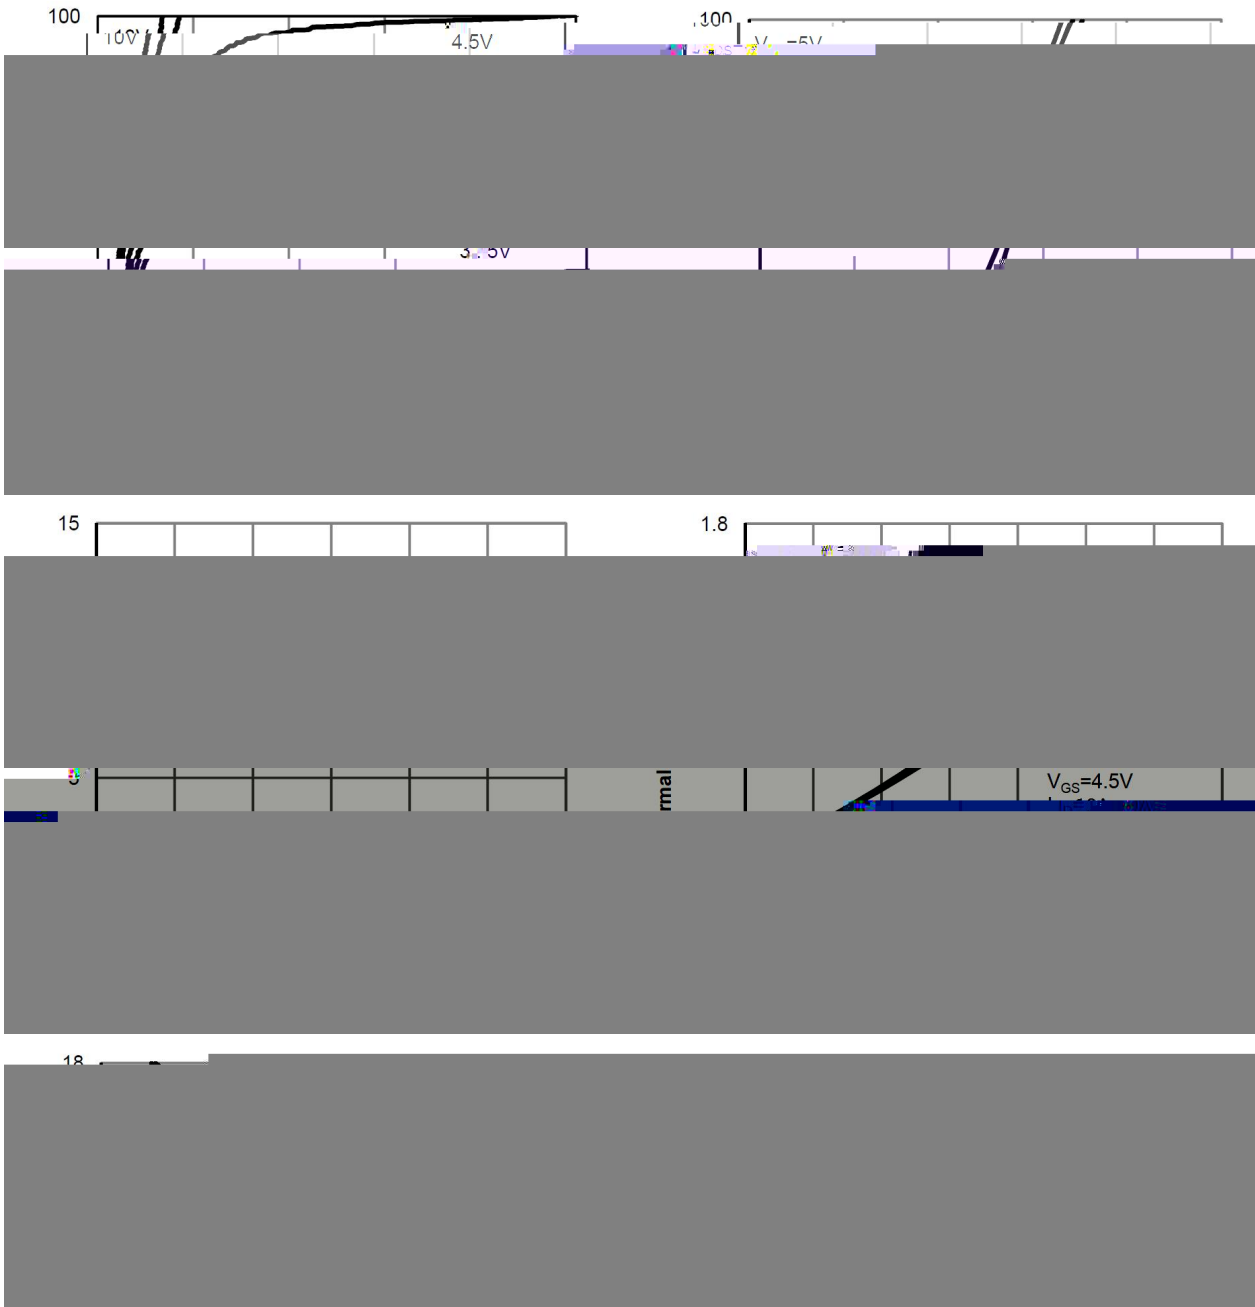


/ Electrical Characteristic Curve

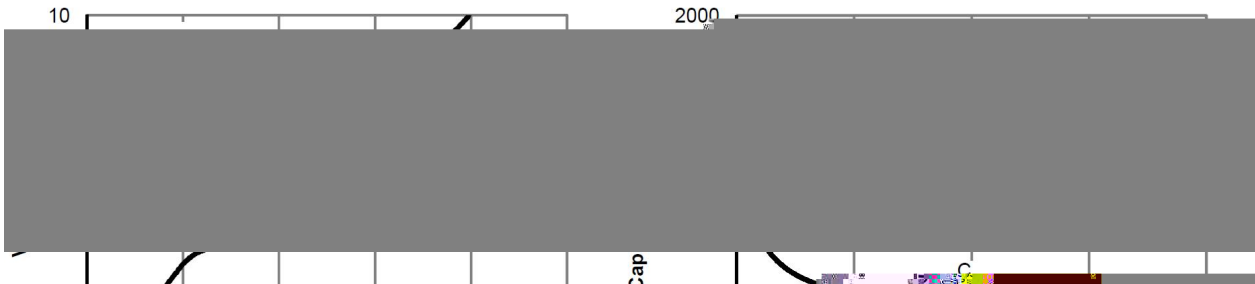




/ Package Dimensions

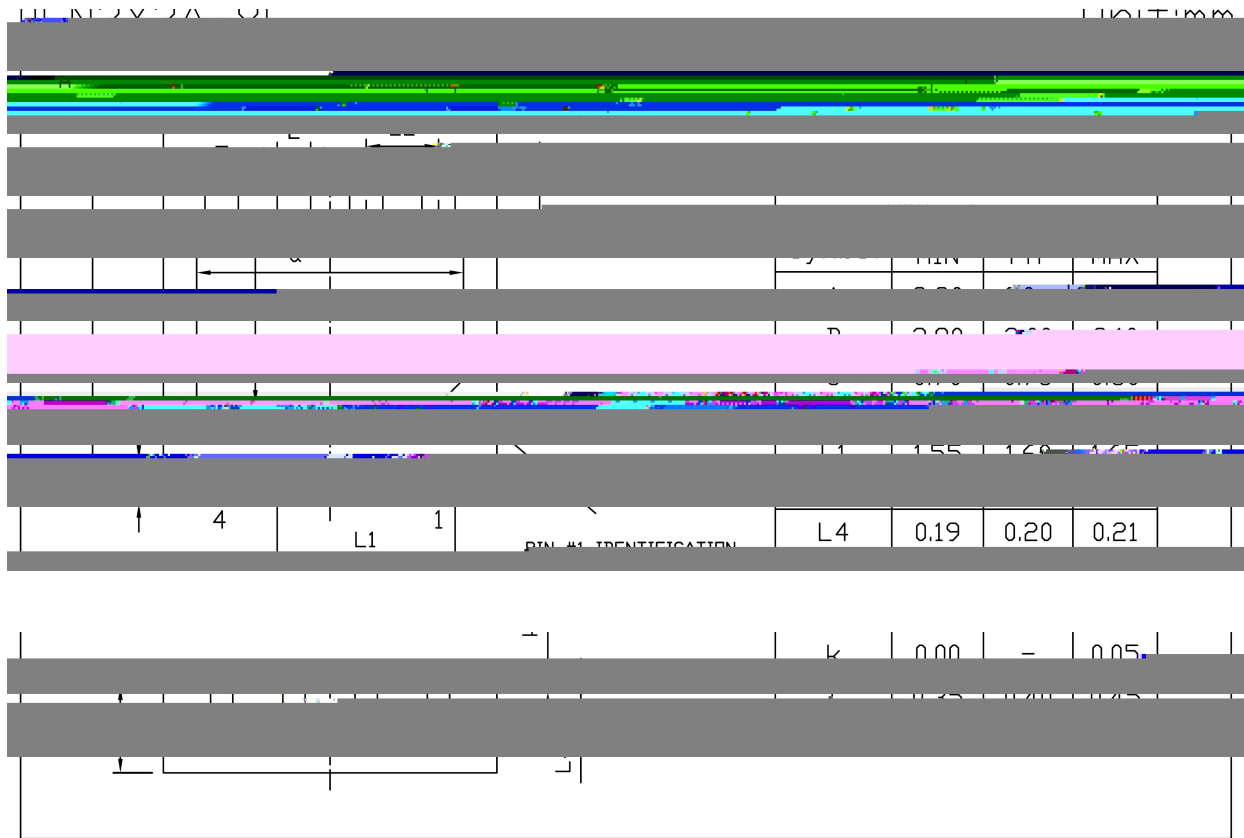

Rev.00 202004



/ Marking Instructions

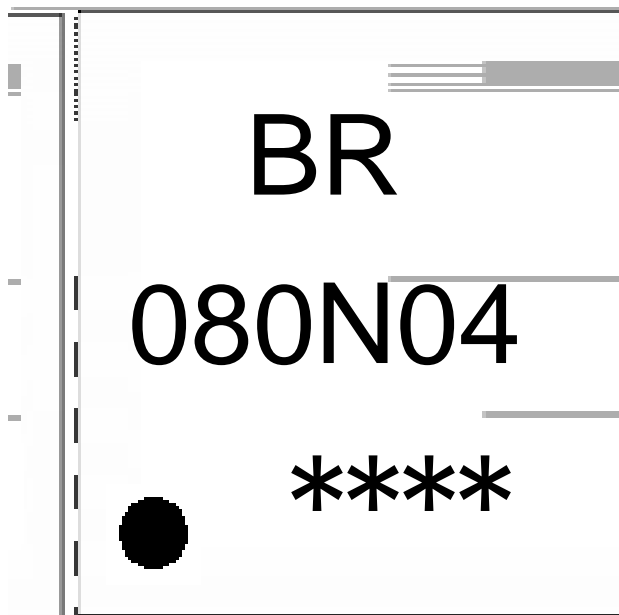

BR

080N04

Note:

BR: Company Code.

080N04: Product Type

****: Lot No. Code, code change with Lot No.



() /

Note:

- | | | | |
|---|---------|-----------|--|
| 1 | 150 180 | 60 90sec; | 1.Preheating:150~180°C, Time:60~90sec. |
| 2 | 245±5 | 5±0.5sec; | 2.Peak Temp.:245±5°C, Duration:5±0.5sec. |
| 3 | 2 | 10°C/sec. | 3. Cooling Speed: 2~10°C/sec. |

/ Resistance to Soldering Heat Test Conditions

260±5°C 10±1 sec. Temp.:260±5°C Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units	Dimension " " / (unitfi mm ³)
--------------	-------	---