


/ Descriptions

/ Features


±

/ Applications

/ Equivalent Circuit



/ Pinning

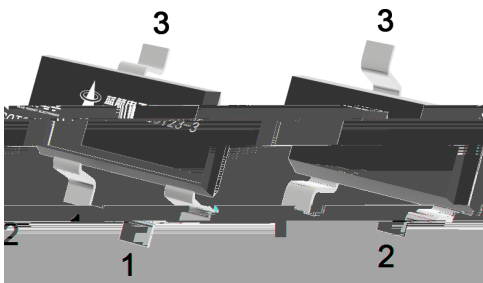

/ Marking

--	--

BRCS3415MC

		±	

/ Electrical Characteristic Curve

/ Electrical Characteristic Curve





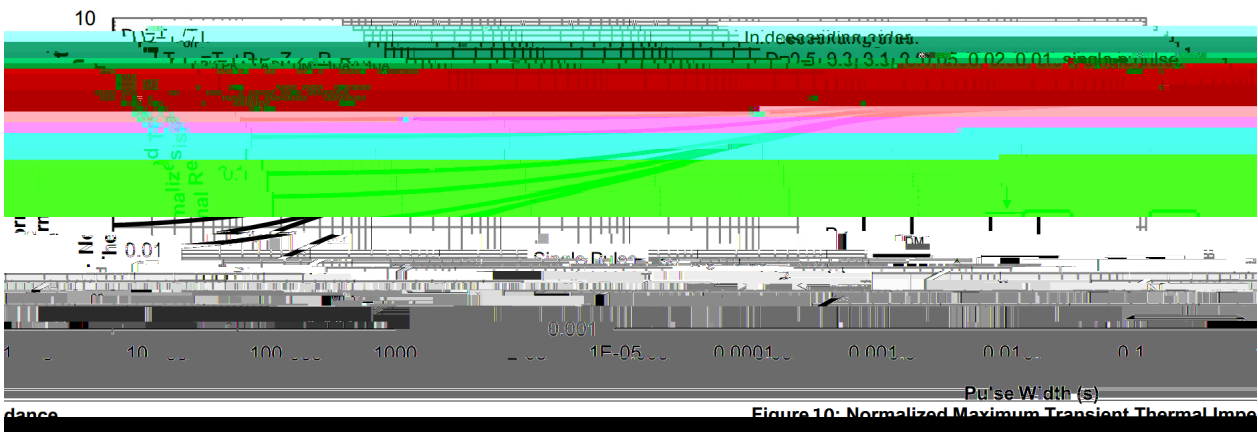


Figure 10: Normalized Maximum Transient Thermal Impedance

/ Package Dimensions

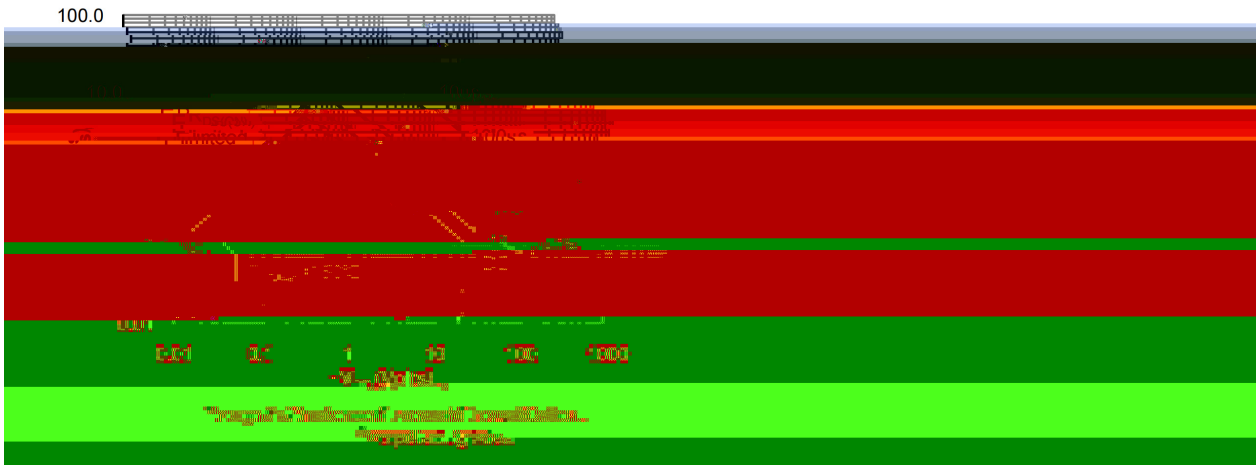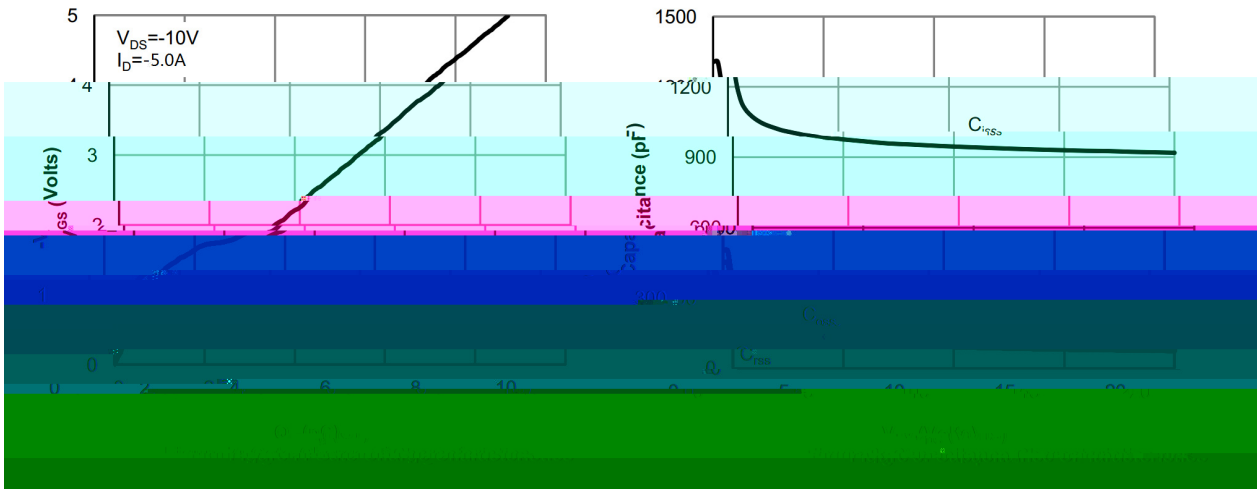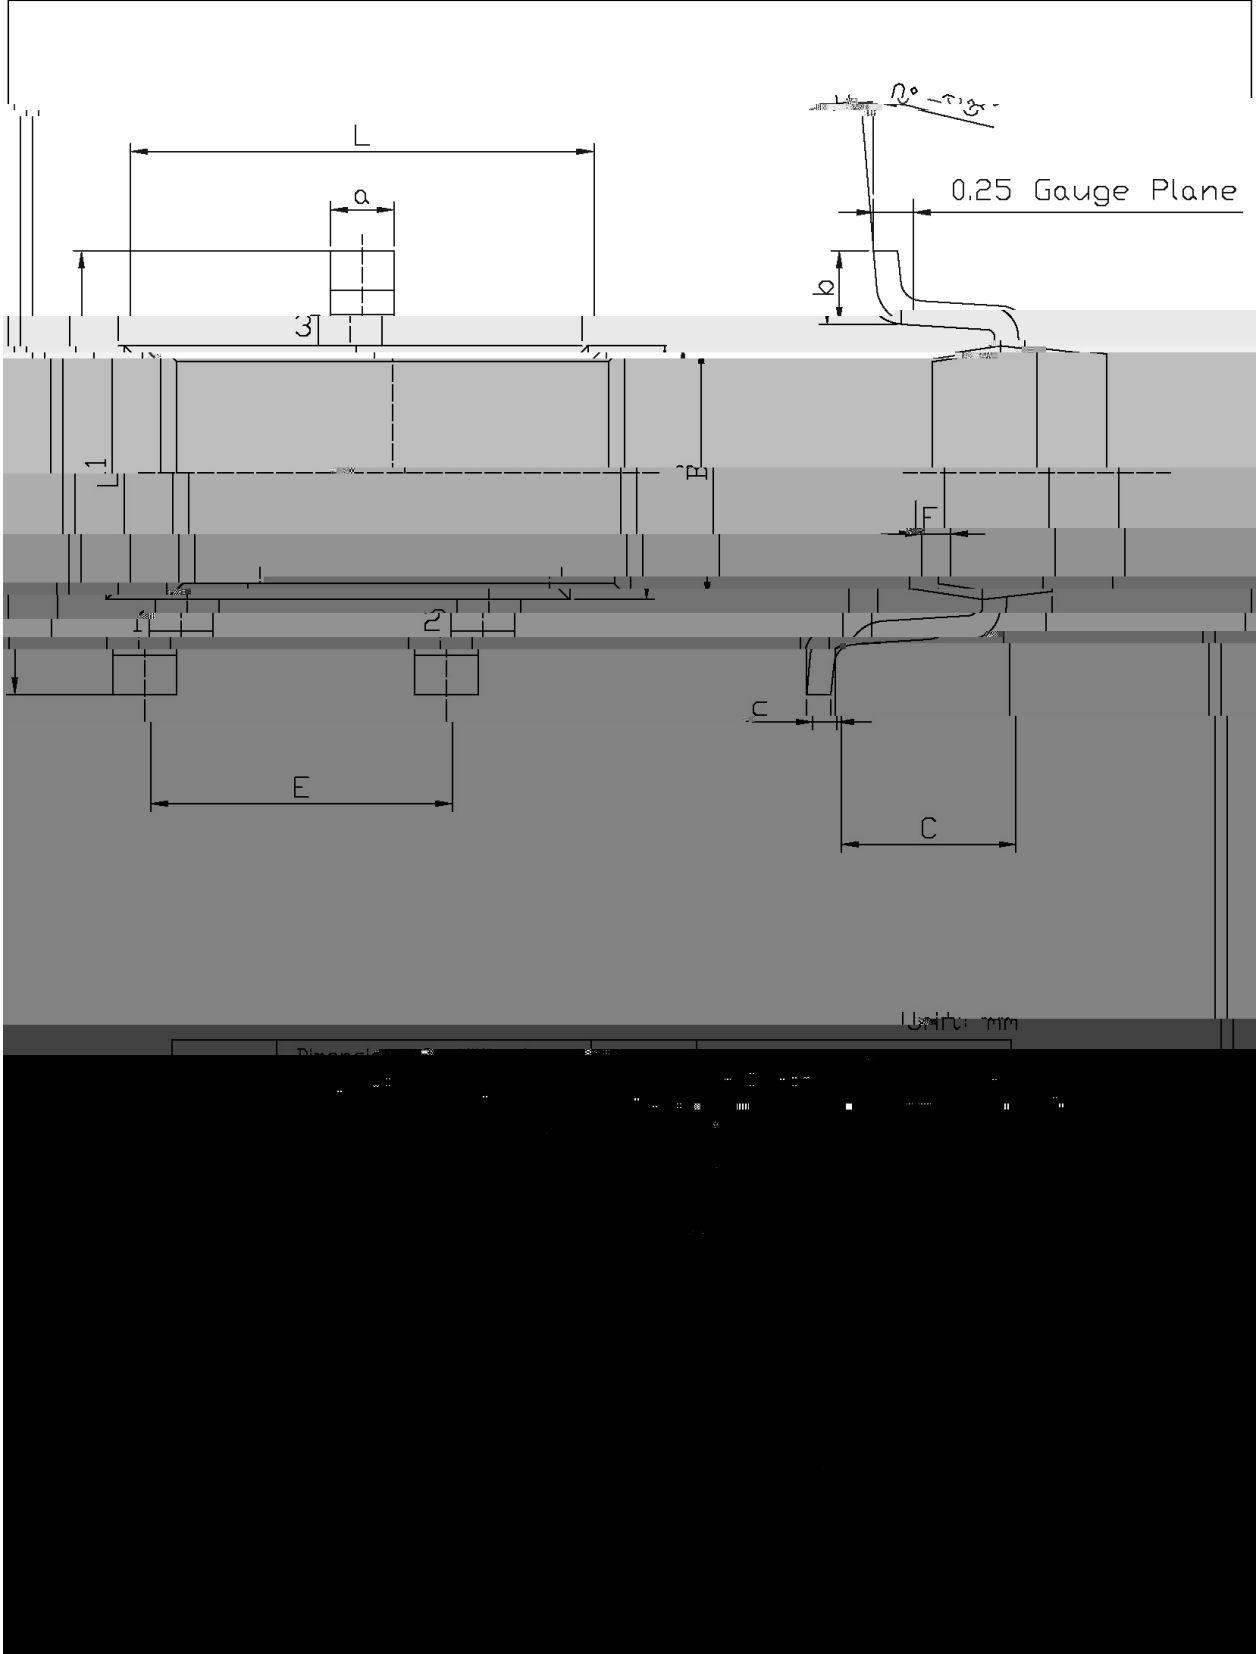

/ Marking Instructions

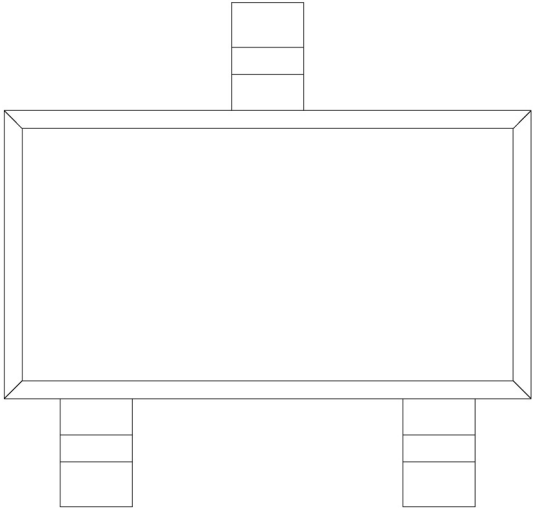

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.