
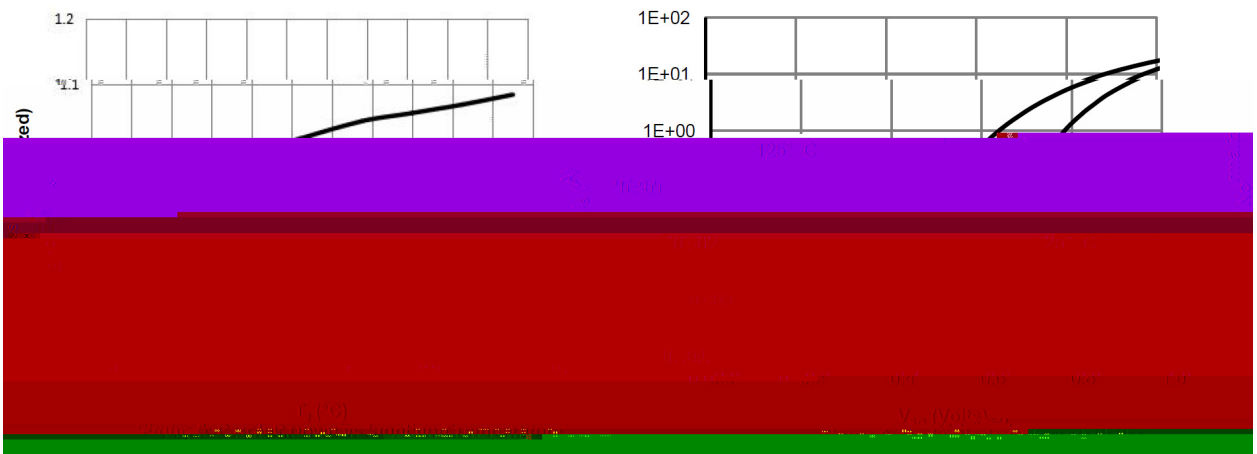
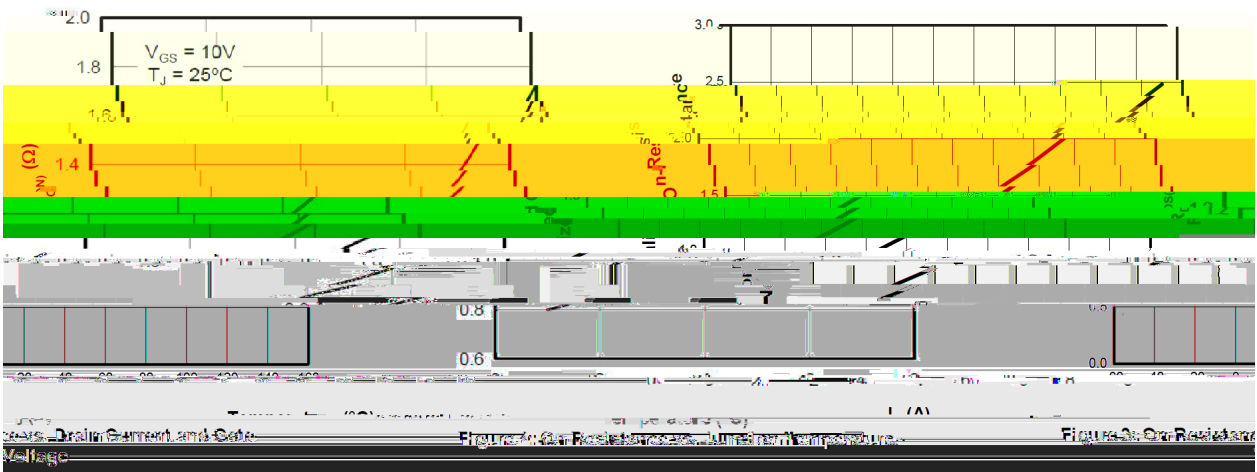





Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{bss}		

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Continuous Diode Forward Current	I_S				4	A
Total Gate Charge	Q_g	$V_{DS}=520V$ $I_D=2A$ $V_{GS}=10V$				


/ Electrical Characteristic Curve

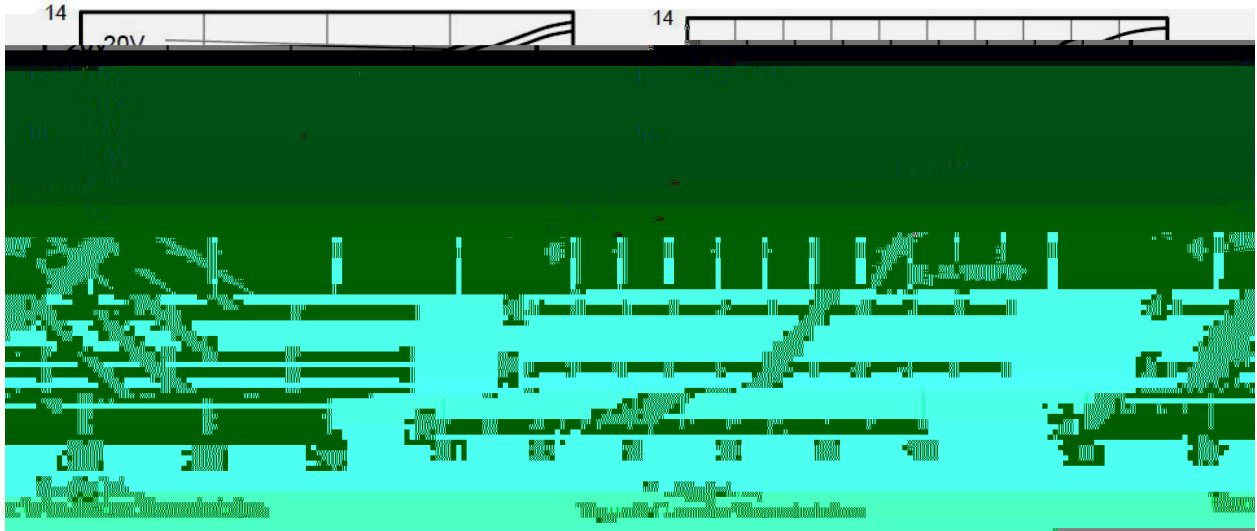

/ Electrical Characteristic Curve

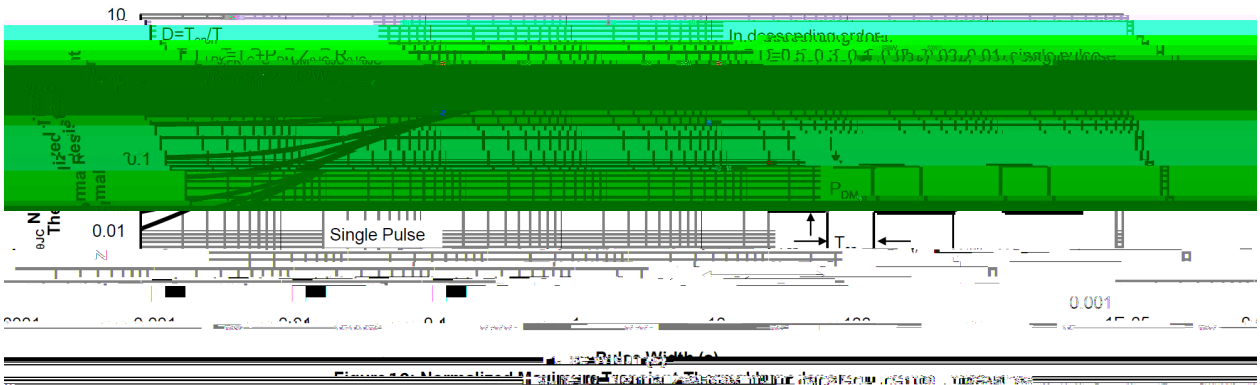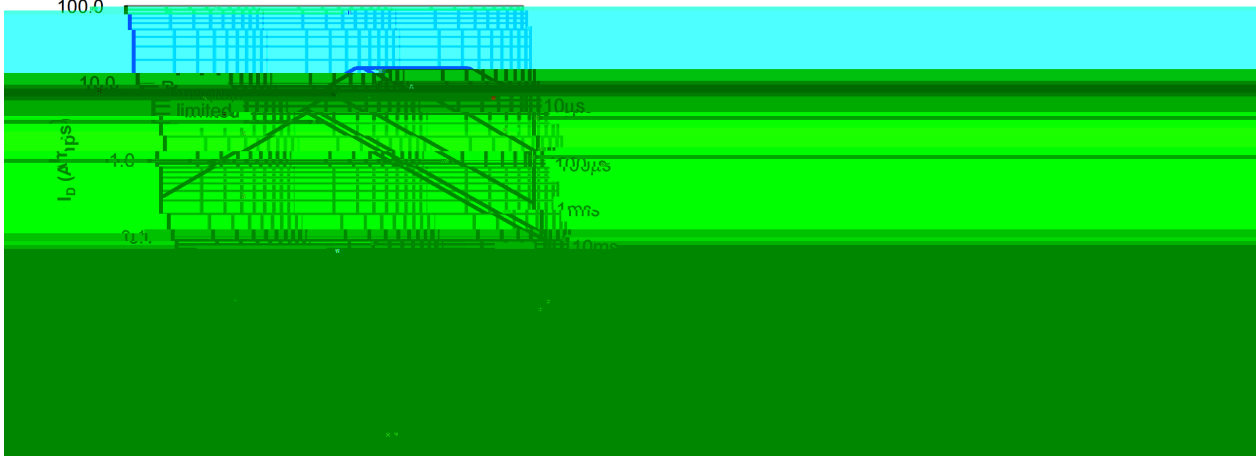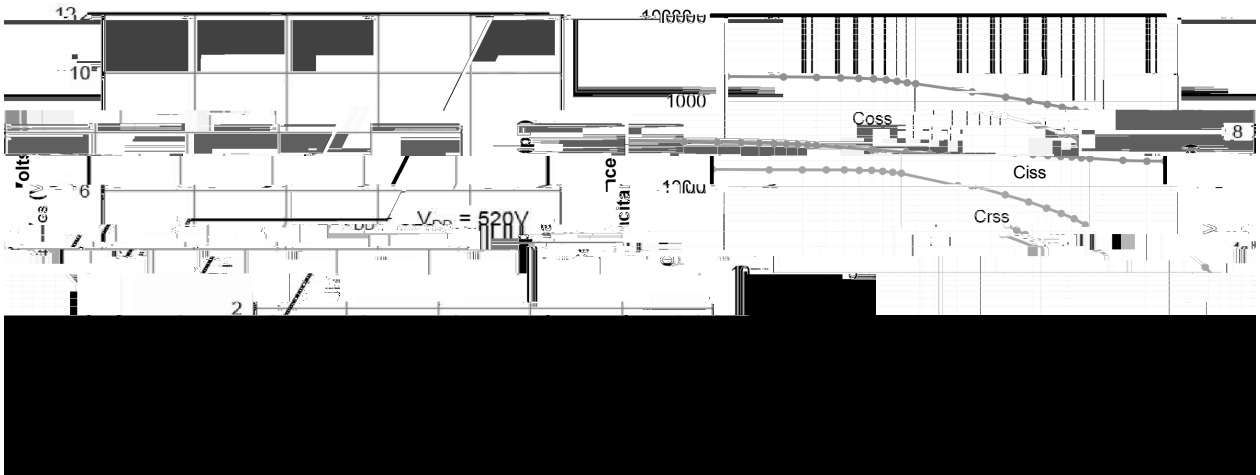

/ Package Dimensions

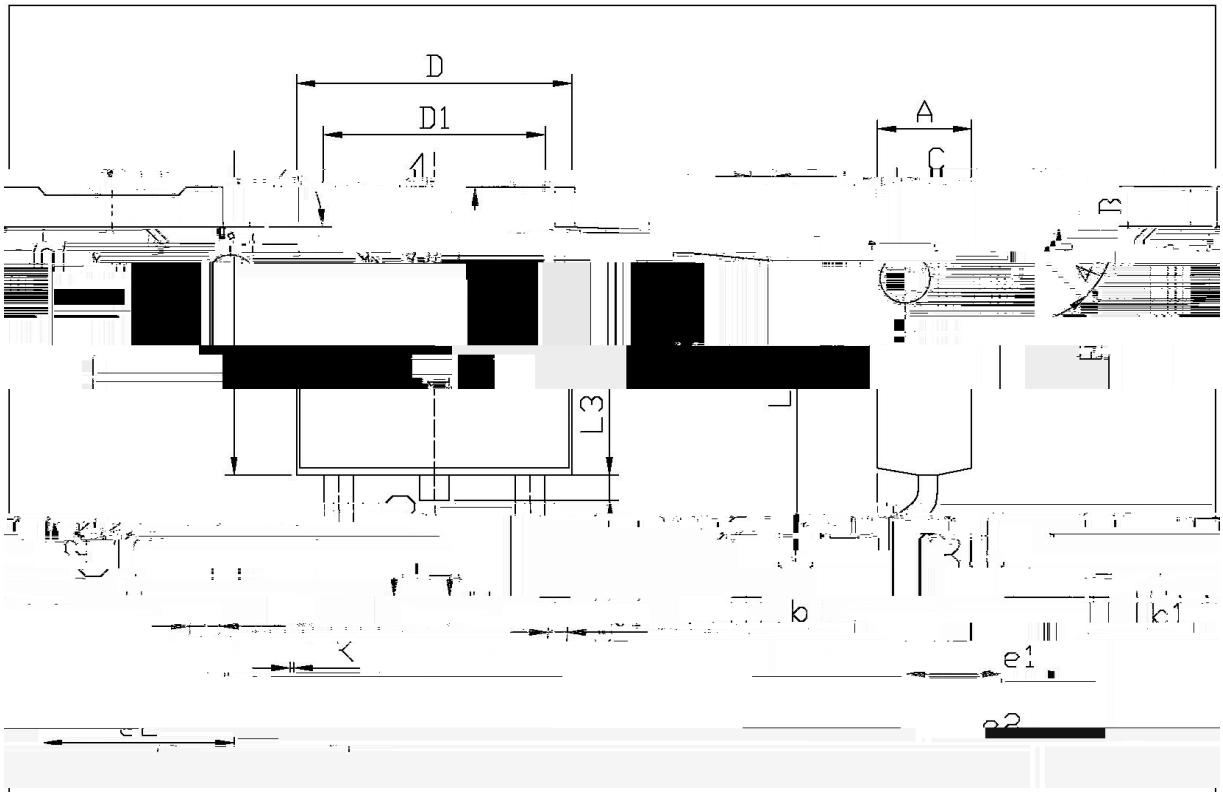


单位: mm

Dimensions		Millimeters		Dimensions		In Millimeters	
Min	Max	Symbol	Min	Max	Symbol	Min	Max
1.25		e1	2.24	2.34	B	0.95	
0.85		a	1.35			0.70	
0.45			0.55			0.55	
0.00	0.10		6.45	6.75		1.3	0.10
			D1	5.10		5.50	K

▷
—

T0-25

/ Marking Instructions

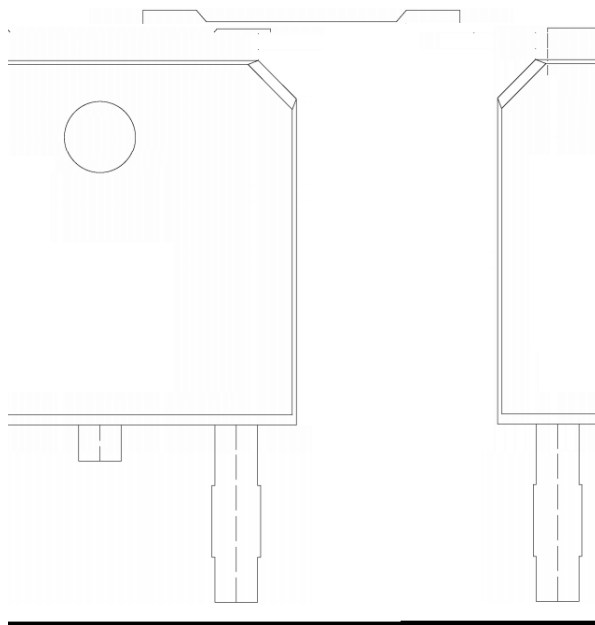

BR

-, I (B)K

!!!!

Note:

BR: Company Code

65R1K2T: Product Type Code

