

# BRDTC144EUAQ

Rev.A Apr.-2023

SOT-323


NPN

Silicon NPN Digital Transistor in a SOT-323 Plastic Package.

With built-in bias resistors, simplify circuit design, reduce a quantity of parts and manufacturing process, Qualified to AEC-Q101 Standards for High Reliability, HF Product.

Switching, Inverter circuit, Interface circuit and driver circuit applications, Meet the stringent requirements of automotive applications.

## / Equivalent Circuit

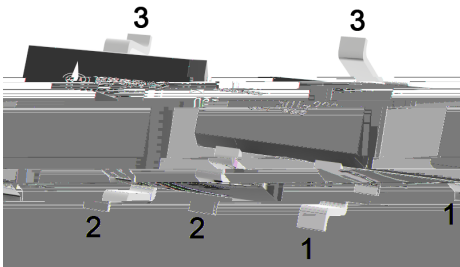

PIN1 Base    PIN 2 Emitter    PIN 3 Collector

## / h



**/ Absolute Maximum Ratings(Ta=25 )**

| Parameter                   | Symbol           | Rating  | Unit |
|-----------------------------|------------------|---------|------|
| Output Voltage              | V <sub>CC</sub>  | 50      | V    |
| Input Voltage               | V <sub>IN</sub>  | 40      | V    |
|                             |                  | -10     | V    |
| Output Current              | I <sub>C</sub>   | 100     | mA   |
|                             | I <sub>O</sub>   | 30      | mA   |
| Collector Power Dissipation | P <sub>C</sub>   | 200     | mW   |
| Junction Temperature        | T <sub>j</sub>   | 150     |      |
| Storage Temperature Range   | T <sub>stg</sub> | -55 150 |      |

**/ Electrical Characteristics(Ta=25 )**

| Parameter              | Symbol                         | Test Conditions   | Min  | Typ | Max  | Unit |
|------------------------|--------------------------------|---|------|-----|------|------|
| Input Voltage          | V <sub>I(off)</sub>            | V <sub>CC</sub> =5.0V I <sub>O</sub> =100μA             |      |     | 0.5  | V    |
|                        | V <sub>I(on)</sub>             | V <sub>O</sub> =0.3V I <sub>O</sub> =2.0mA              | 3.0  |     |      | V    |
| Output Voltage         | V <sub>O(on)</sub>             | I <sub>O</sub> =10 mA I <sub>I</sub> =0.5mA             |      |     | 0.3  | V    |
| Input Current          | I <sub>I</sub>                 | V <sub>I</sub> =5.0V                                    |      |     | 0.18 | mA   |
| Output Cut-off Current | I <sub>O(off)</sub>            | V <sub>CC</sub> =50V V <sub>I</sub> =0V                 |      |     | 0.5  | μA   |
| DC Current Gain        | G <sub>I</sub>                 | V <sub>O</sub> =5.0V I <sub>O</sub> =5.0mA              | 68   |     |      |      |
| Transition Frequency   | f <sub>T</sub>                 | V <sub>CE</sub> =10V I <sub>E</sub> =-5.0mA<br>f=100MHz |      | 250 |      | MHz  |
| Resistance1            | R <sub>1</sub>                 |   | 32.9 | 47  | 61.1 | K    |
| Resistance Ratio       | R <sub>2</sub> /R <sub>1</sub> |   | 0.8  | 1.0 | 1.2  |      |


**/ Electrical Characteristic Curve**

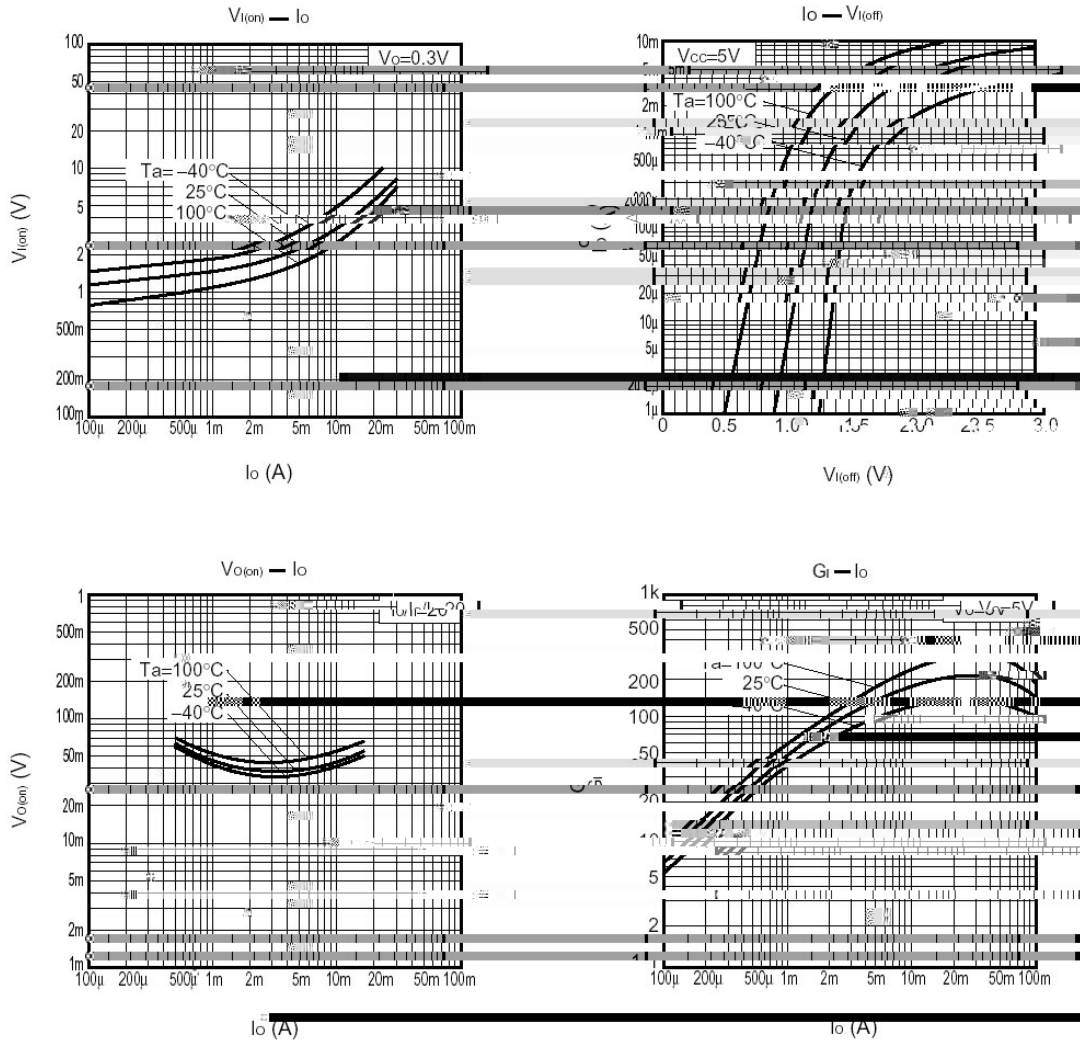





/ Marking Instructions

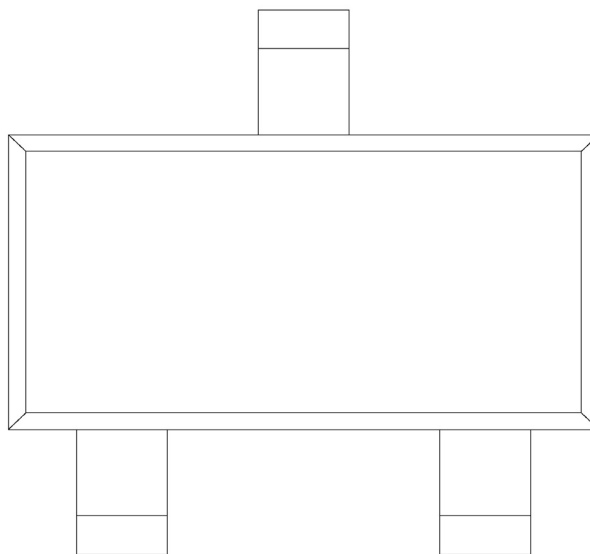


26

Note:

Q: Automobile halogen-free product Code

26 Product Type Code

**( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)**

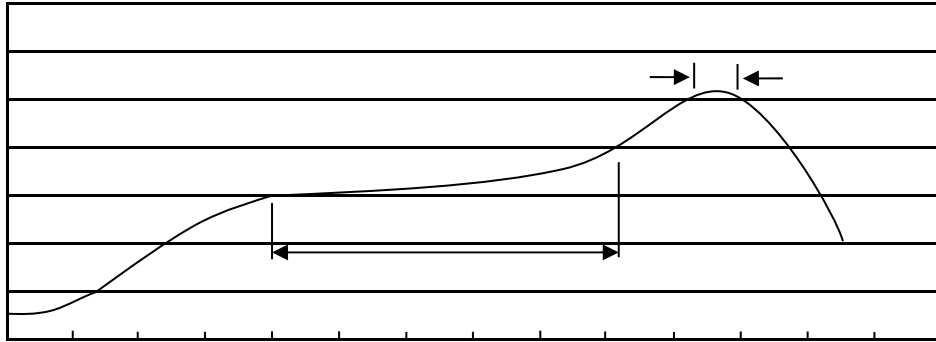

Note:

- 1      150 200      60 120sec;      1.Preheating:150~200 , Time:60~120sec.
- 2      255 5      5 0.5sec;      2.Peak Temp.:255 5 , Duration:5 0.5sec.
- 3      2 10 /sec.      3. Cooling Speed: 2~10 /sec.

**/ Resistance to Soldering Heat Test Conditions**

260 5      10 1 sec.      Temp:260±5      Time:10±1 sec

**/ Packaging SPEC.**

/ REEL

| Package Type | Units |    |        |   |         | Dimension (unit mm <sup>3</sup> ) |             |             |
|--------------|-------|----|--------|---|---------|-----------------------------------|-------------|-------------|
|              |       |    |        |   |         |                                   |             |             |
| SOT-323      | 3,000 | 10 | 30,000 | 6 | 180,000 | 7 x8                              | 180x120x180 | 390x385x205 |

**/ Notices**