




Rev.F Nov.-2022

TO-220FL

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DSS}	600	V
Drain Current	$I_D(T_C=25^\circ\text{C})$	9.5	A
Drain Current	$I_D(T_C=100^\circ\text{C})$	5.7	A
Drain Current - Pulsed	I_{DM}	38	A
Gate-Source Voltage	V_{GSS}	± 30	V
Single Pulsed Avalanche Energy	E_{AS}	700	mJ
Repetitive Avalanche Energy	E_{AR}	15.6	mJ
Avalanche Current	I_{AR}	9.5	A
Thermal Resistance, Junction to Case	R_{JC}	2.5	/W
Thermal Resistance, Junction to Ambient	R_{JA}	62.5	/W
Power Dissipation	$P_D(T_C=25^\circ\text{C})$	50	W
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to 150	

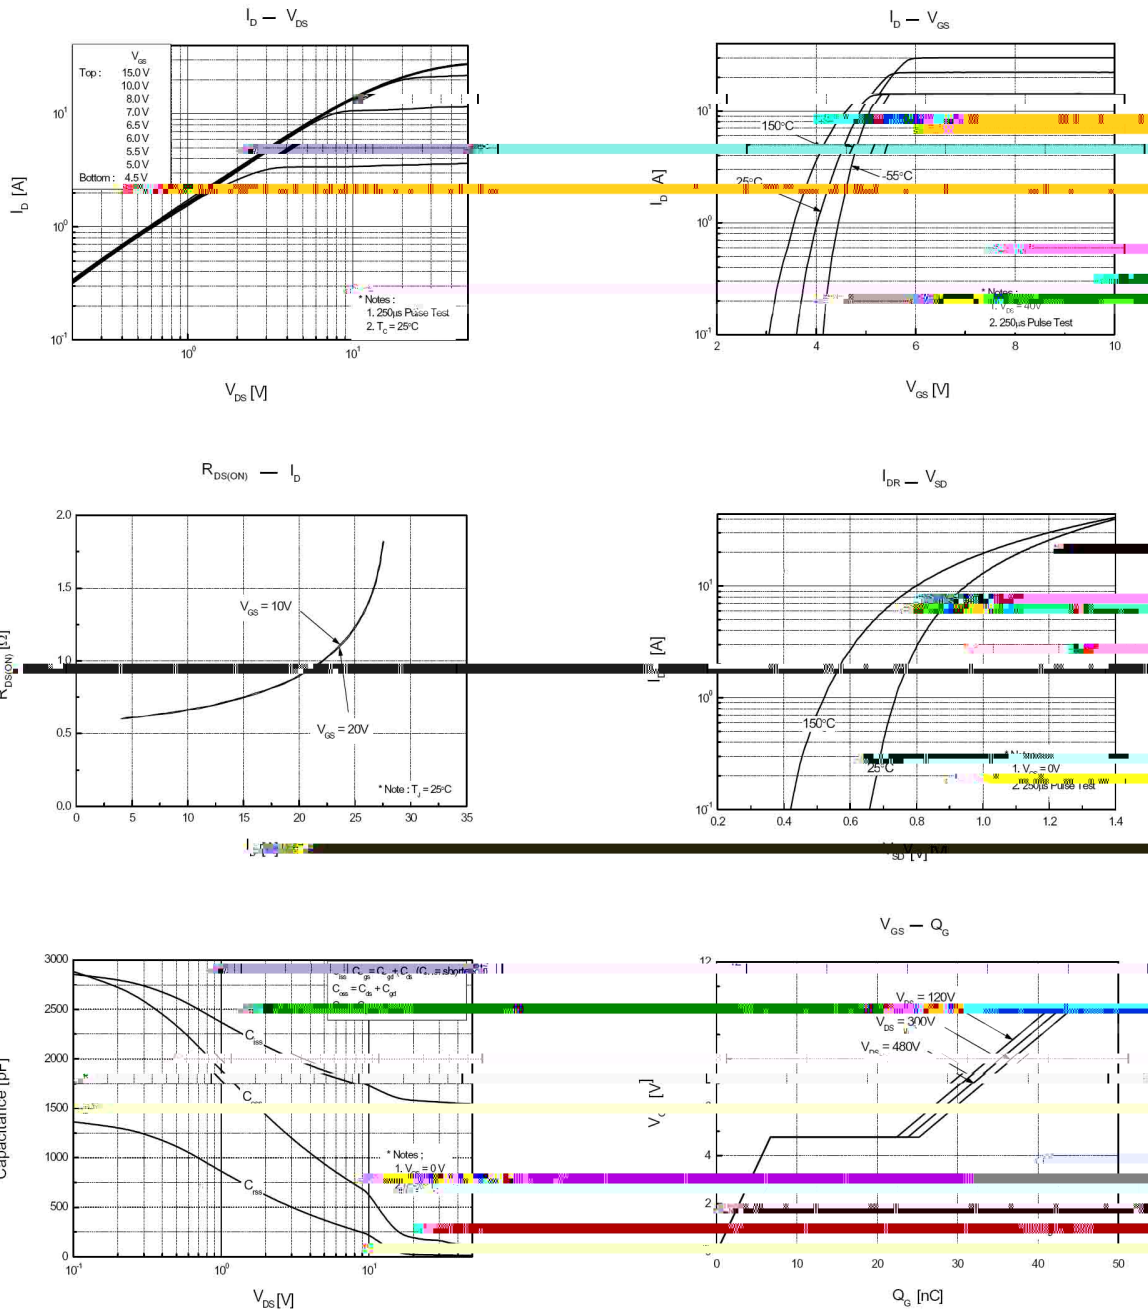

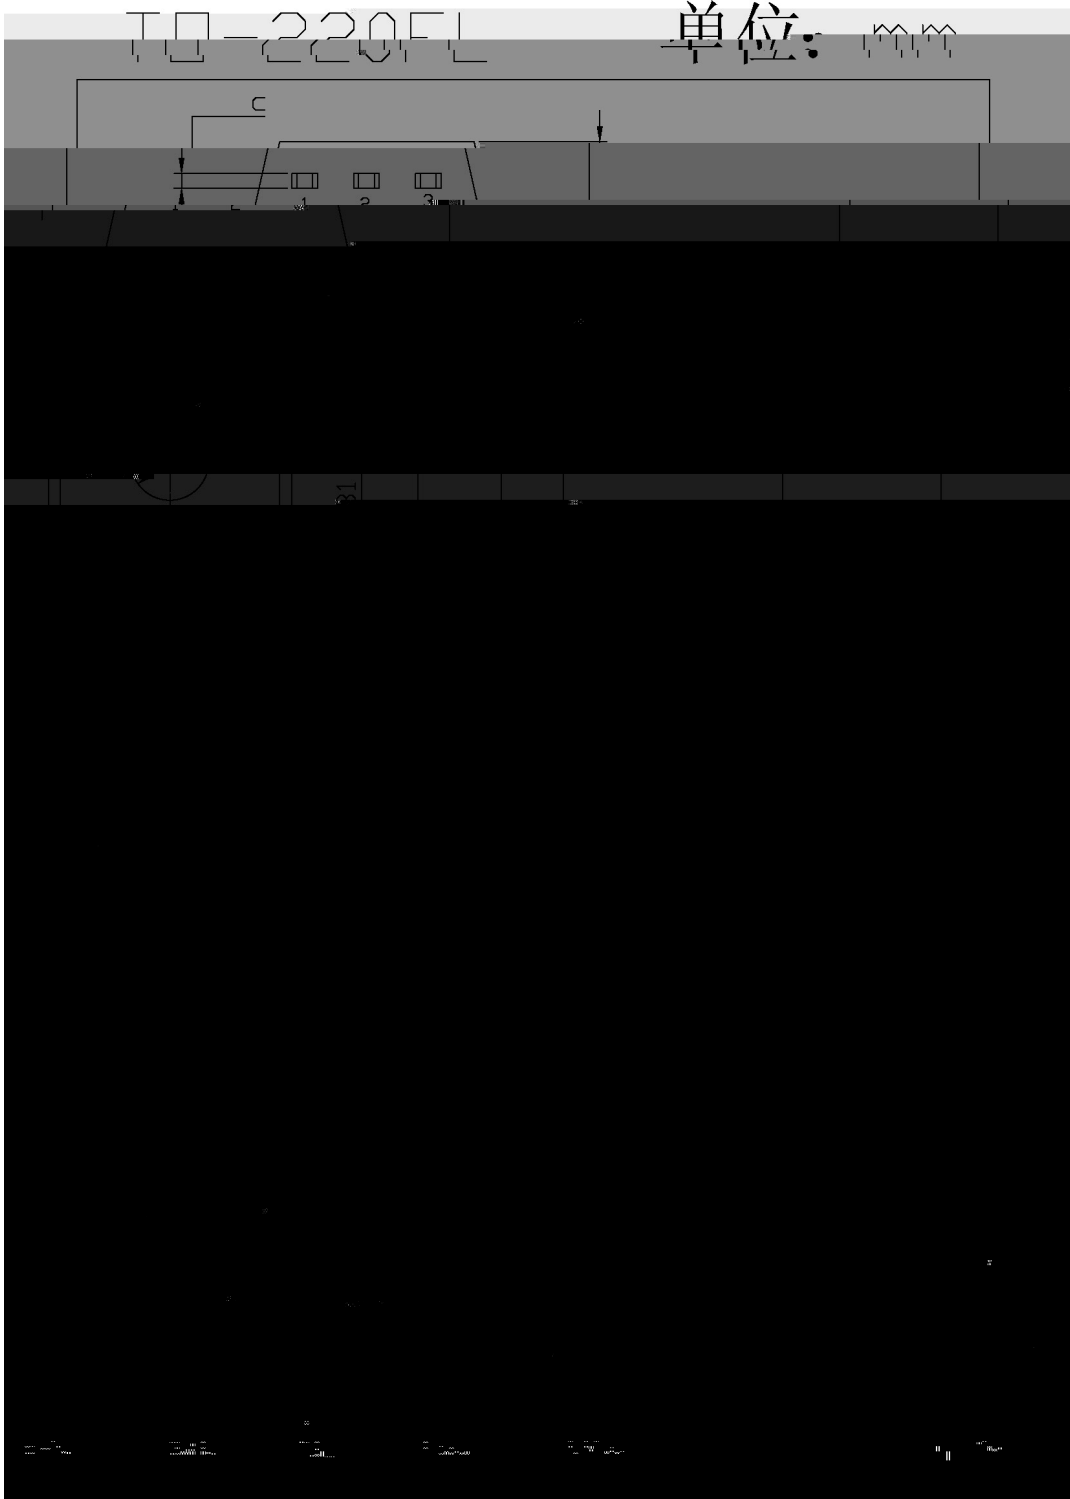

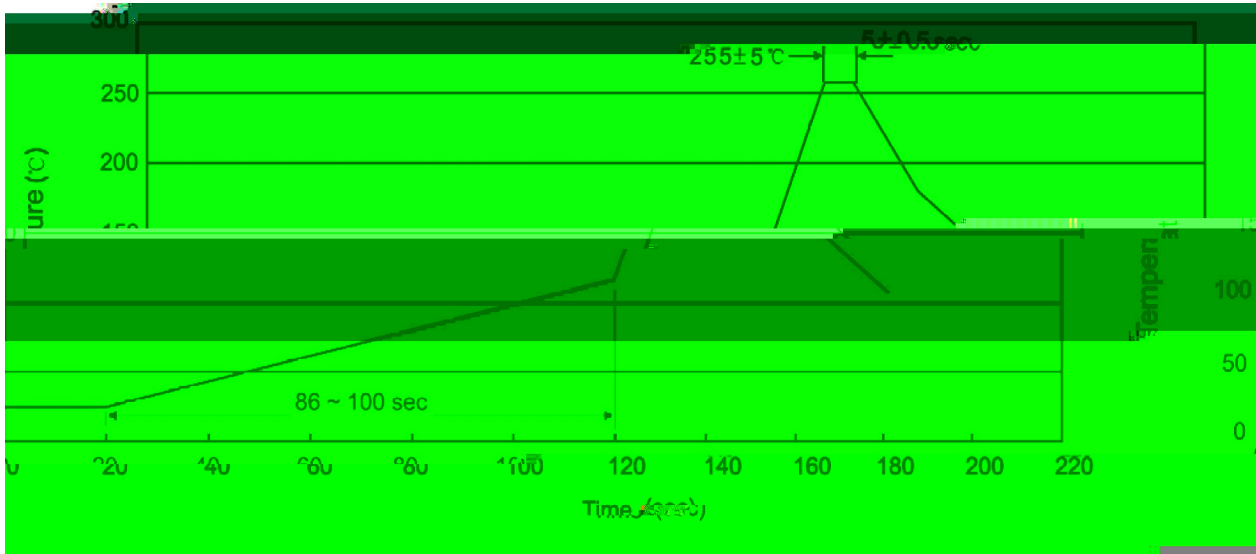
Note:

- 1 25 150 60 90sec;
- 2 255 5 5 0.5sec;
- 3 2 10 /sec.

- 1.Preheating:25~150 , Time:60~90sec.
- 2.Peak Temp.:255 5 , Duration:5 0.5sec.
3. Cooling Speed: 2~10 /sec.

270 5

10 1 sec.

Temp.:270±5

Time:10±1 sec

/ TUBE

Package Type	Units	Dimension	(unit mm ³)
--------------	-------	-----------	-------------------------