


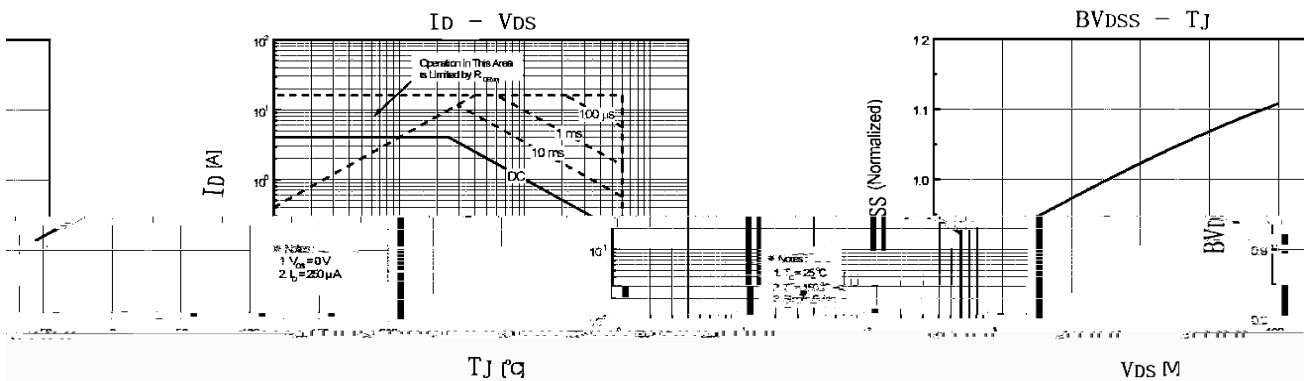
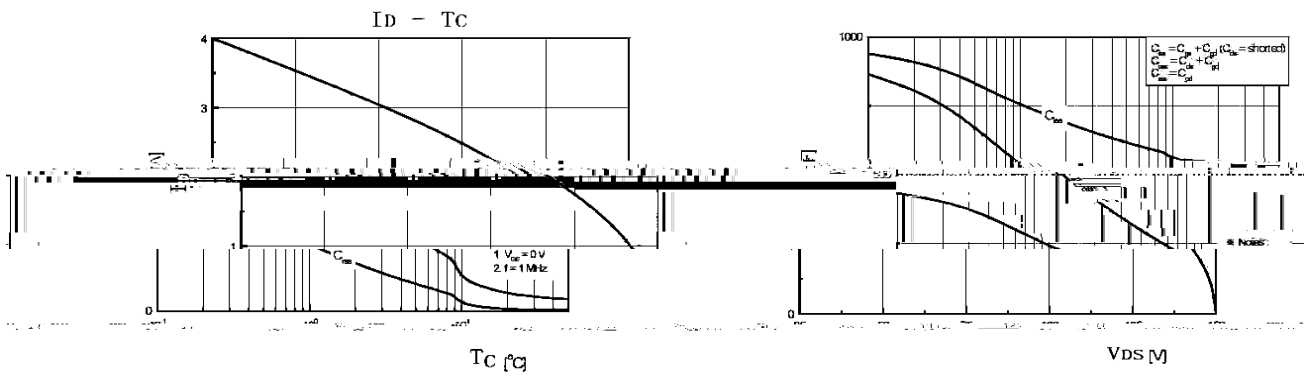


**BRI4N65**  
Rev.E Aug.-2017


TO-251          N

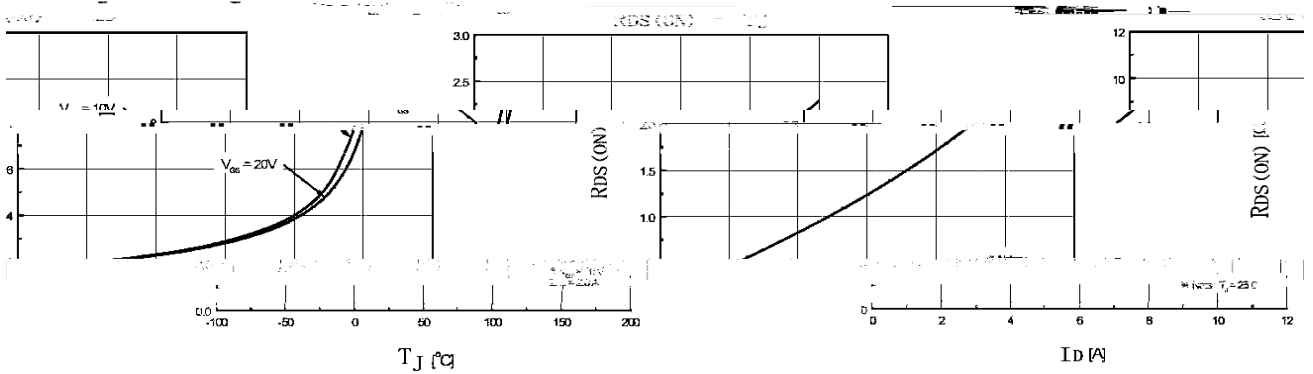

**/ Electrical Characteristic Curve**

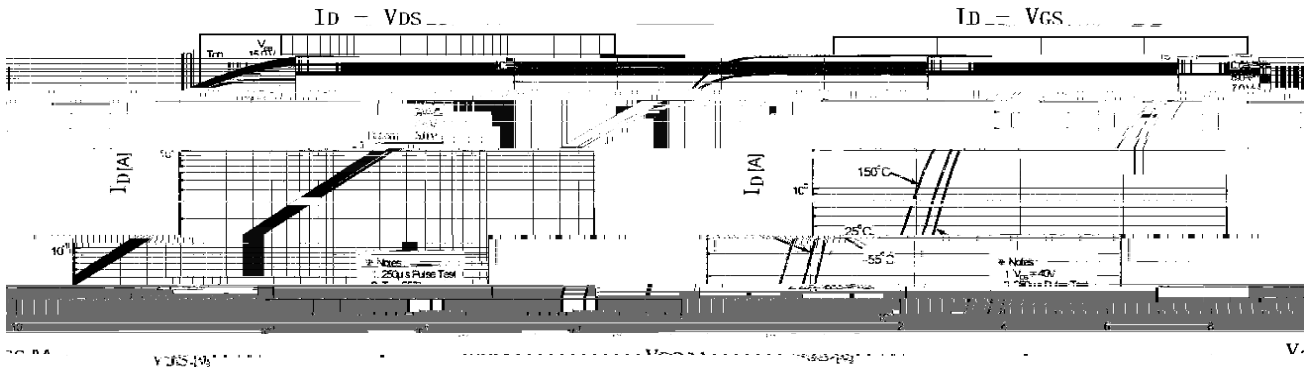


**/ Package Dimensions**

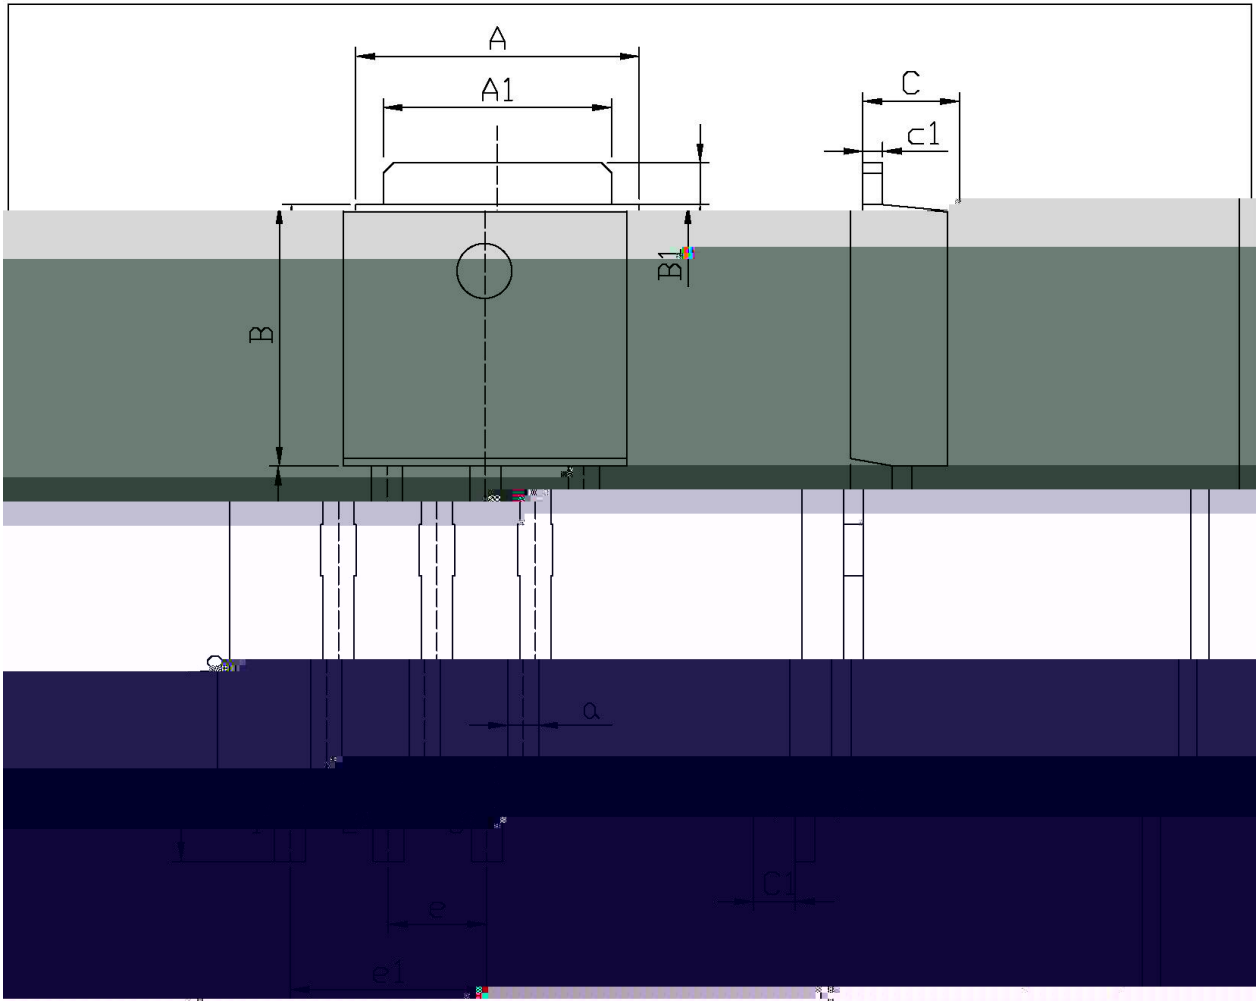

单位: mm

Dimensions In Millimeters		Symbol	Dimension In Millimeters		Symbol
Min	Max		Min	Max	
6.45	6.75	a	0.50	0.70	A
5.10	5.50	b	9.00	9.40	A1
0.95	1.25	c	0.45	0.55	B
		c1			B1
2.20	2.40	e	2.00	2.20	C

**/ Marking Instructions**

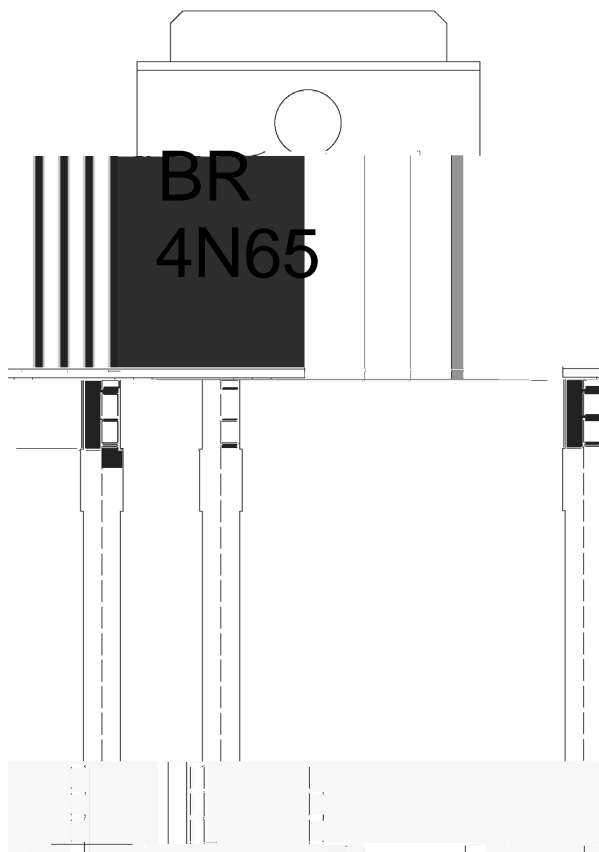

BR

+E - ,

!!!!


Note:

BR: Company Code

4N65: Product Type.

\*\*\*\*: Lot No. Code, code change with Lot No.

( ) / Temperature Profile for Dip Soldering(Pb-Free)

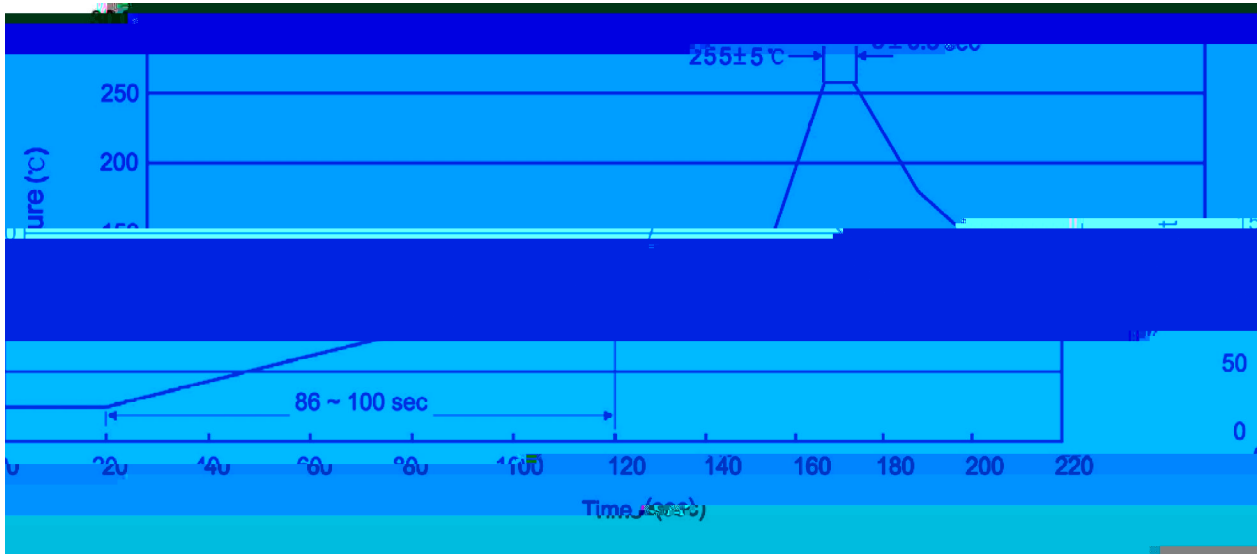

Note:

- |   |        |     |            |        |   |
|---|--------|-----|------------|--------|---|
| 1 | 25     | 150 | 60         | 90sec; | 1.Preheating:25~150 , Time:60~90sec.      |
| 2 | 255..5 |     | 5..0.5sec; |        | 2.Peak Temp.:255..5 , Duration:5..0.5sec. |
| 3 |        | 2   | 10         | /sec.  | 3. Cooling Speed: 2~10 /sec.              |

/ Resistance to Soldering Heat Test Conditions

270..5                      10..1 sec.                      Temp.:270±5                      Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units				Dimension (unit mm <sup>3</sup> )		

/ TUBE

Package Type                      Units                      Dimension                      (unit