



BRI5N60

/ Package Dimensions

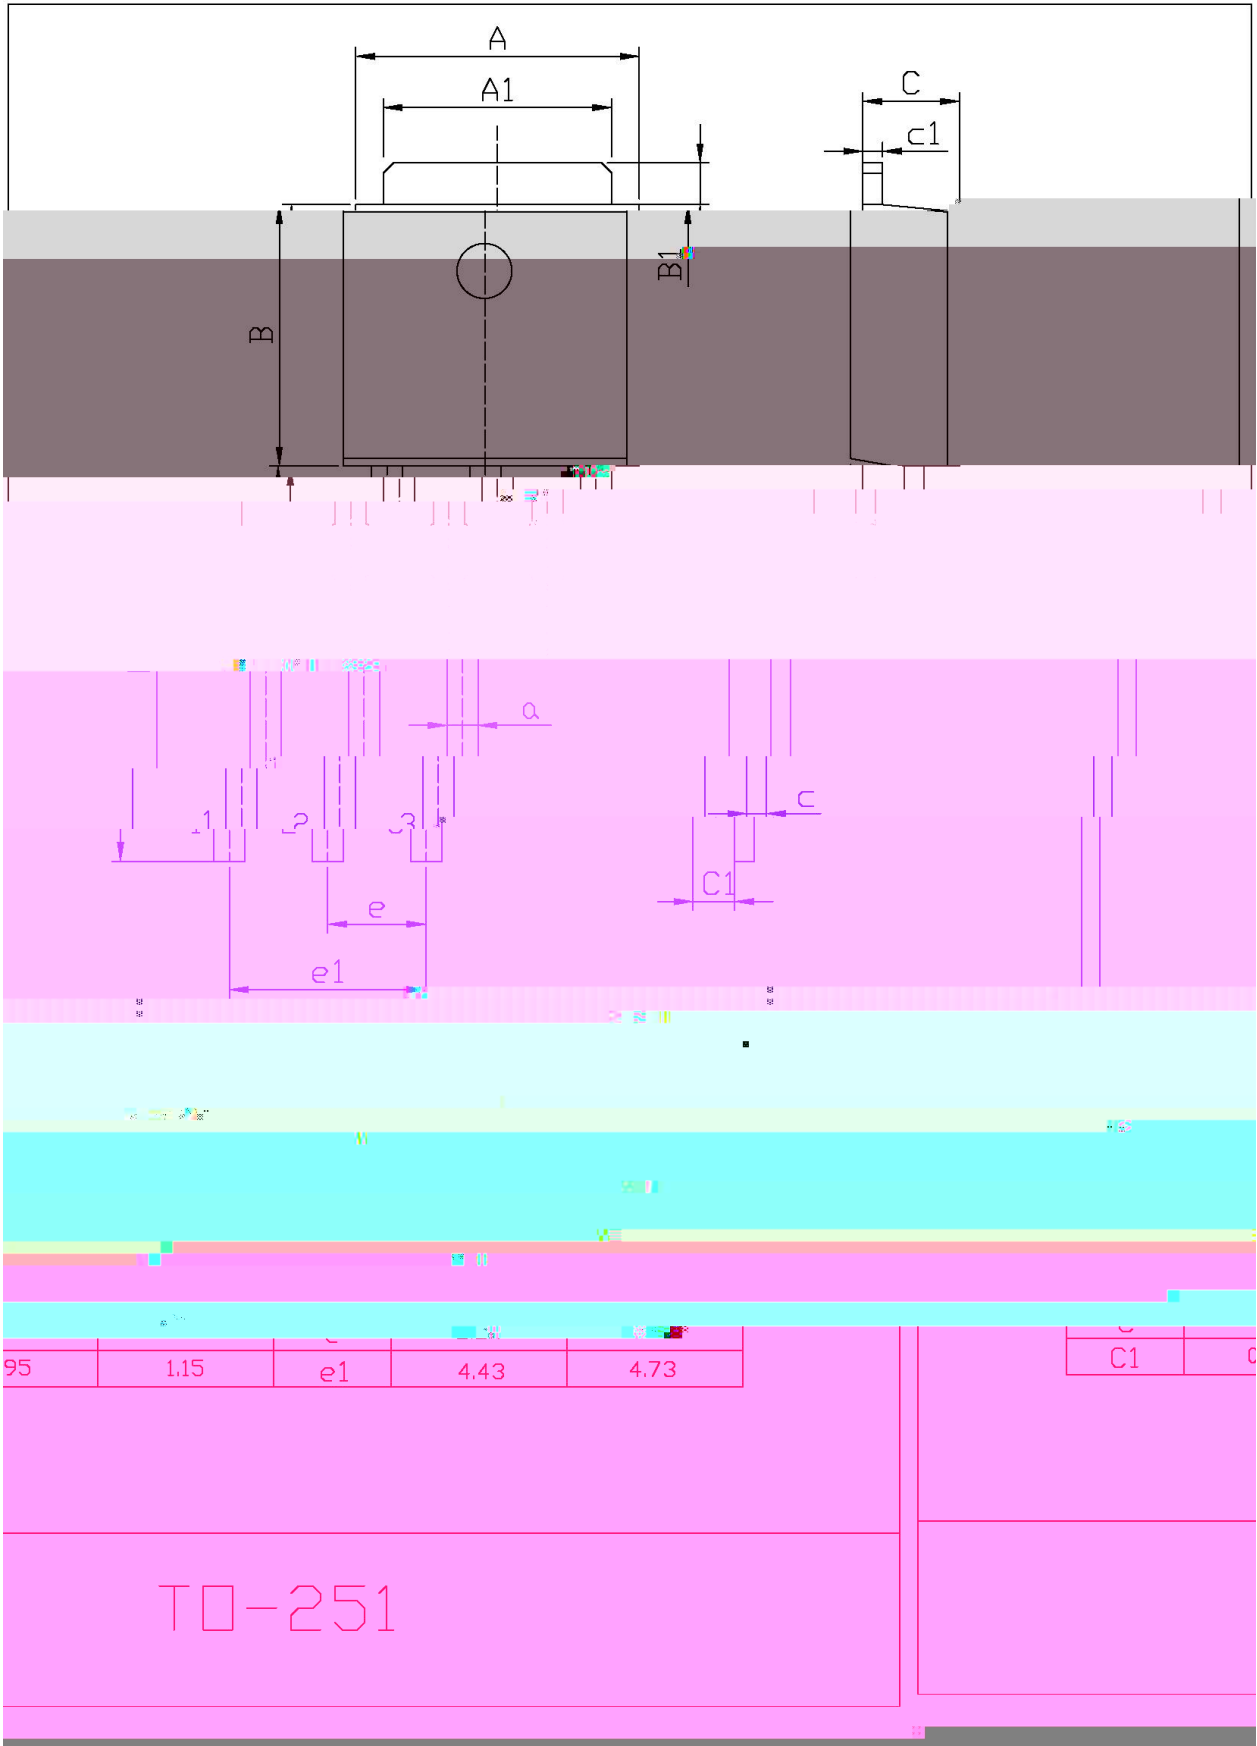

/ Marking Instructions

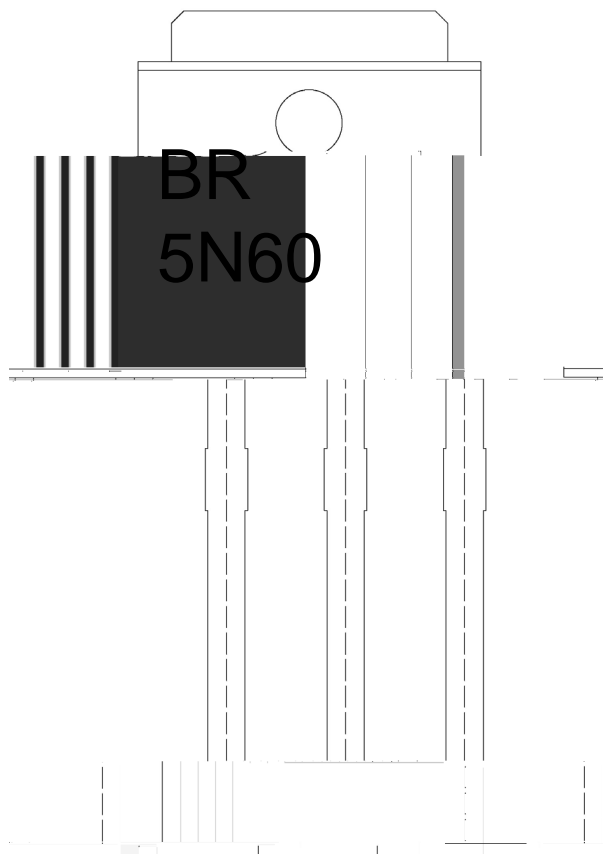

BR

5N60


Note:

BR: Company Code

5N60: Product Type.

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

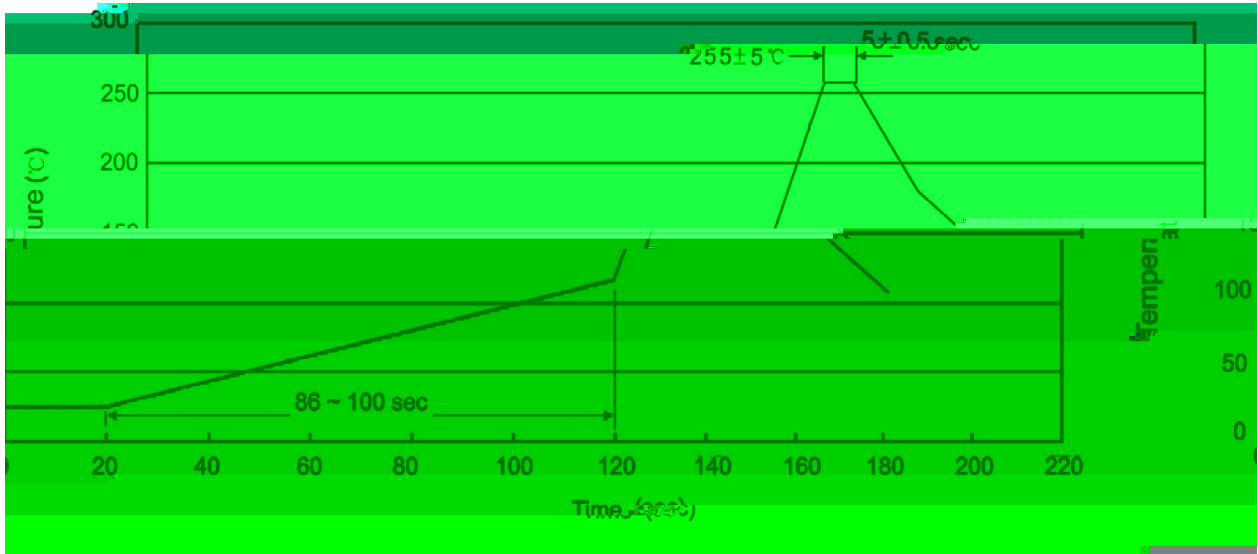

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|--|
| 1 | 25 | 150 | 60 | 90sec; | 1. Preheating: 25~150 , Time: 60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | | 2. Peak Temp.: 255±5 , Duration: 5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

270±5 10±1 sec. Temp.: 270±5 Time: 10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units				Dimension			(unit mm ³)

/ TUBE

Package Type	Units				Dimension			(unit mm ³)