



BRI740
Rev.A Sep.-2023

TO-251 N

/ Package Dimensions

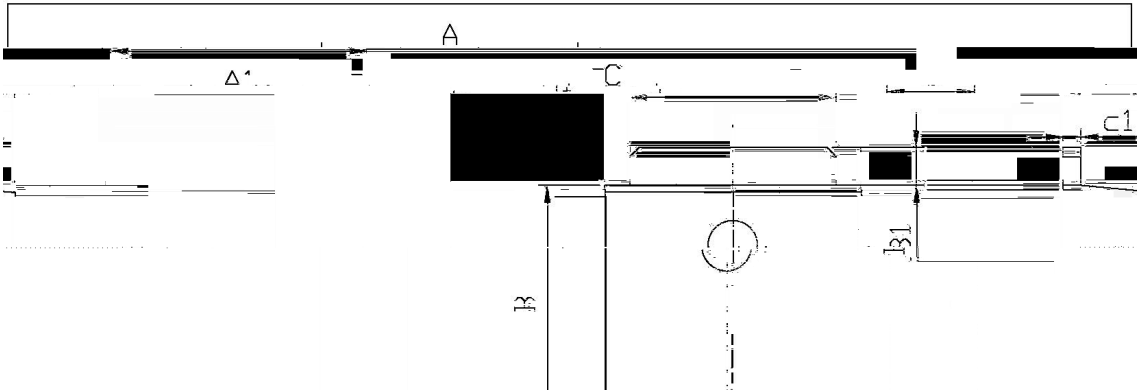


单位: mm

Symbol	Min	Max	Symbol	Min	Max
A1	5.70	5.50	b1	9.00	9.40
0.45	0.55		0.45	0.55	
R1	0.95	1.25	c1	0.45	0.55



TO-251

/ Marking Instructions

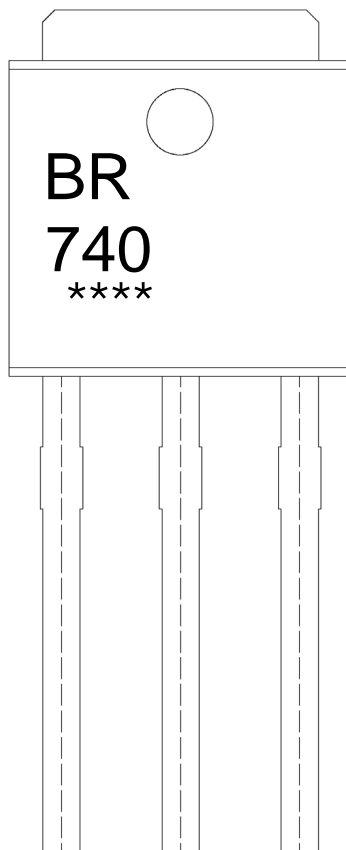

BR

740


Note:

BR: Company Code

740: Product Type Code

****: Lot No. Code, code change with Lot No

() / Temperature Profile for Dip Soldering(Pb-Free)

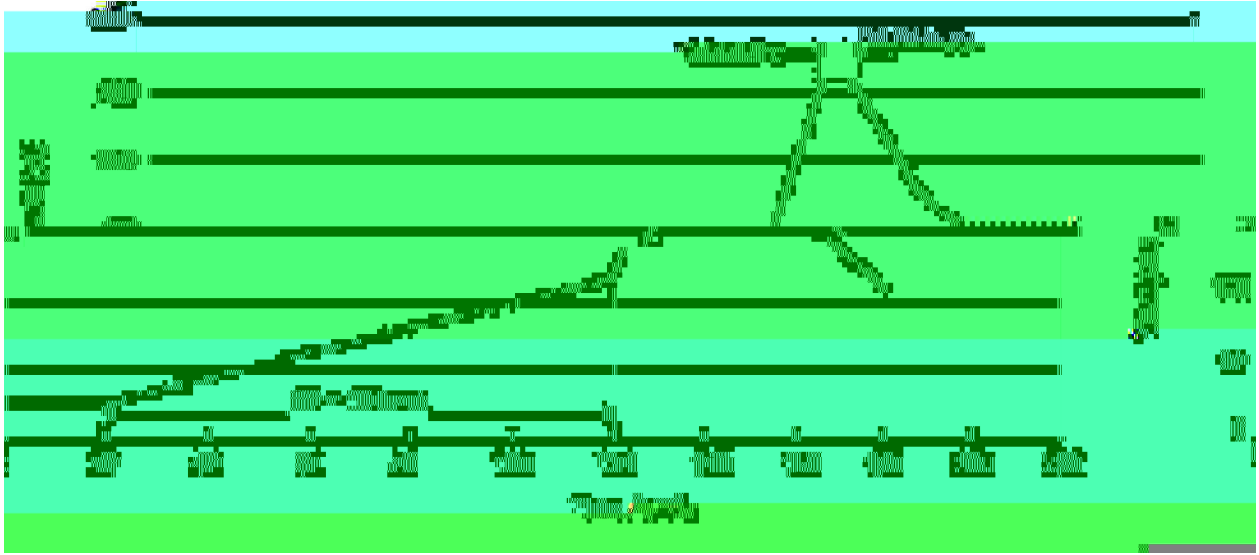

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | | 2.Peak Temp.:255±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

270±5 10±1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units					Dimension (unit mm ³)		
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box