

BRLV25T50BD

/ Descriptions

TO-263

/ Features

/ Applications

OR-ing

DC-DC




/ h_{FE} Classifications & Marking

BRLV25T50BD

--	--	--	--

/ Package Dimensions

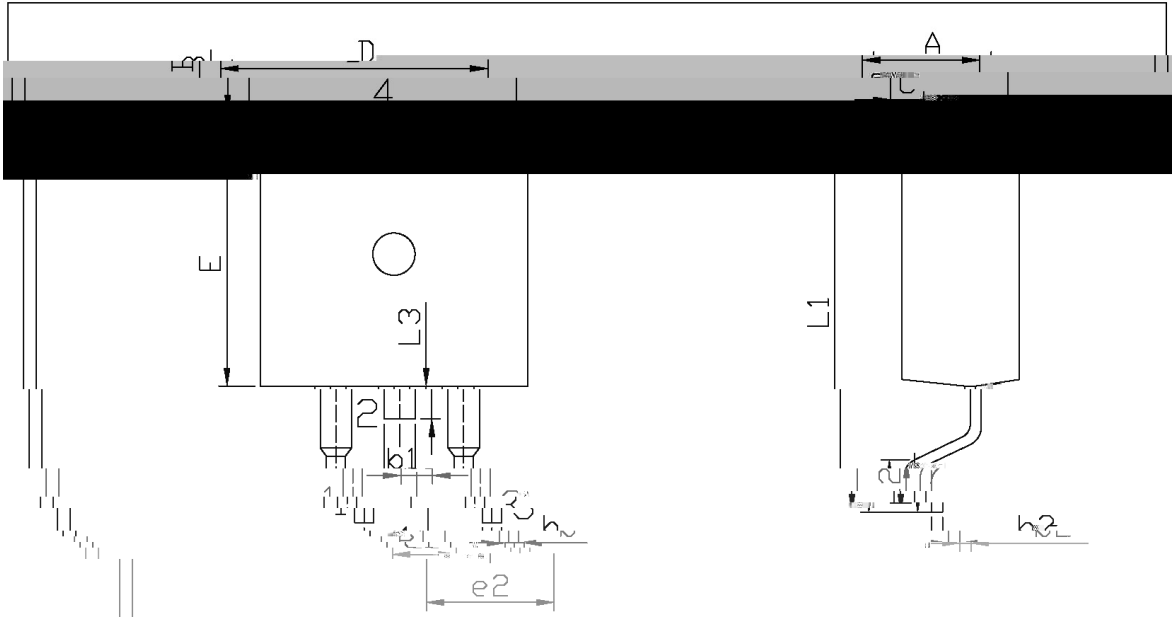

单位: mm

Dimensions in Millimeters

Max	Min	Max	Min
9.40	4.30	4.70	9.00
2.74	1.00	1.40	2.34
1.50	1.15	1.35	1.1
2.54	0.75	0.60	0.6
1.20	1.20	1.40	1.3
	9.30	10.20	

T0-263

BRLV25T50BD

() /