

/ Descriptions

40V 5.0A


/ Features

/ Applications


/ Equivalent Circuit




/ Pinning







PIN	DESCRIPTION
1	Cathode
2	Anode

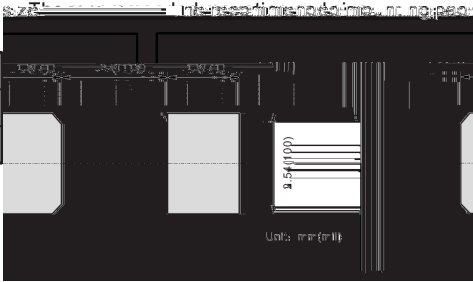


/ Marking




/ Electrical Characteristic Curve

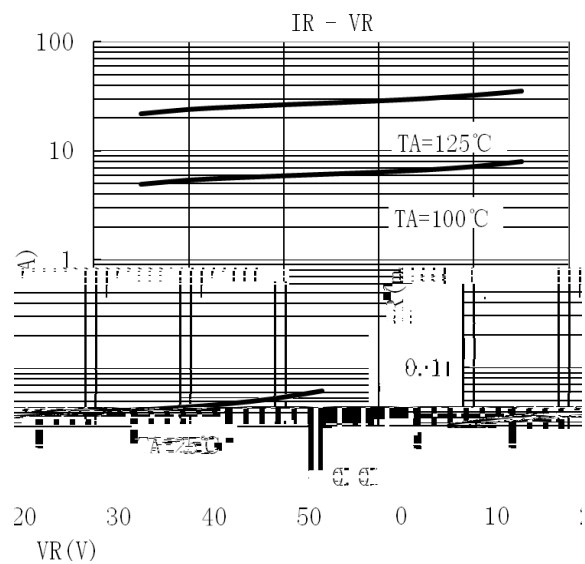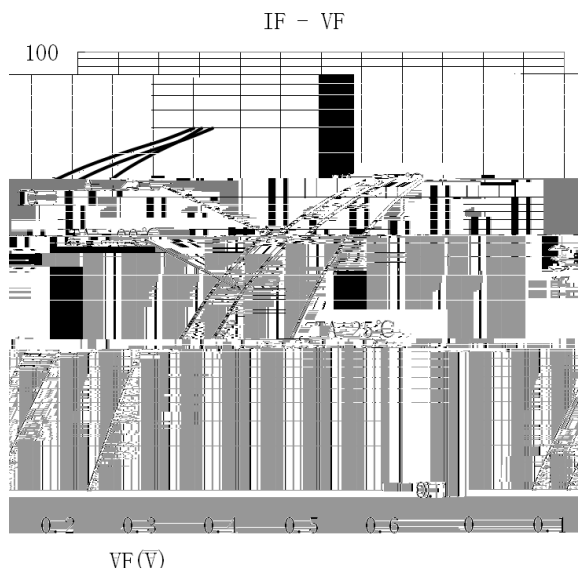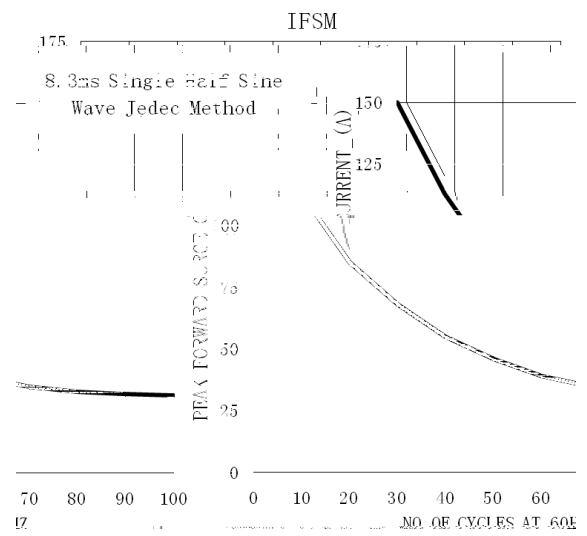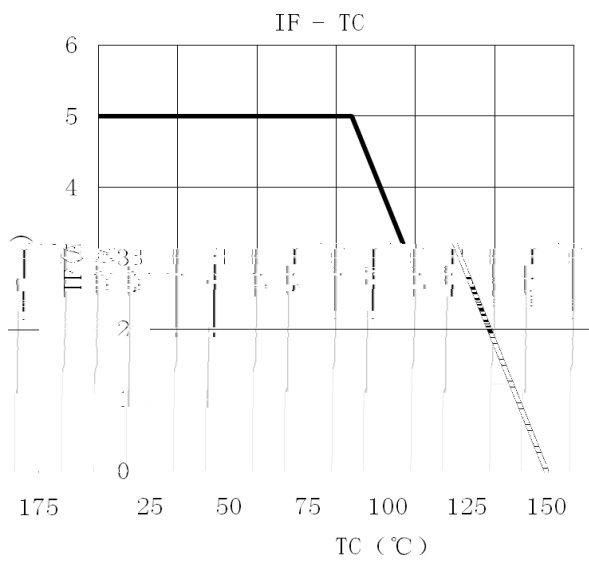


SMBF

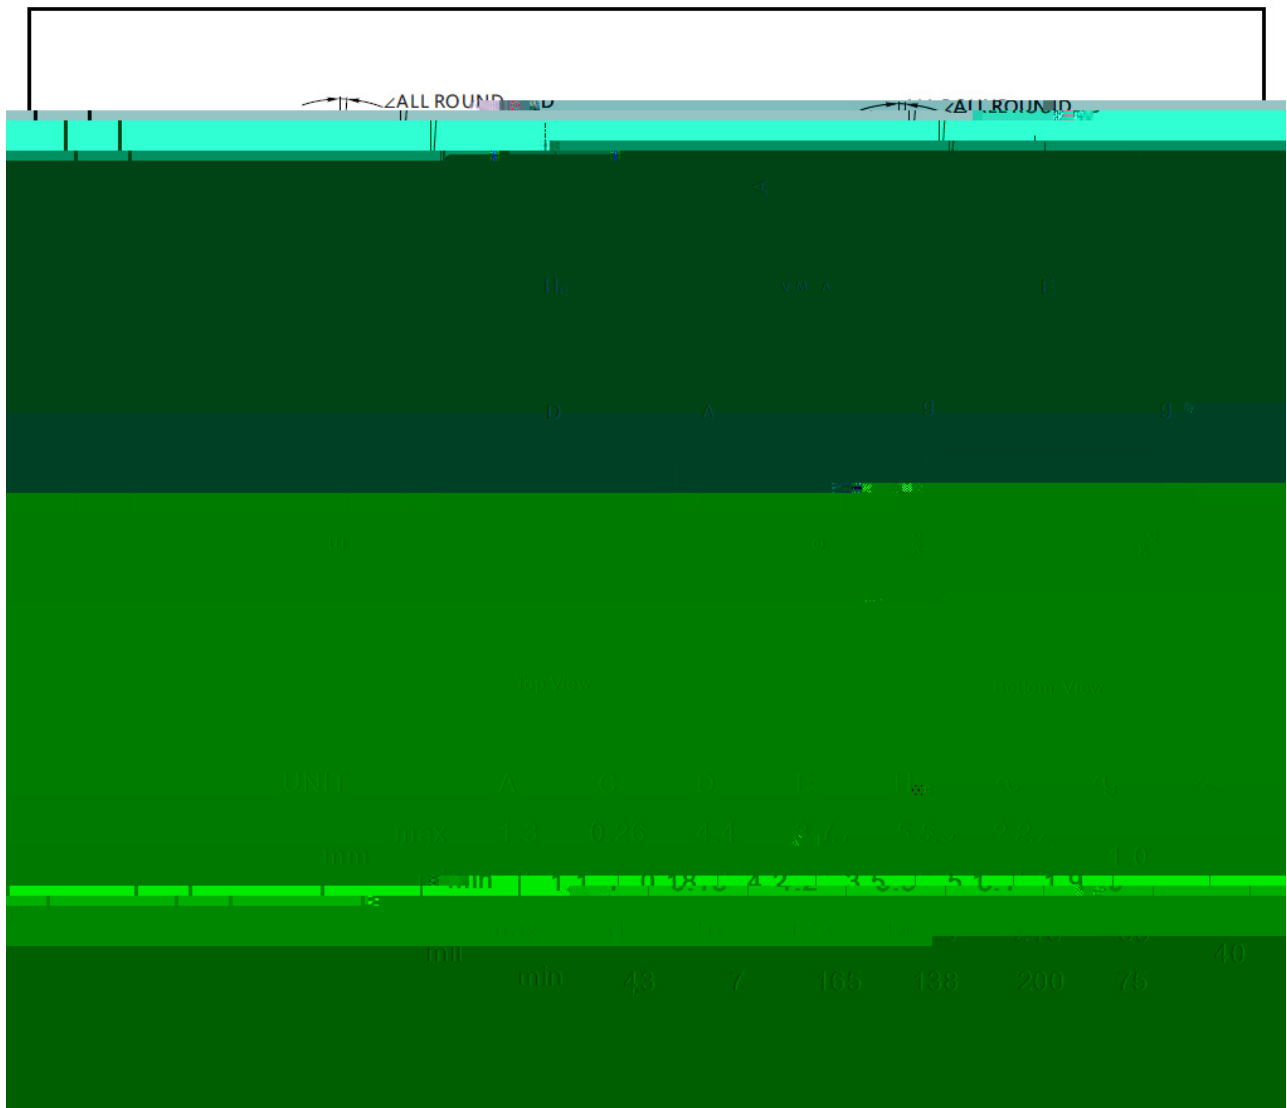

/ Marking Instructions

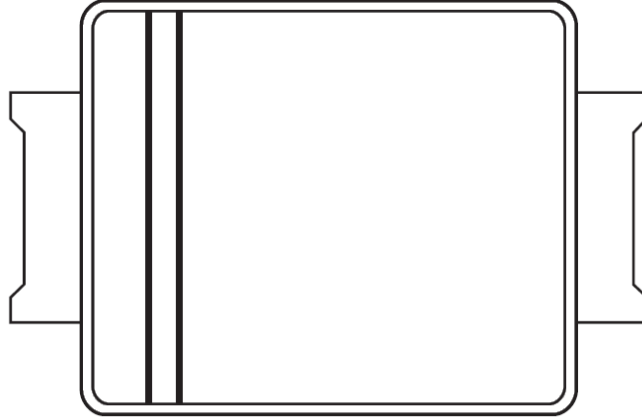

() / Wh p shrdwxrh Prriioh irr IU Uhiorw Vroghriqj +Pe-Frhh,

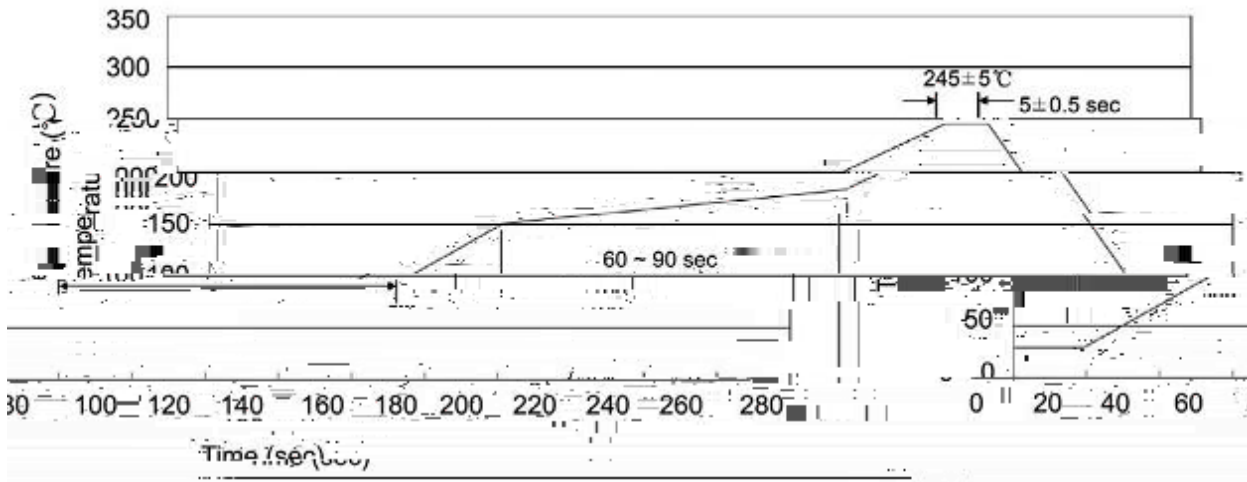

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± ± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱

/ Notices