

**BRMMBT2222AQ**

**BRMMBT2222AQ**

Rev.A Dec.-2021

**BRMMBT2222AQ**




Rev.A Dec.-2021

**DATA SHEET**

<http://>





/ Electrical Characteristic Curve

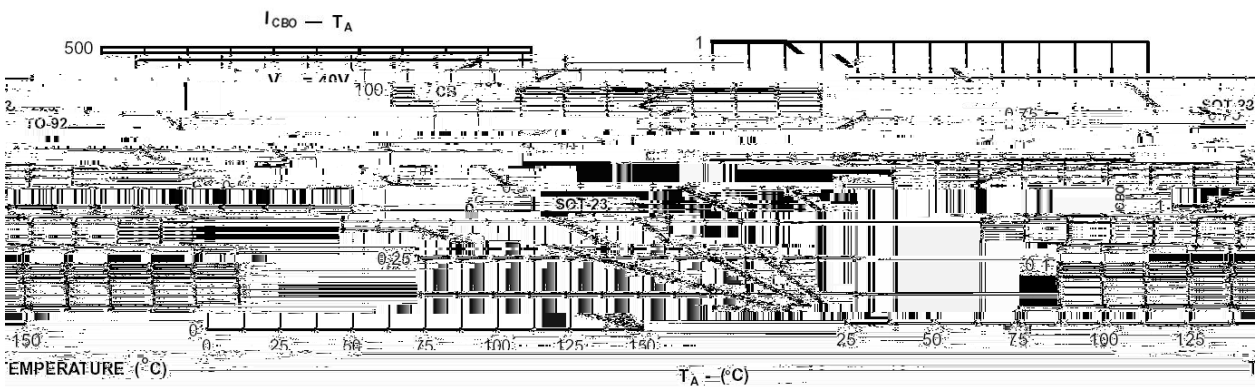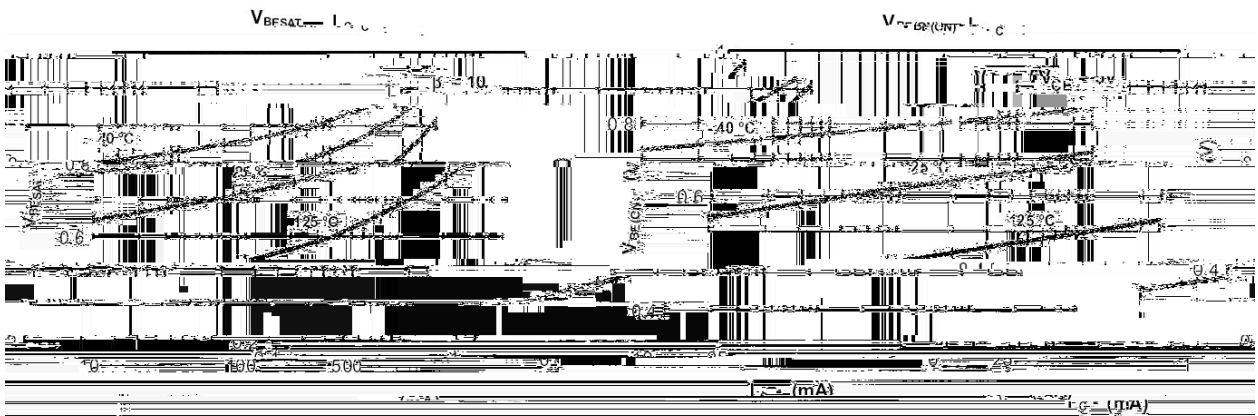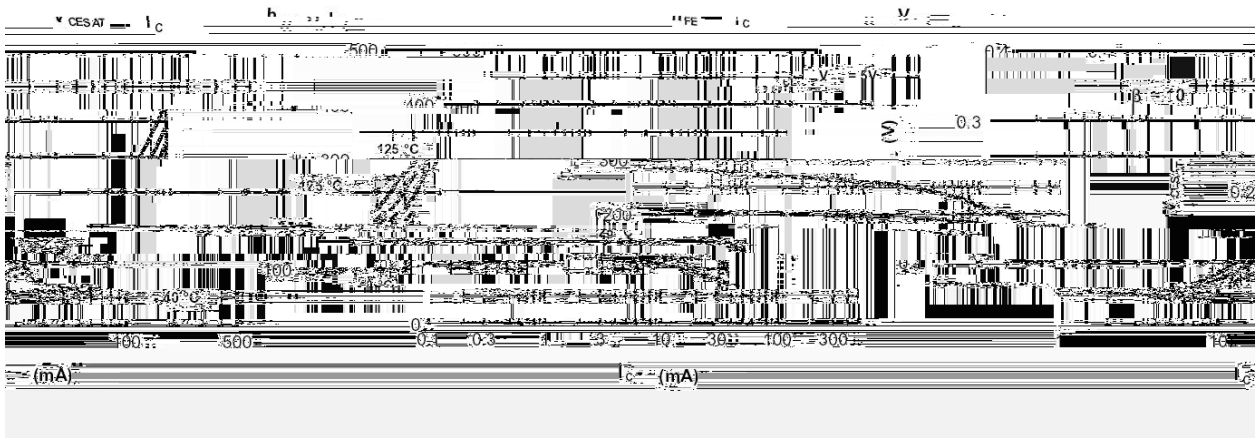



/ Package Dimensions

UNIT: mm

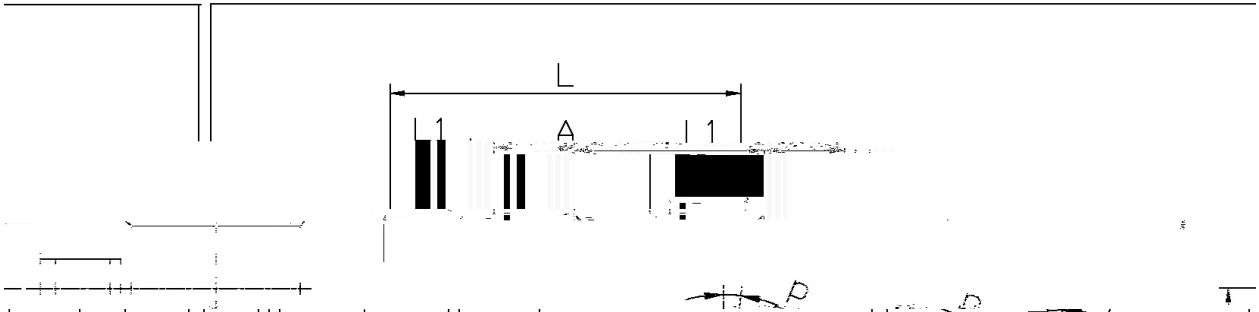

Symbol	Value	Symbol	Value	Symbol	Value	Symbol	Value
B	2.70	A	1.15	K	0	C	0.05
E	1.70		1.50	M	0.20MIN		
F	0.85		0.85	P	7°		



Q

1P

Note:

Q: Automobile halogen-free product Code

1P Product Type Code



( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)


说明：

- 1、预热温度 150 ~ 200 ，时间 60 ~ 120sec;
- 2、峰值温度 255±5 ，时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2 ~ 10°C/sec.

Note:

- 1.Preheating:150~200°C, Time:60~120sec.
- 2.Peak Temp.:255±5°C, Duration:5±0.5sec.
- 3. Cooling Speed: 2~10°C/sec.