

[illegible]


/ Descriptions

SOT-363 NPN+PNP
Double NPN PNP


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

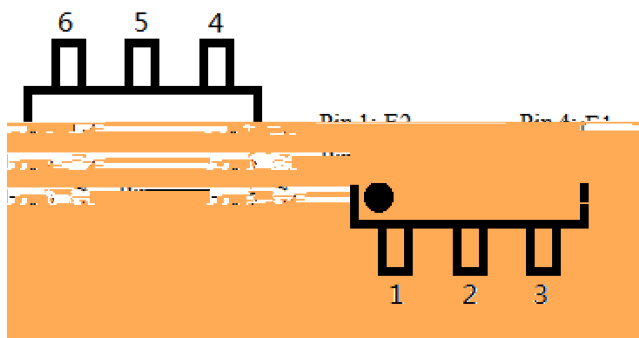
/ h_{FE} Classifications & Marking

参数	符号	数值	单位
	θ		
参数	符号	数值	单位

BRMMDT2227WS

BRMMDT2227WS

/ Package Dimensions

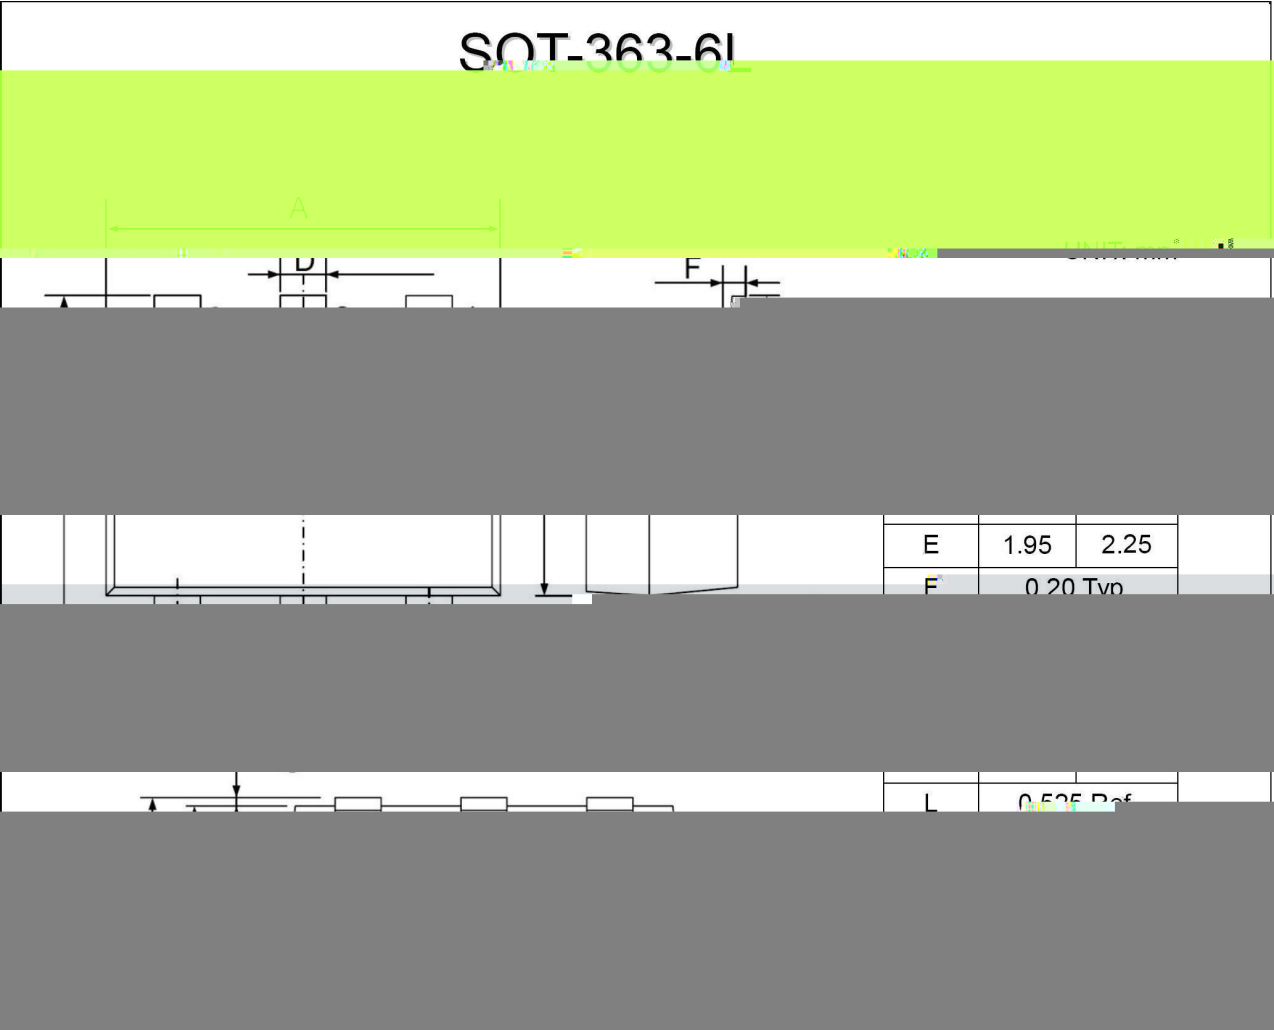

/ Marking Instructions

•

•

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

±

°C

±

°C

±

°C

±

°C

/ Resistance to Soldering Heat Test Conditions

±

°C

±

/ Packaging SPEC.

!	" # \$					" % & '		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box (	Outer Box)
SOT-363	3,000	10	30,000	6	180000	7" ×8	180×120×180	390×385×205