




Rev.B Nov.-2021



silicon NPN and PNP transistor in a SOT-363 Plastic Package

With built-in bias resistors, simplify circuit design, reduce a quantity of parts and manufacturing process. Halogen free product.

Switching applications, interface circuit and driver circuit applications.

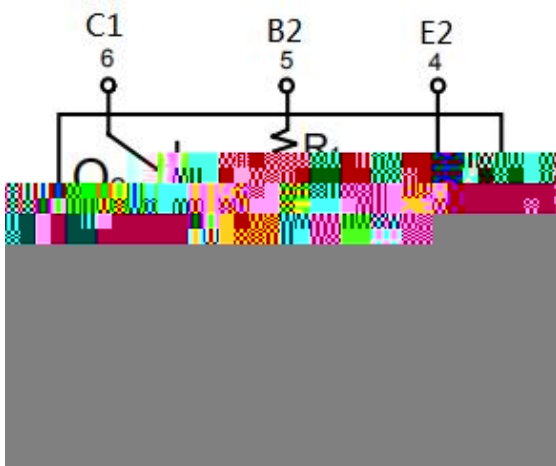

Marking	H311
---------	------






Parameter	Symbol	Rating	Unit
Output Voltage	V_{CC}	-50	V
Input Voltage	V_{IN}	-40	V
		10	V
Output Current	I		





Rev.B Nov.-2021

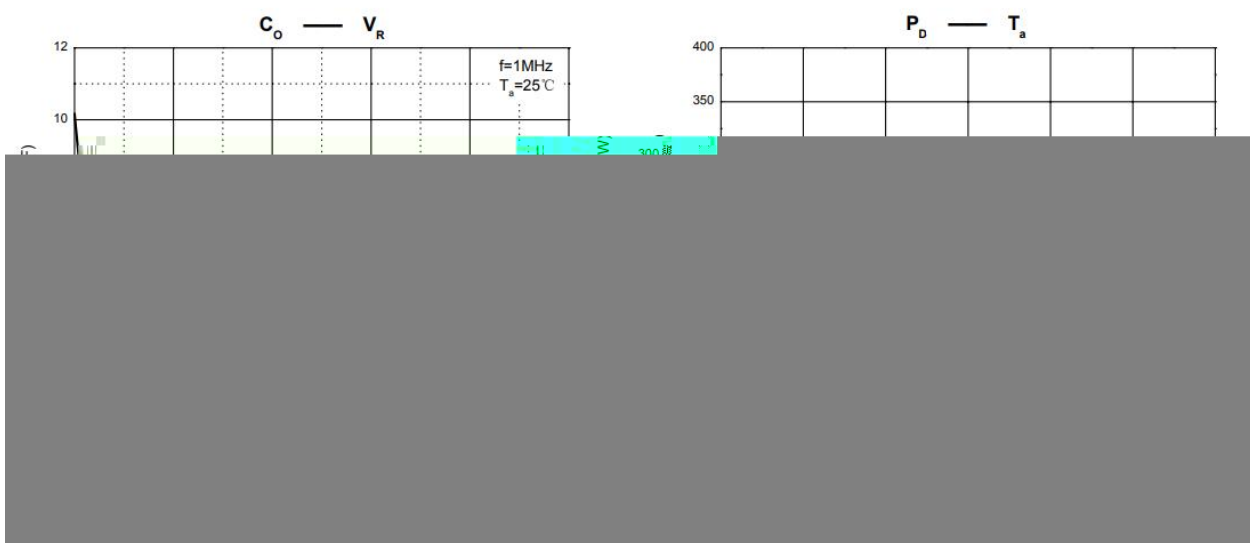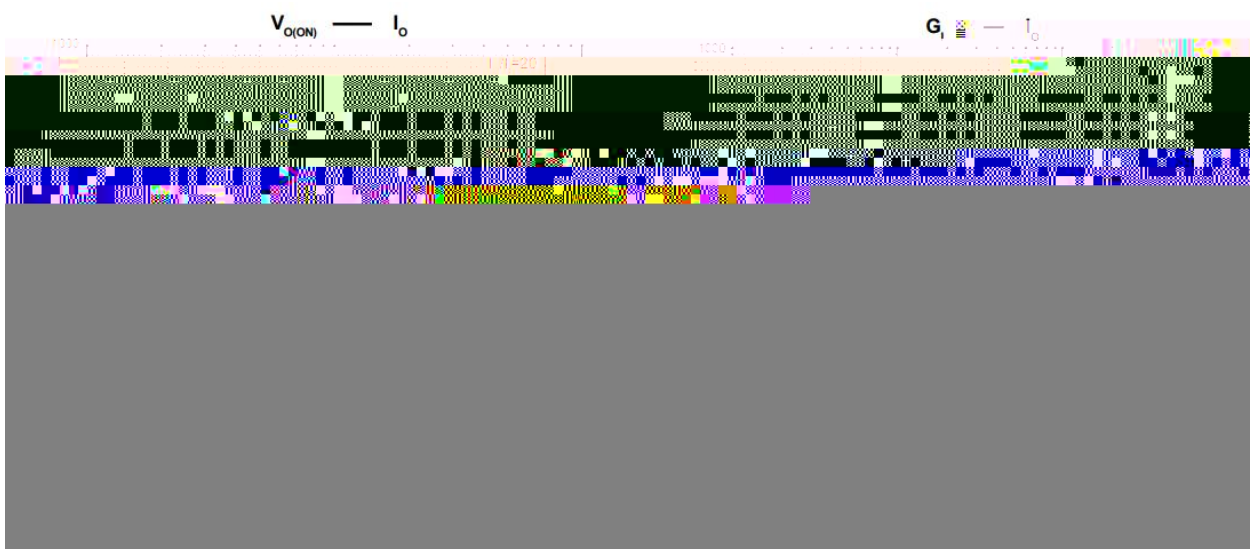

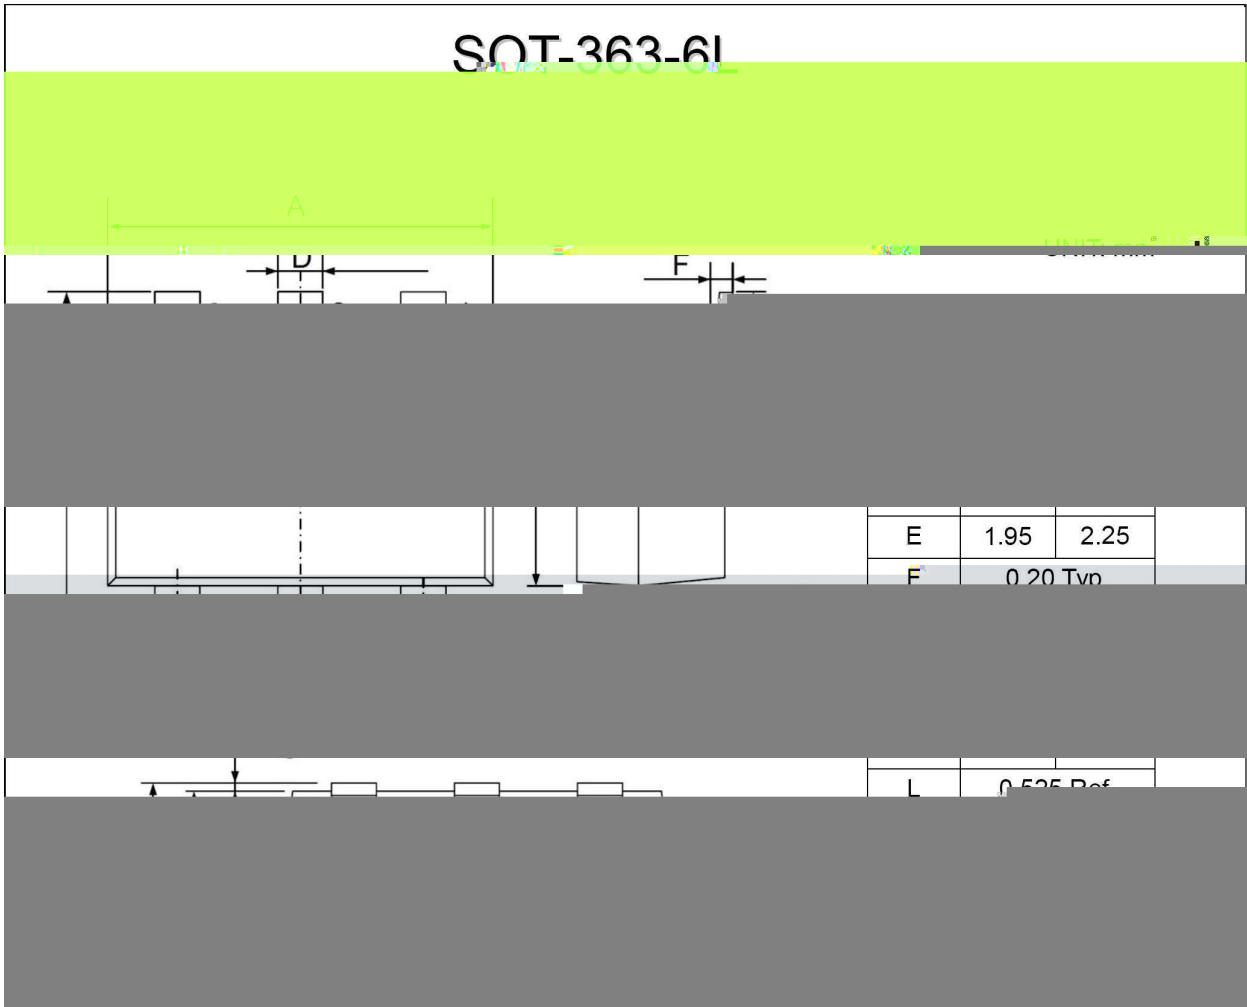



H311 * * *

- " 1"
H311
***:
Note:
- "1" Pin
H311 Product Type Code
***: Lot No. Code, code change with Lot No.



Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

- | | | | |
|---|---------|-----------|-----------------------------------------|
| 1 | 150 180 | 60 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245±5 | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | 2 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

260±5 10±1 sec. Temp.:260±5°C Time:10±1 sec

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box
SOT-363	3,000	10	30,000	6	180000	7" x8"	180x120x180	390x385x205