


# BRMUR15120AC

Rev.B Jan.-2019

DATA SHEET

Parameter


/ Electrical Characteristic Curve

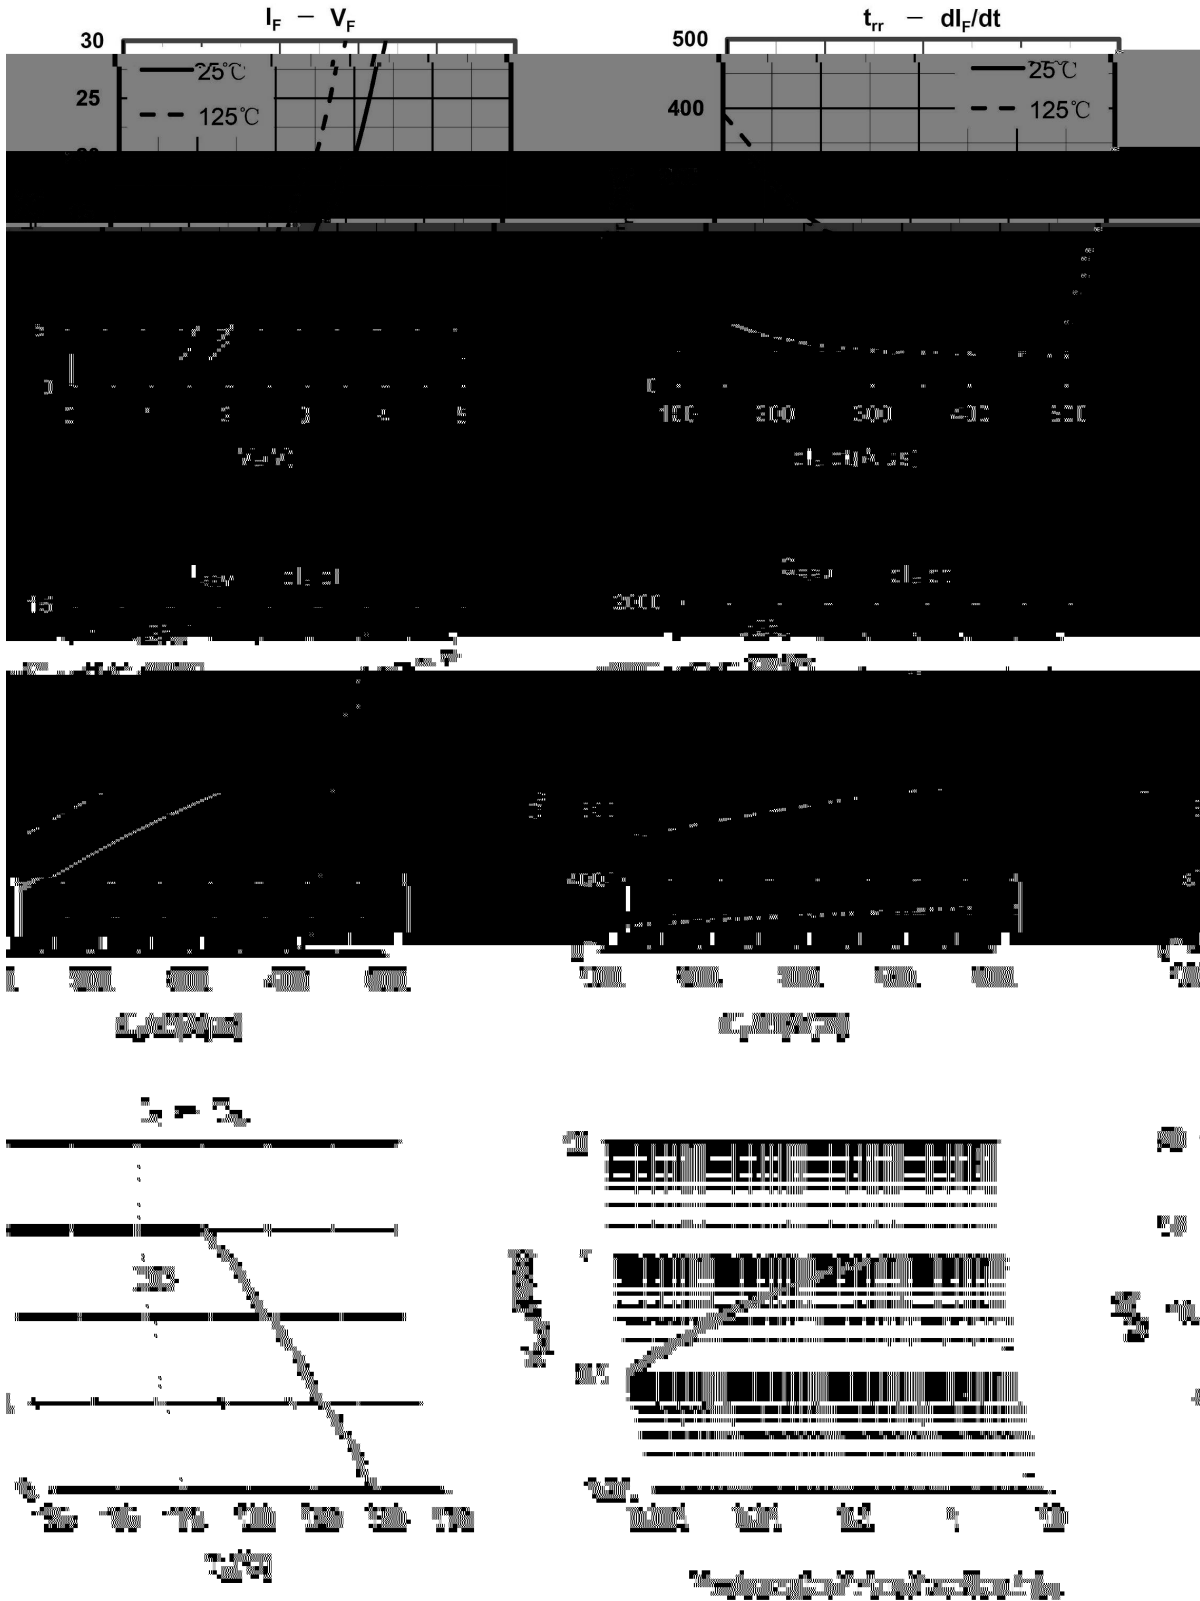


/ Package Dimensions

TD-220AC

Unit:mm

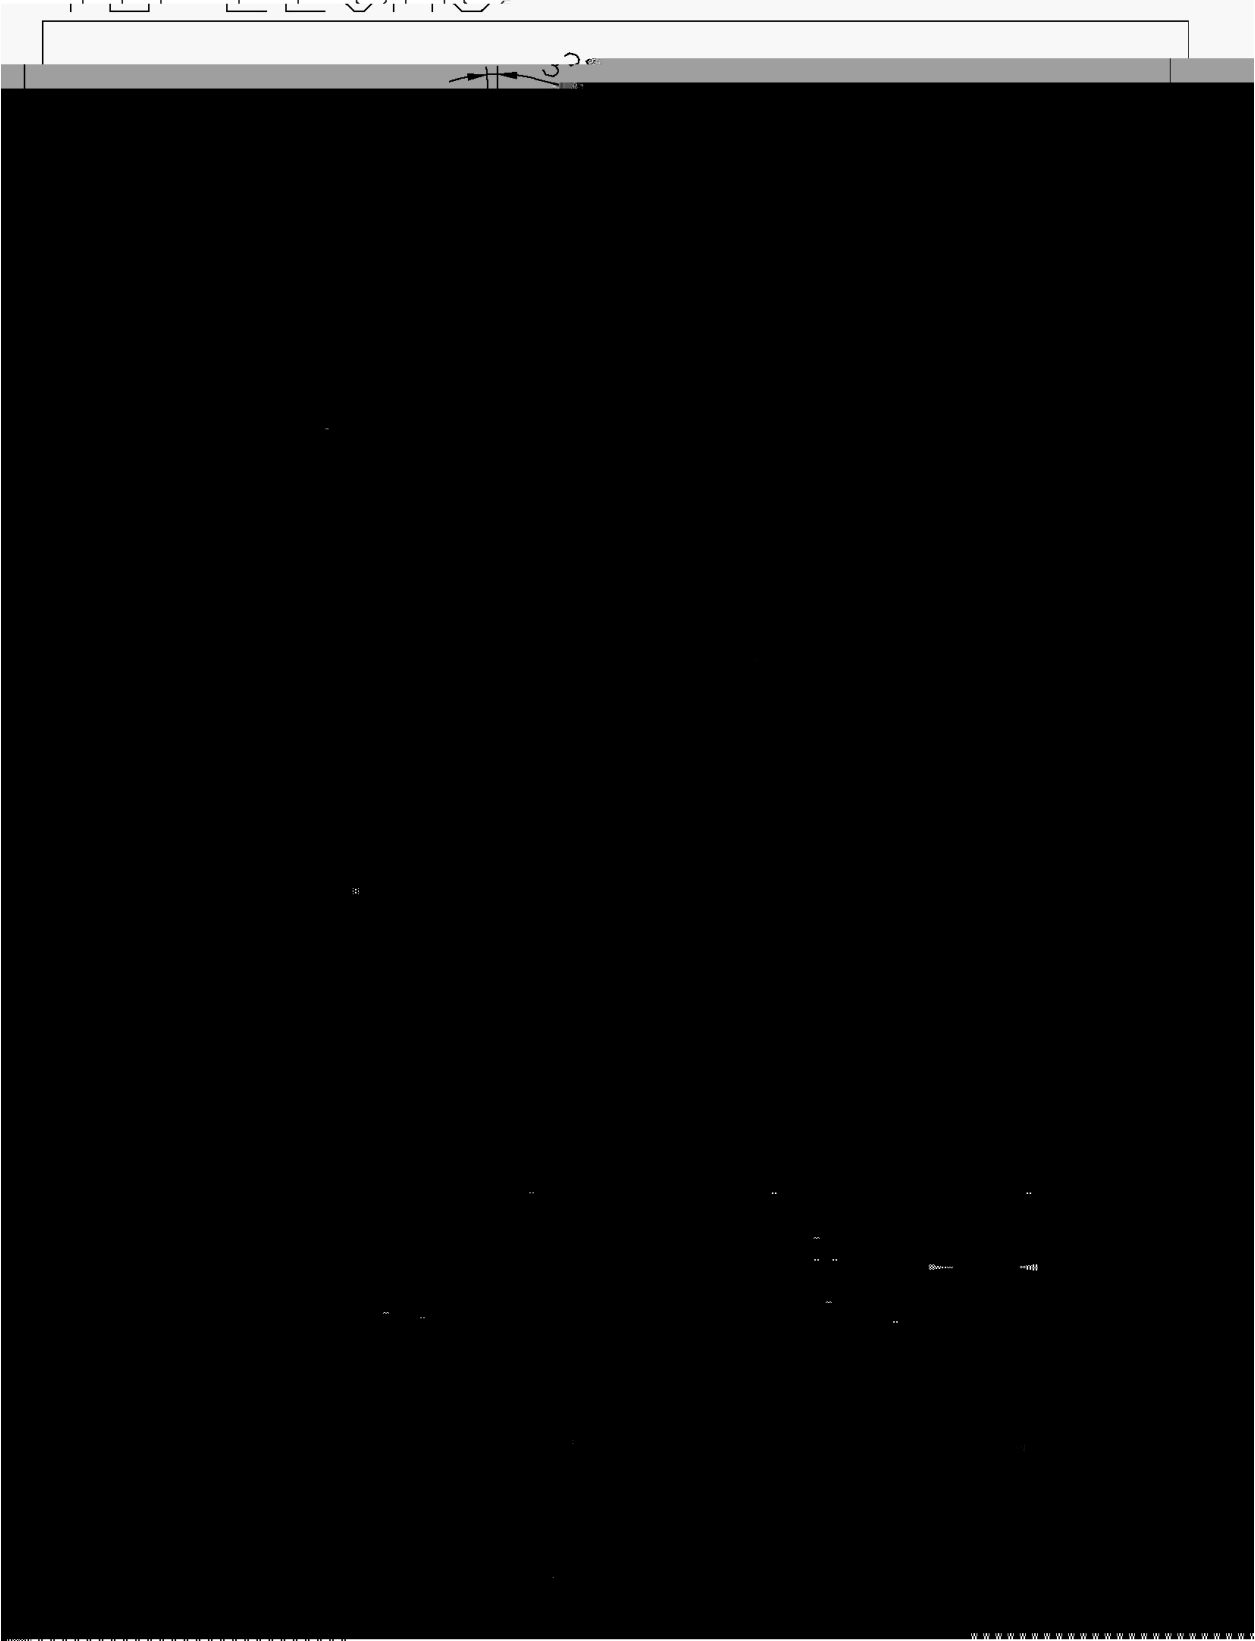

**/ Marking Instructions**

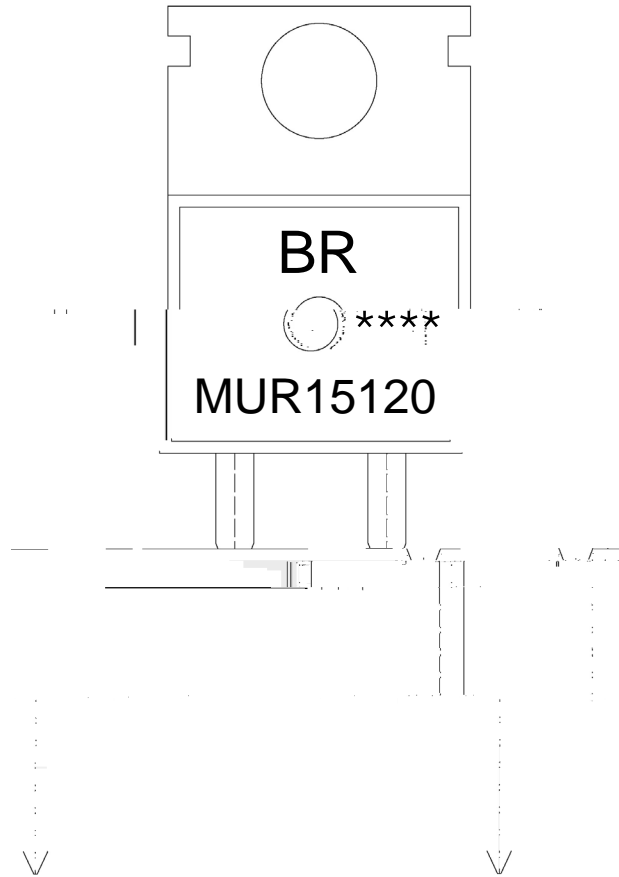


91  
D L I ( , ( )'  
!!!!

**Note:**

- BR: Company Code
- MUR15120 Product Type Code.
- \*\*\*\*: Lot No. Code, code change with Lot No.

( ) / Temperature Profile for Dip Soldering(Pb-Free)

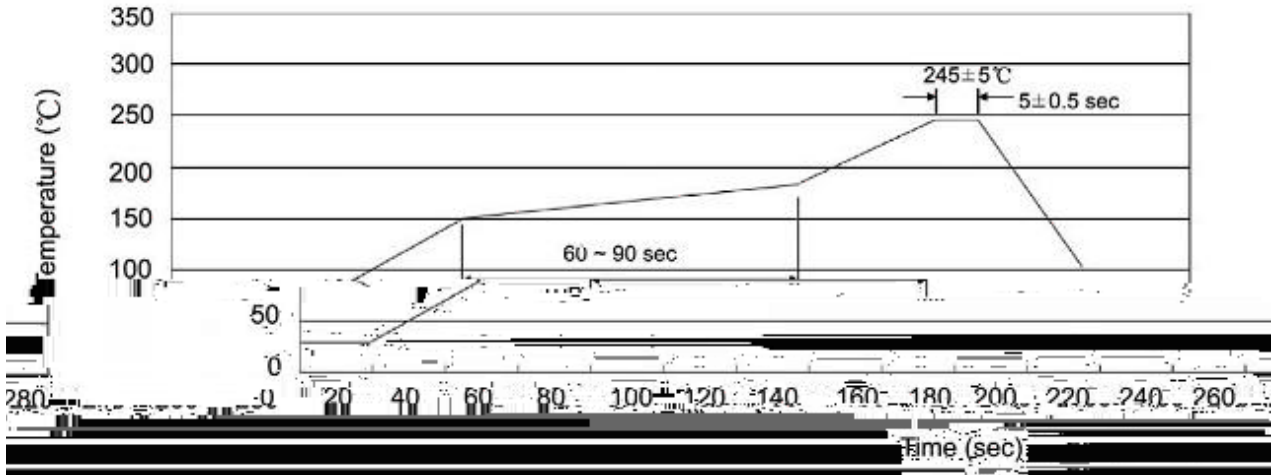

Note:

- |   |         |            |   |
|---|---------|------------|---|
| 1 | 150 180 | 60 90sec;  | 1.Preheating:150~180 , Time:60~90sec.     |
| 2 | 255..5  | 5..0.5sec; | 2.Peak Temp.:255..5 , Duration:5..0.5sec. |
| 3 | 2 10    | /sec.      | 3. Cooling Speed: 2~10 /sec.              |

/ Resistance to Soldering Heat Test Conditions

270..5                      10..1 sec.                      Temp.:270±5                      Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units					Dimension (unit mm <sup>3</sup> )		
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-220/F/AC	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

/ TUBE

Package Type	Units					Dimension (unit mm <sup>3</sup> )		
	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-220/F/AC	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

/ Notices