



Rev.A May.-2022






Rev.A May.-2022


Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DSS}	100	V
Drain Current – Continuous	I_D	170	mA
Drain Current– Pulsed	$I_D(T_C=25^{\circ}C)$	680	mA
Continuous Drain–Source	I_S	170	mA
Gate-Source Voltage	V_{GS}	± 20	V






Rev.A May.-2022

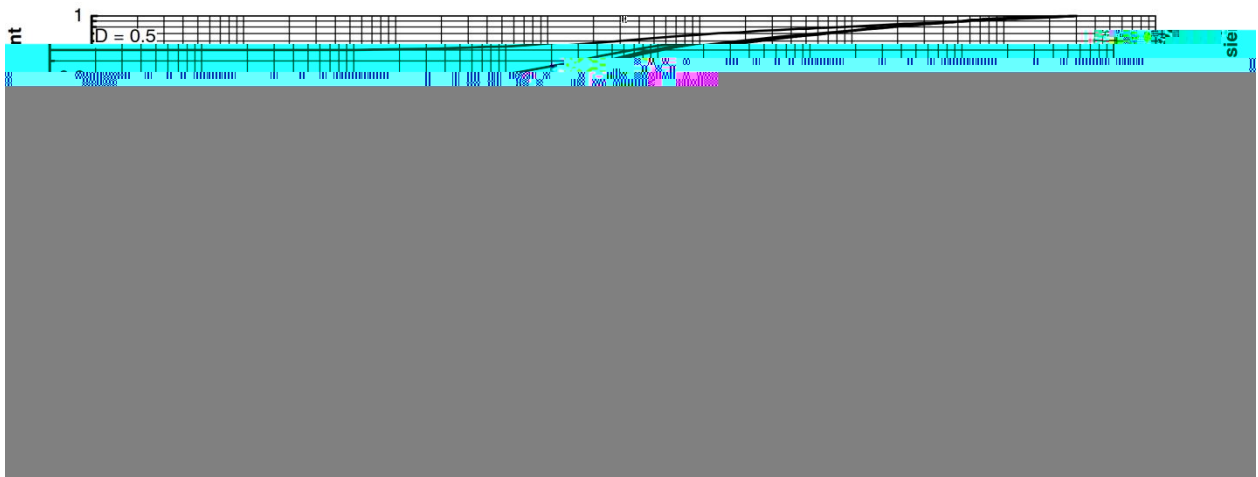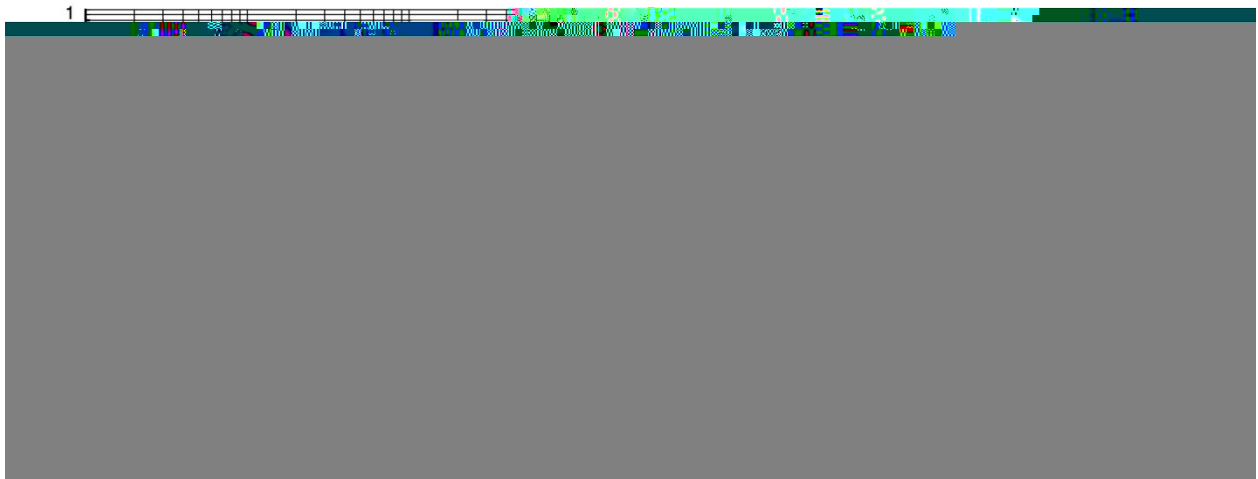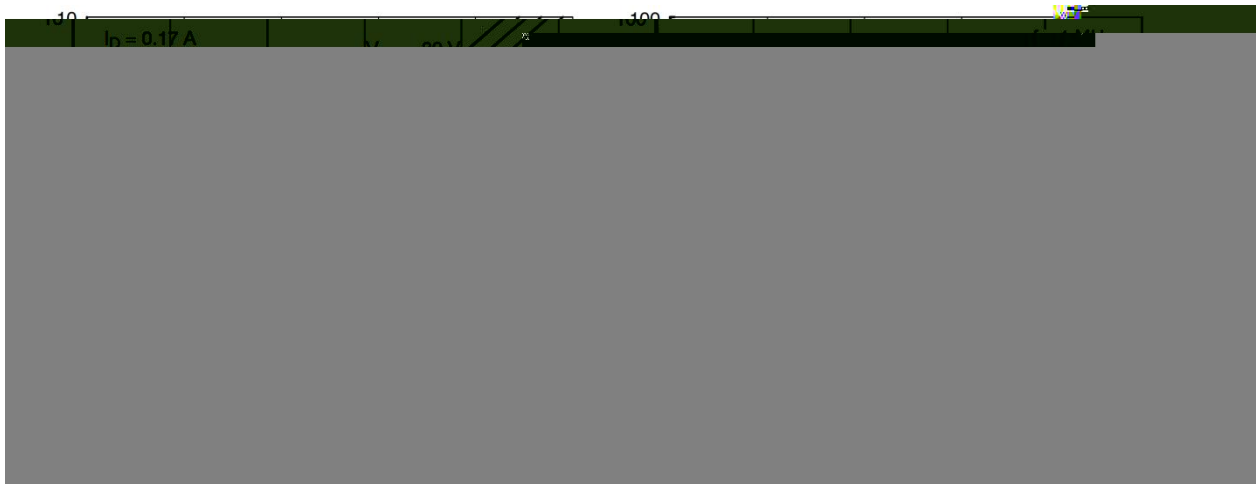

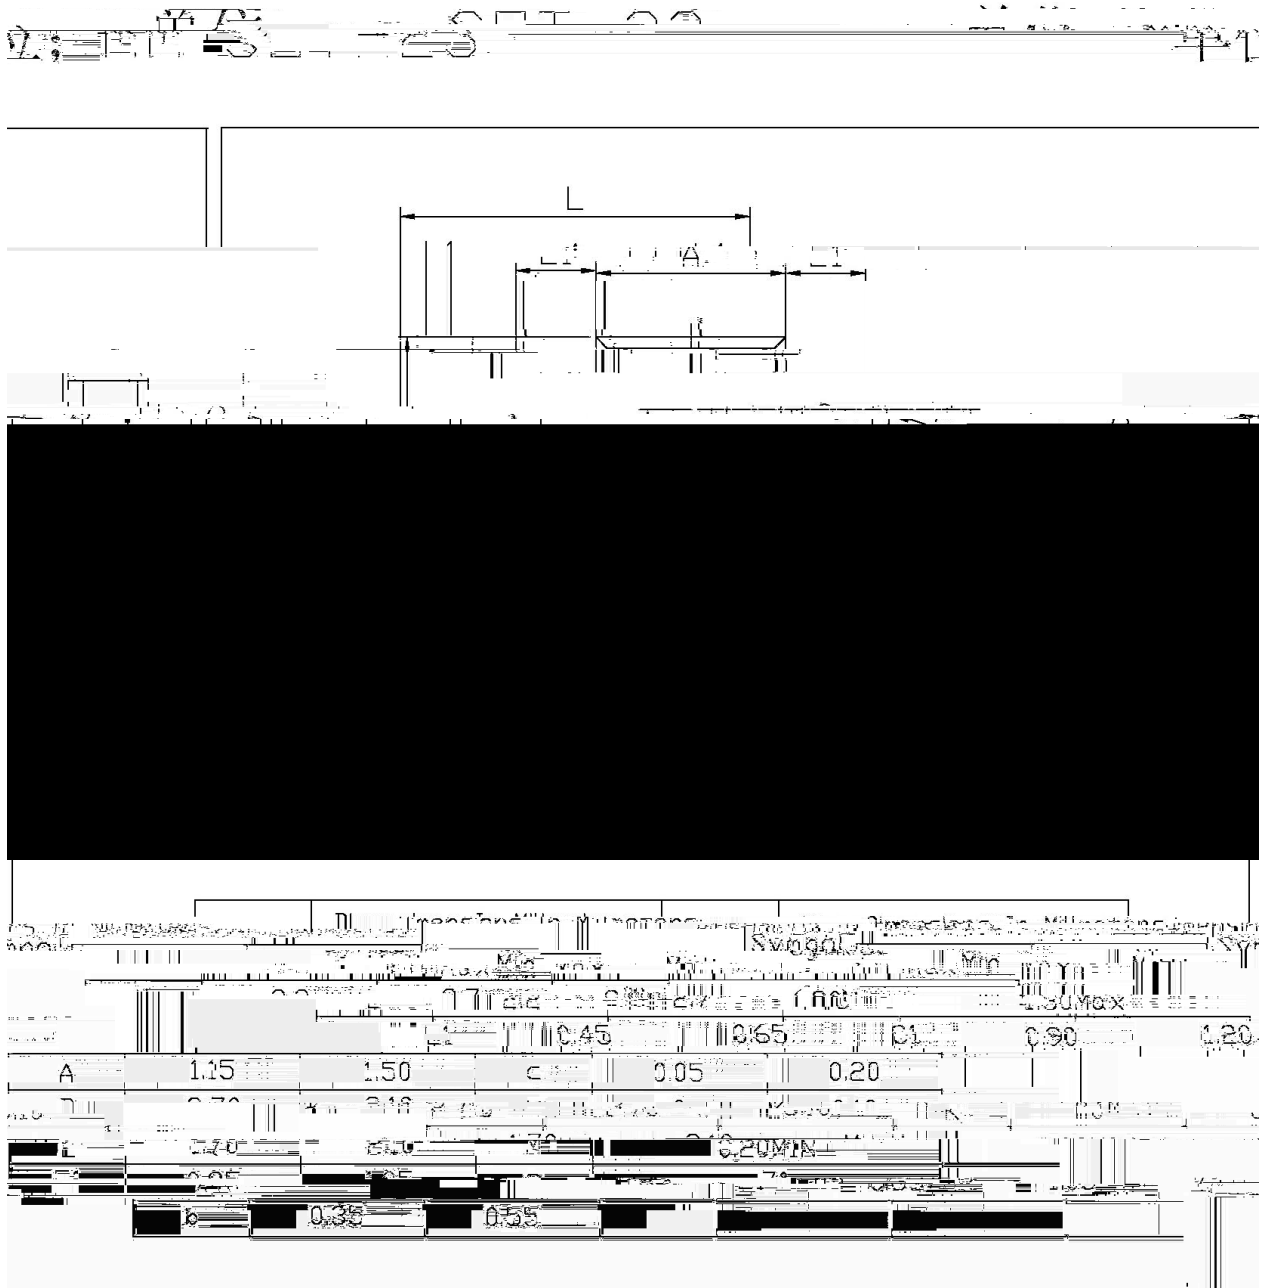



H

SA

Note:

H: Company Code

SA: Product Type



1	150 180	60 90sec;	Note:
2	245±5	5±0.5sec;	1.Preheating:150~180°C, Time:60~90sec.
3	2	10°C/sec.	2.Peak Temp.:245±5°C, Duration:5±0.5sec.
			3. Cooling Speed: 2~10°C/sec.

260±5°C	10±1 sec.	Temp.:260±5	Time:10±1 sec
---------	-----------	-------------	---------------

/ REEL