

/ Descriptions


TO-92 NPN Silicon NPN transistor in a TO-92 Plastic Package.

/ Features

KSB1116(A)
 Complementary pair with KSB1116(A)

/ Applications

Audio frequency power amplifier, medium speed switching.

/ Equivalent Circuit**/ Pinning**



PIN1 Base PIN 2 Collector PIN 3 Emitter

/ hFE Classifications & Marking

h _{FE} Classifications Symbol	Y	G	L
h _{FE} Range	135~270	200~400	300~600

Parameter	Symbol		Rating	Unit
Collector to Base Voltage	V_{CBO}	KSD1616	60	V
		KSD1616A	120	
Collector to Emitter Voltage	V_{CEO}	KSD1616	50	V
		KSD1616A	60	
Emitter to Base Voltage	V_{EBO}		6.0	V
Collector Current - Continuous	I_C		1.0	A
Collector Current – Continuous(Pulse)	I_{CP}		2.0	A


/ Electrical Characteristic Curve

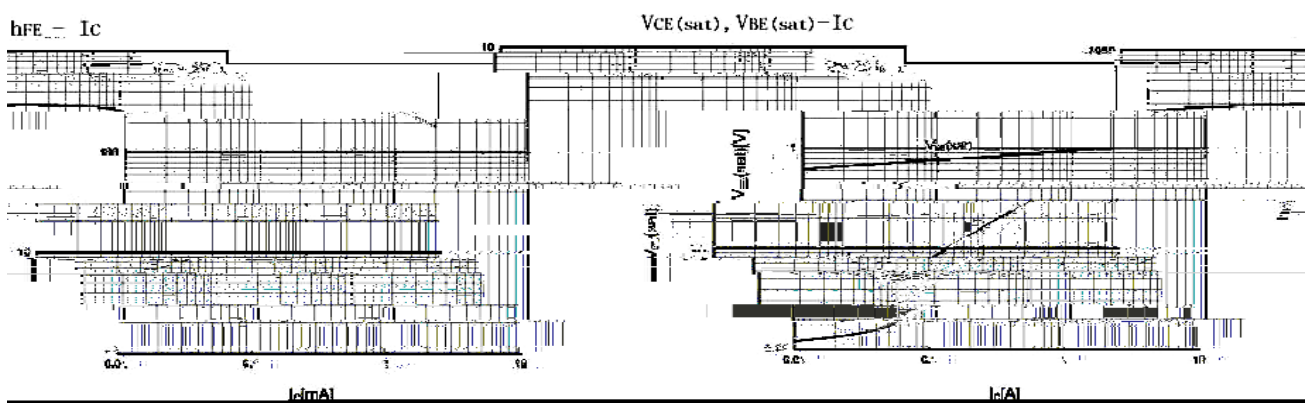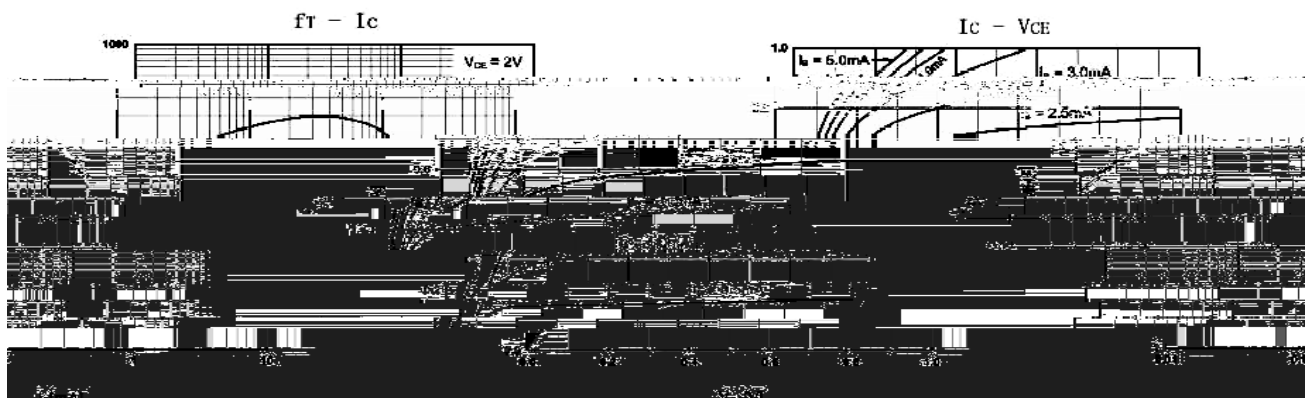


/ Package Dimensions

T0-92

Unit: mm

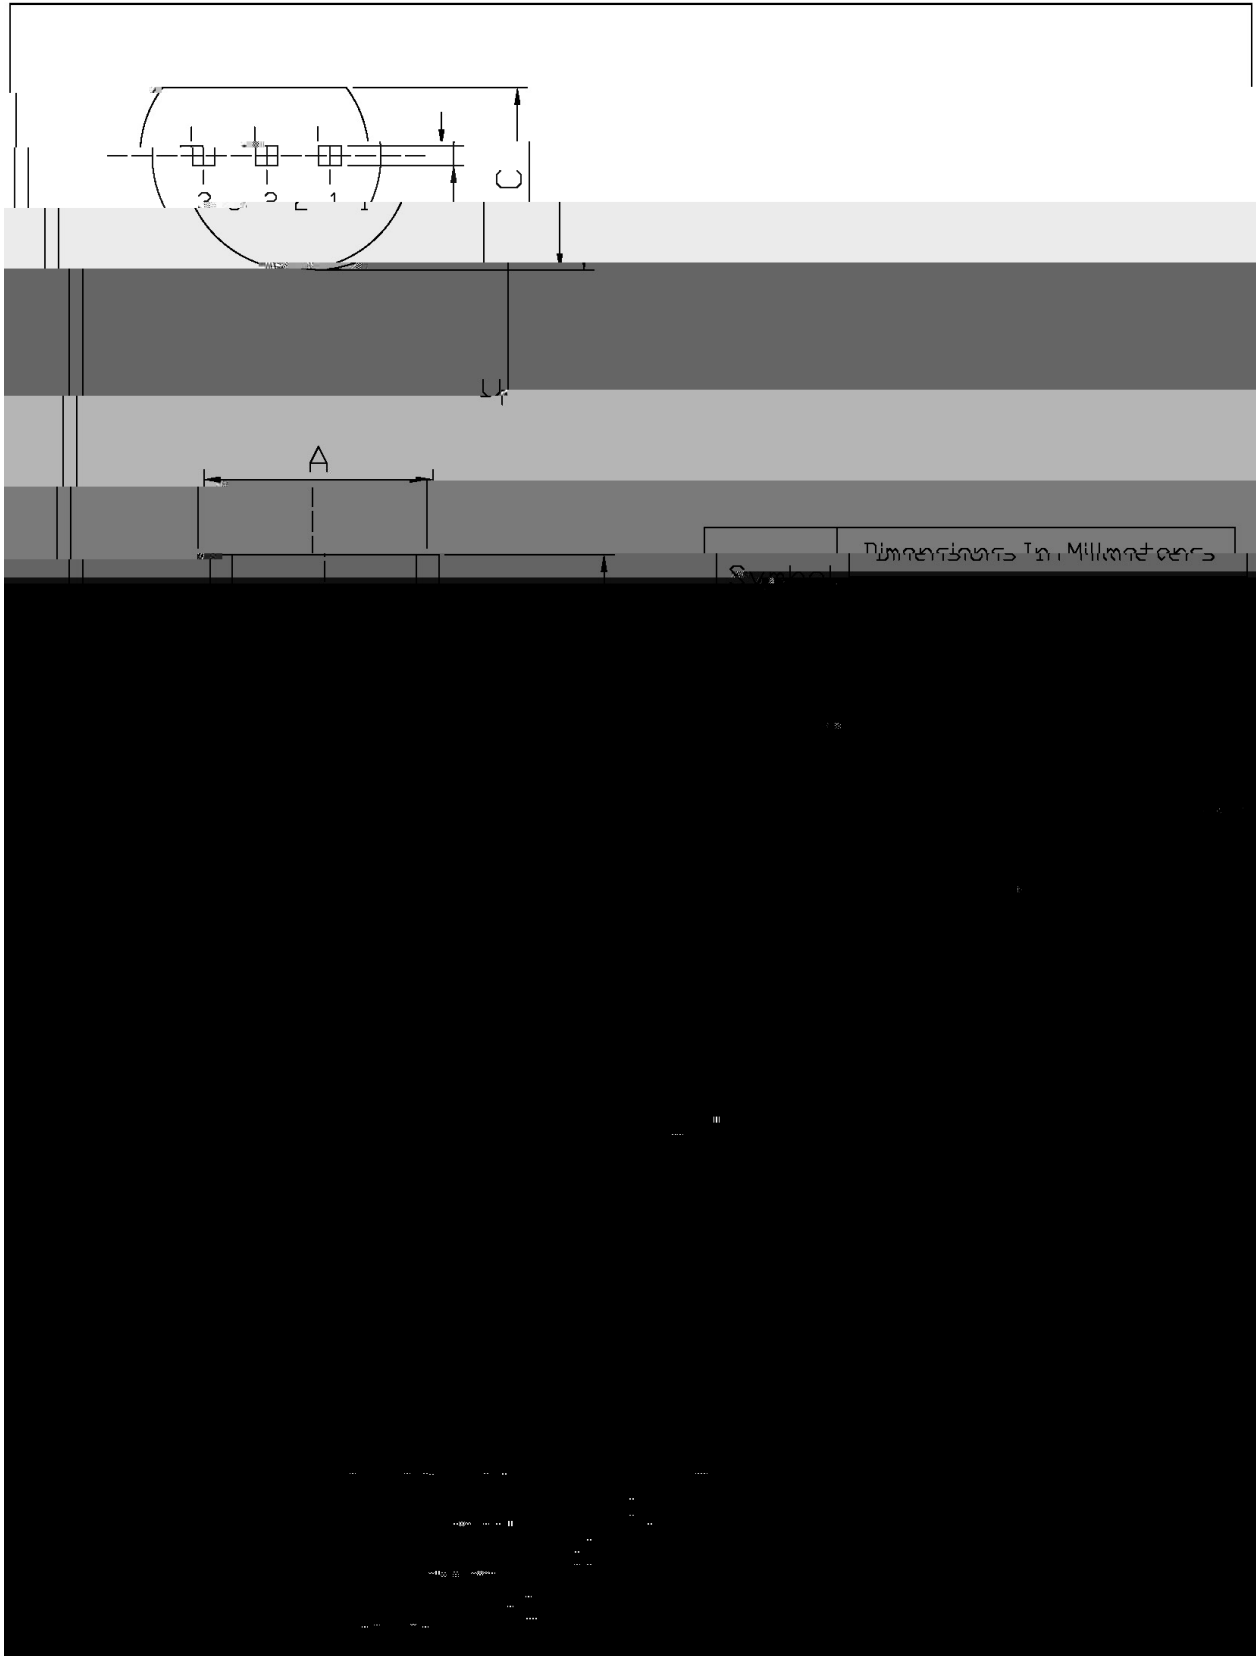

/ Marking Instructions

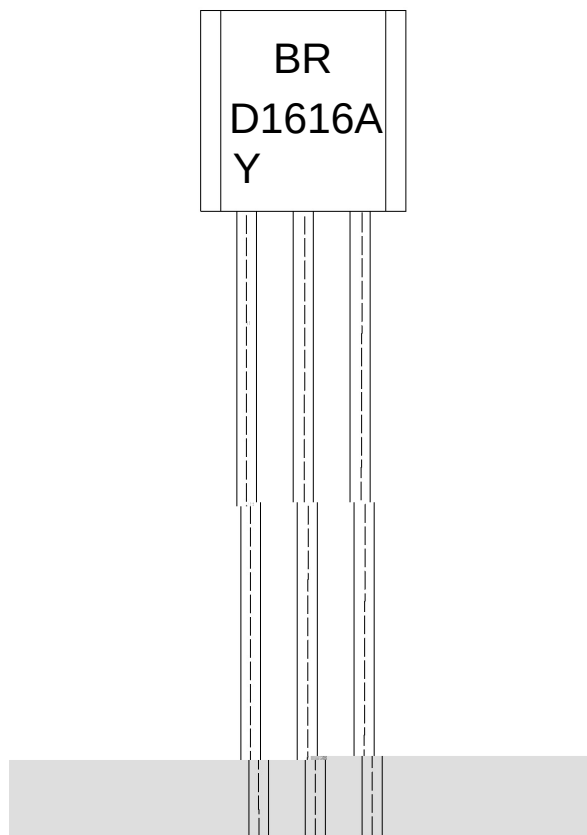

BR:

D1616A

Y: h_{FE}

Note:


BR: Company Code.

D1616A: Product Type.

Y: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

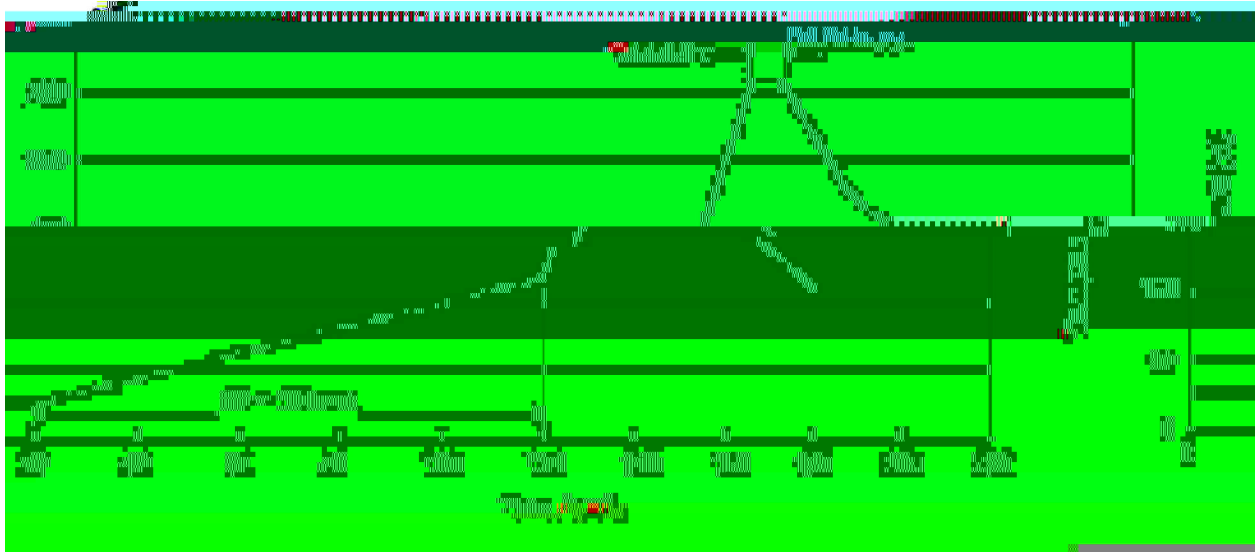

Note:

- | | | | | | |
|---|-------|-----|-----------|---|--------------------------------------|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | 2.Peak Temp.:255±5 , Duration:5±0.5sec. | |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

270±5	10±1 sec.	Temp:270±5	Time:10±1 sec
-------	-----------	------------	---------------

/ Packaging SPEC.

/ BULK

Package Type 封装形式	Units 包装数量	Dimension 包装尺寸 (unit: mm)
----------------------	------------	---------------------------