



KTA1273T
Rev.E Mar.-2016

SOT-89 PNP




Parameter	Symbol	Rating	Unit
Collector to Base Voltage			

/ Electrical Characteristic Curve

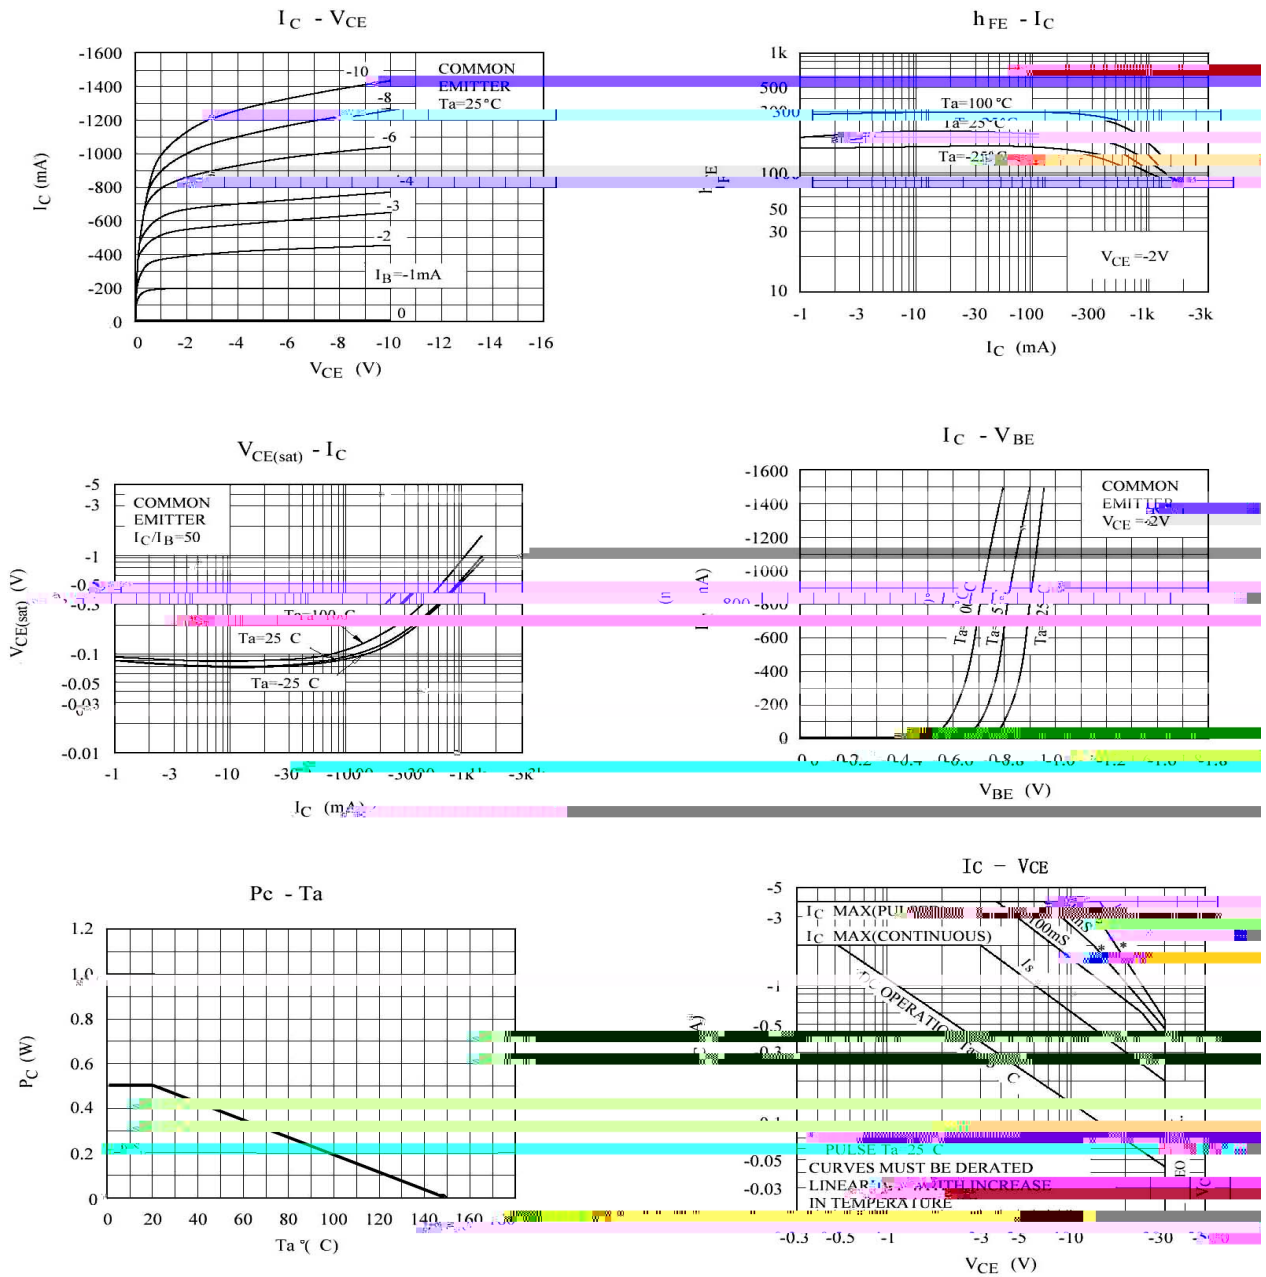

KTA1273T

/ Marking Instructions

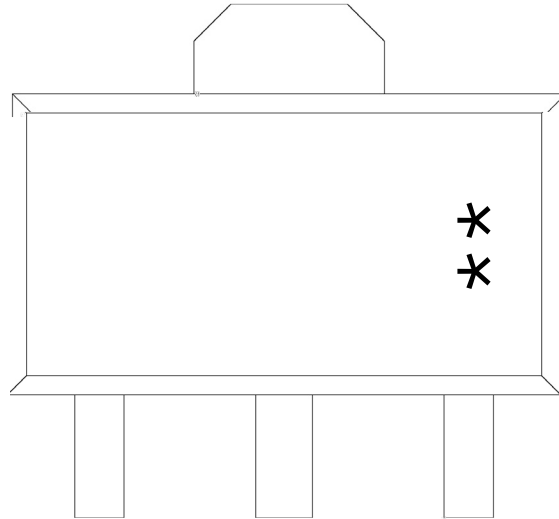

H

P3

O h_{FE}

**

Note:


H: Company Code.

P3: Product Type.

O h_{FE} Classifications Symbol

** : Lot No. Code, code change with Lot No.

() / Resistance to Soldering Heat Test Conditions

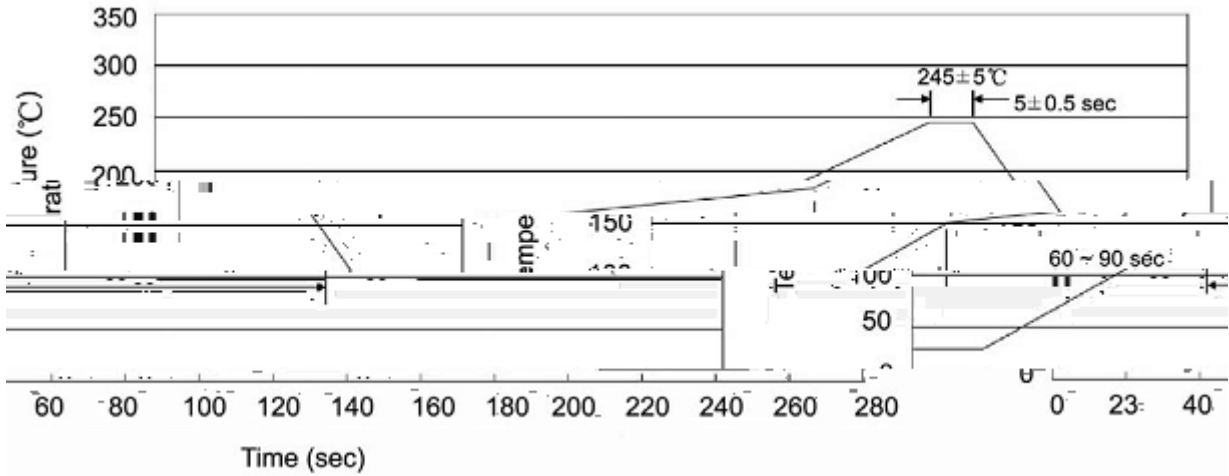

Note:

- | | | | | | |
|---|-------|-----|----|-----------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245±5 | | | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | | 2 | 10 /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装	Units 包 量				Dimension 包 尺寸 (unit: mm ³)			
	卷盘	卷盘盒	盒	盒		盒		

/ Notices