


Unit
V
V
V
A
W

Collector Power Dissipation	$P_C(T_C=25^\circ\text{C})$	10	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Emitter Breakdown Voltage	V_{CEO}	$I_C=0.7, 0.2, 1, 98, 523, 580, 11, 42, 2.86, T_C(T_j)=10.5, E_{TB}$				10.5 333.3 528.1

TU-126F

单位: mm

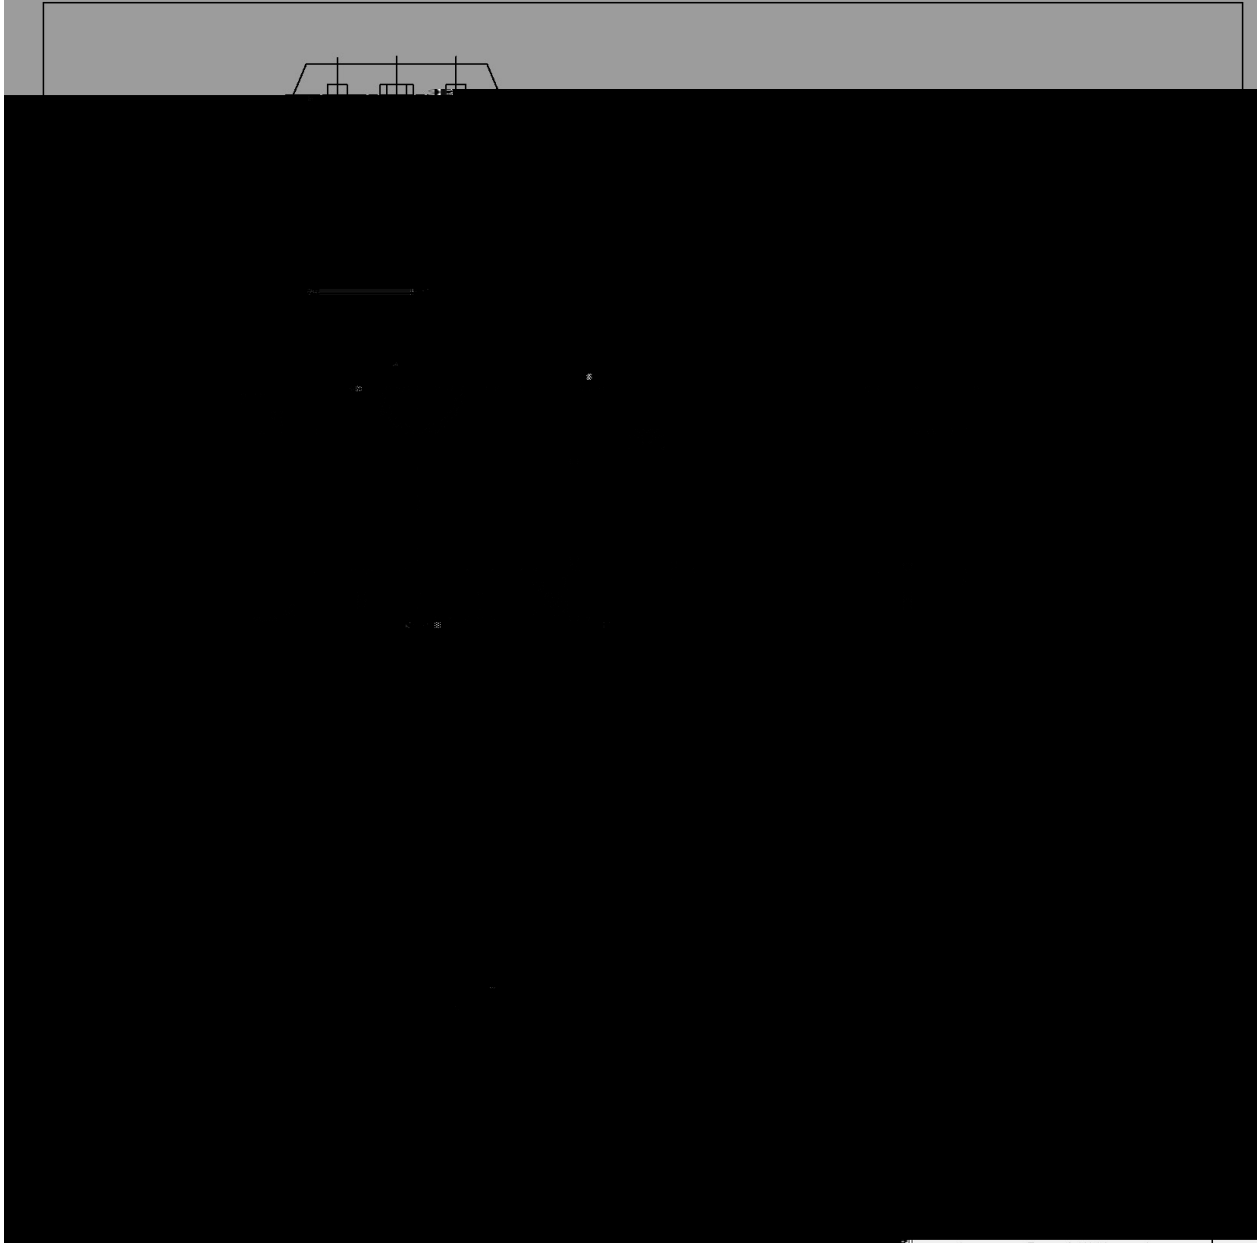

Dimensions in Millimeter		Dimensions in Millimeter	
Max	Min	Max	Min
2.96	7.8	8.2	0.66
A	B	C	D



BR


A1715

Note:

BR: Company Code

A1715: Product Type.

****: Lot No. Code, code change with Lot No.

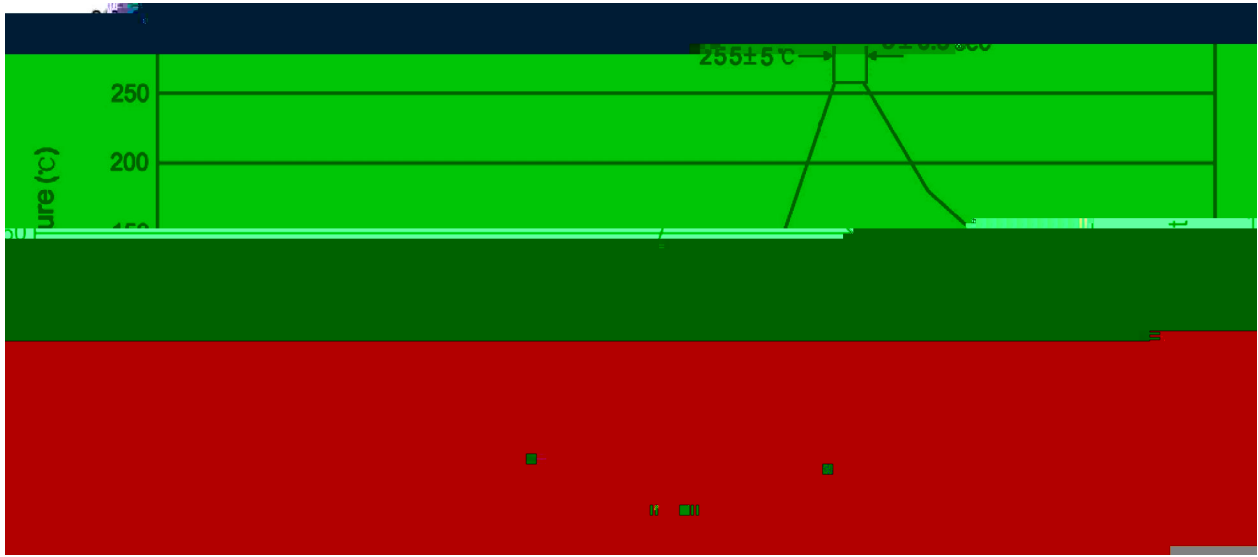

- | | | | | | | |
|---|-------|-----|-------|--------|---|--------------------------------------|
| 1 | 25 | 150 | 60 | 90sec; | Note: | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5 | sec; | 2.Peak Temp.:255±5 , Duration:5±0.5sec. | |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. | |

270±5 10±1 sec. Temp.:270±5 Time:10±1 sec

/ BULK

Package Type	Units	Dimension	(unit mm ³)
--------------	-------	-----------	-------------------------