

TO-92 NPN Silicon NPN transistor in a TO-92 Plastic Package.

KTA1271
Complementary to KTA1271.

High current application.




PIN1 Base PIN 2 Collector PIN 3 Emitter

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	35	V
Collector to Emitter Voltage	V_{CEO}	30	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current - Continuous	I_C	800	mA
Emitter Current - Continuous	I_E	-800	mA
Collector Power Dissipation	P_C	625	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

Parameter Symbol Test Conditions Min


/ Electrical Characteristic Curve

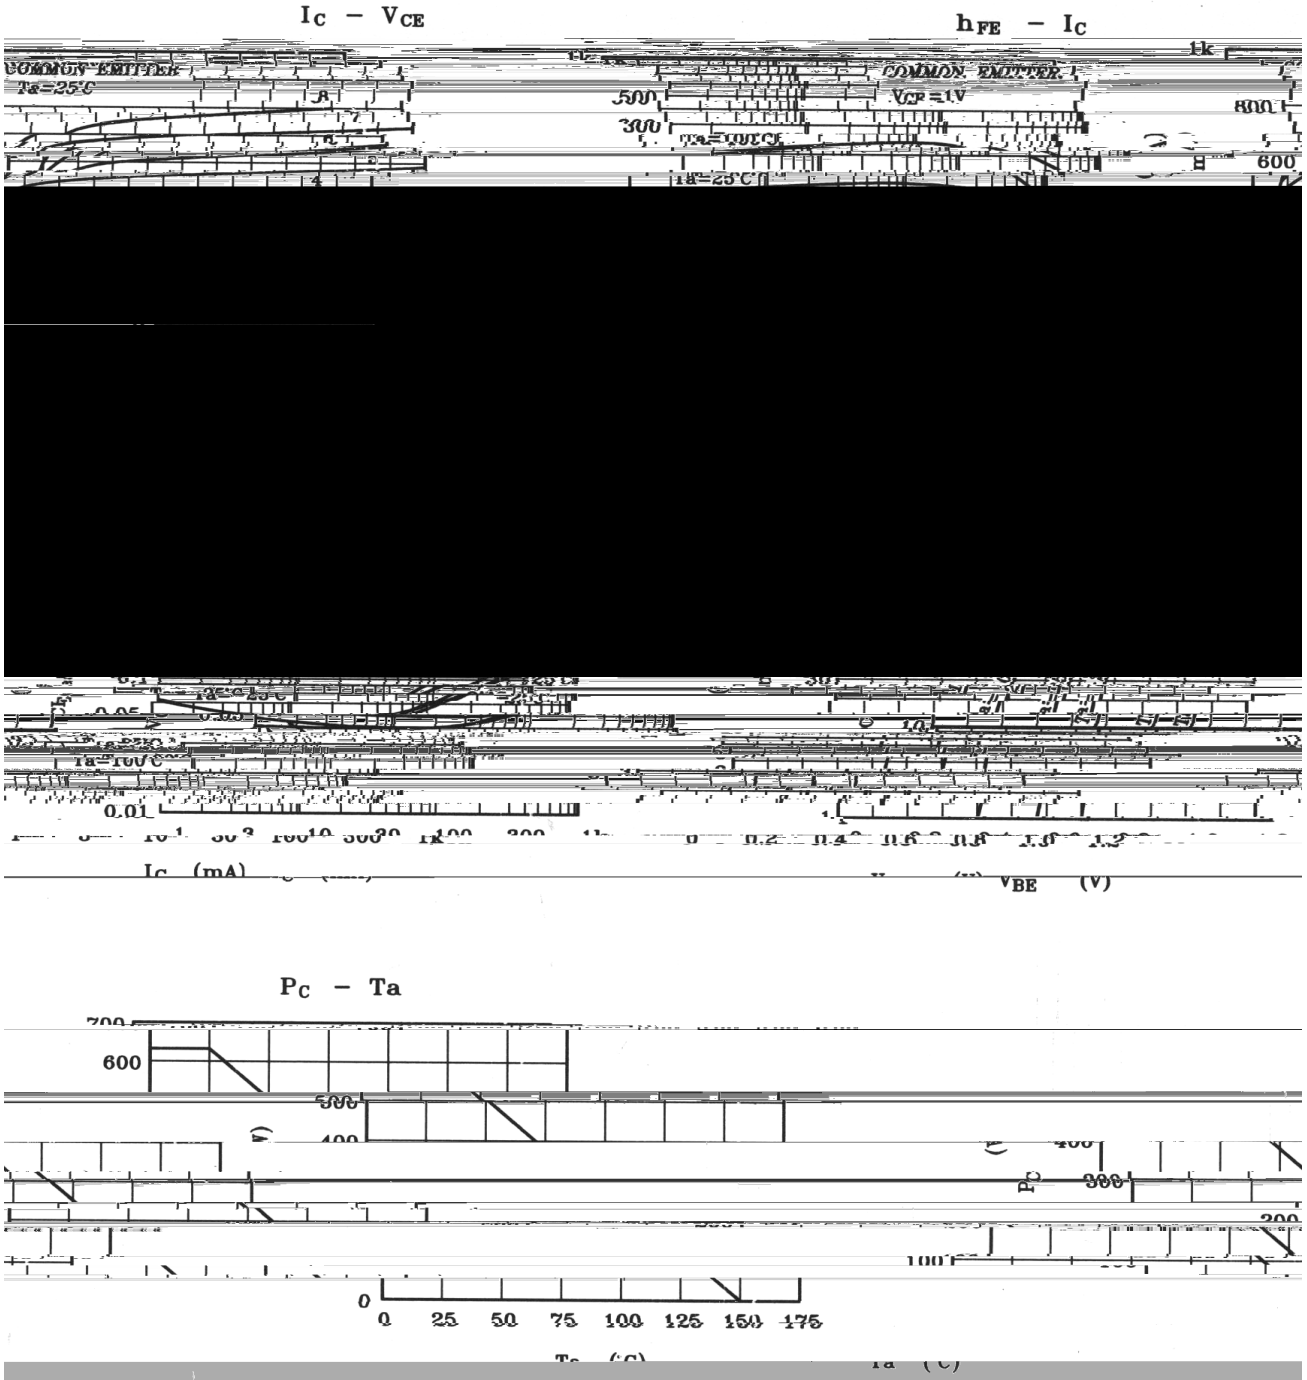


/ Package Dimensions

T0-92

Unit: mm

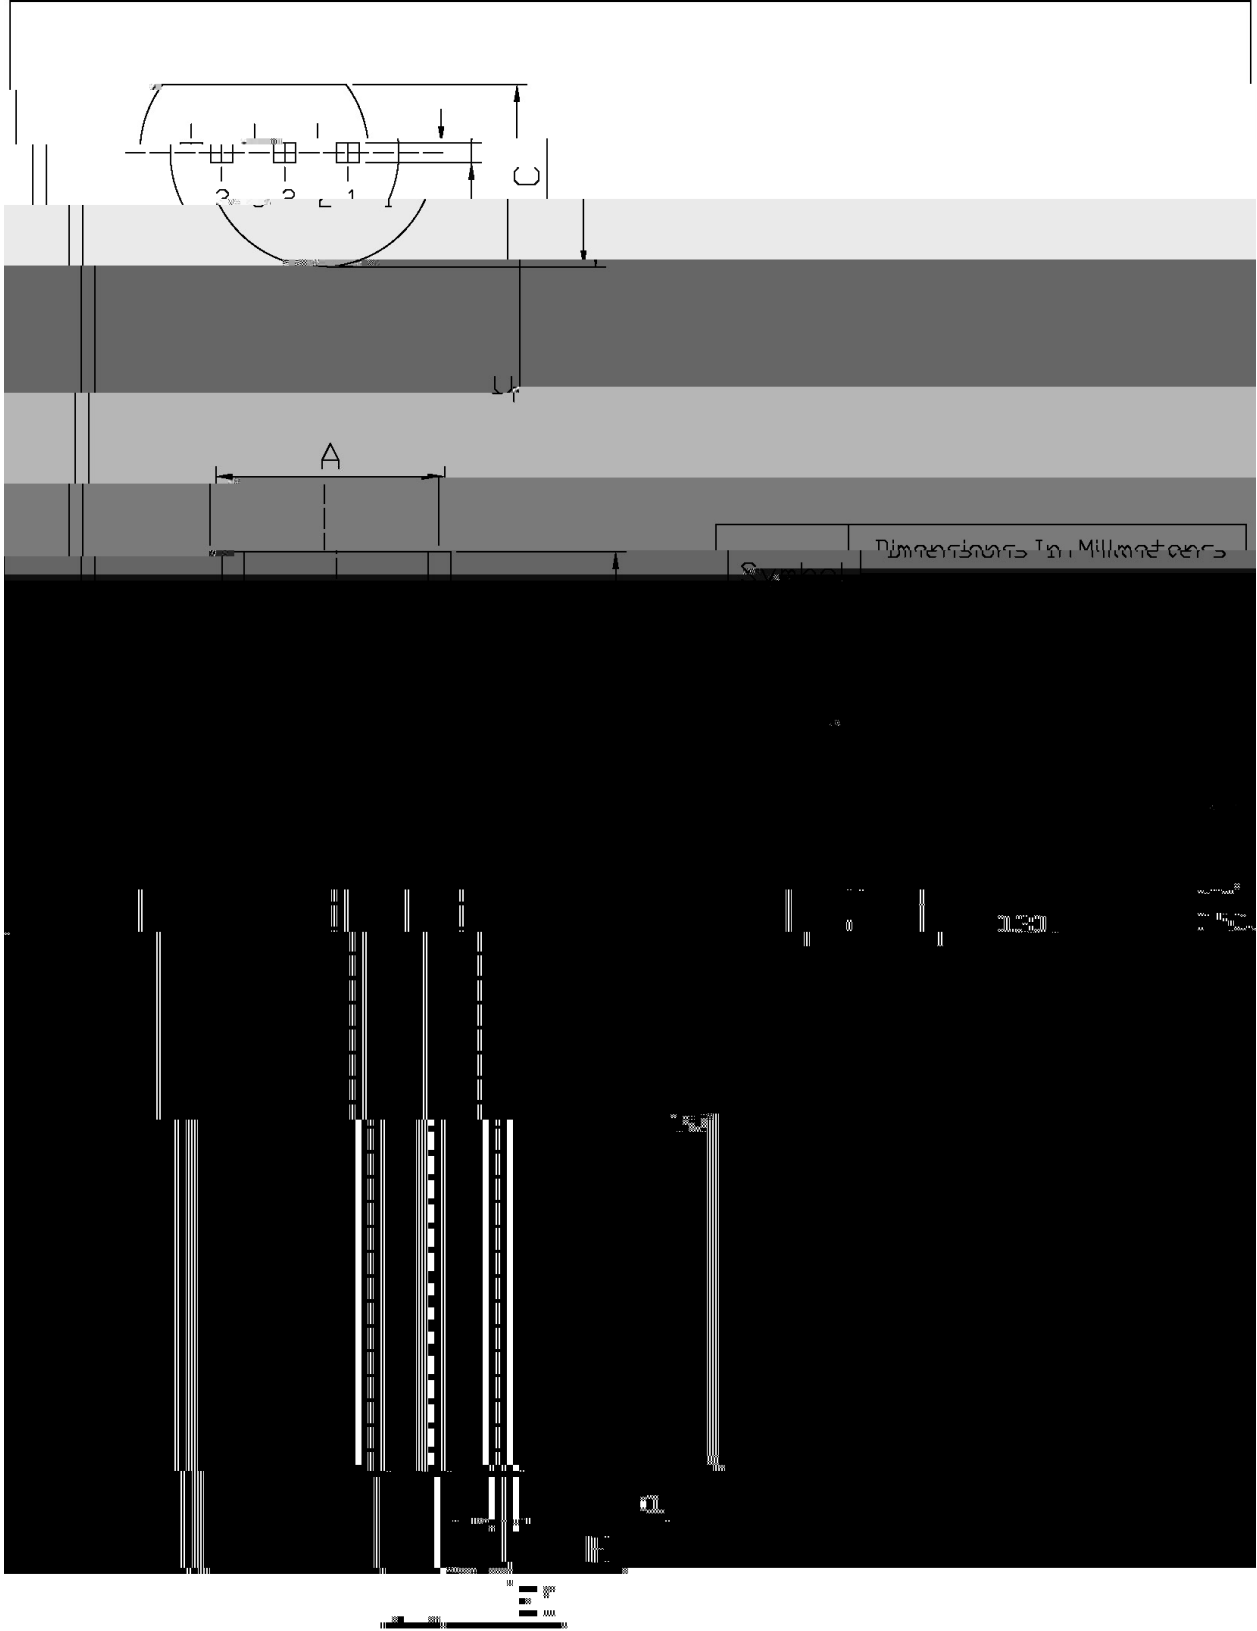

/ Marking Instructions

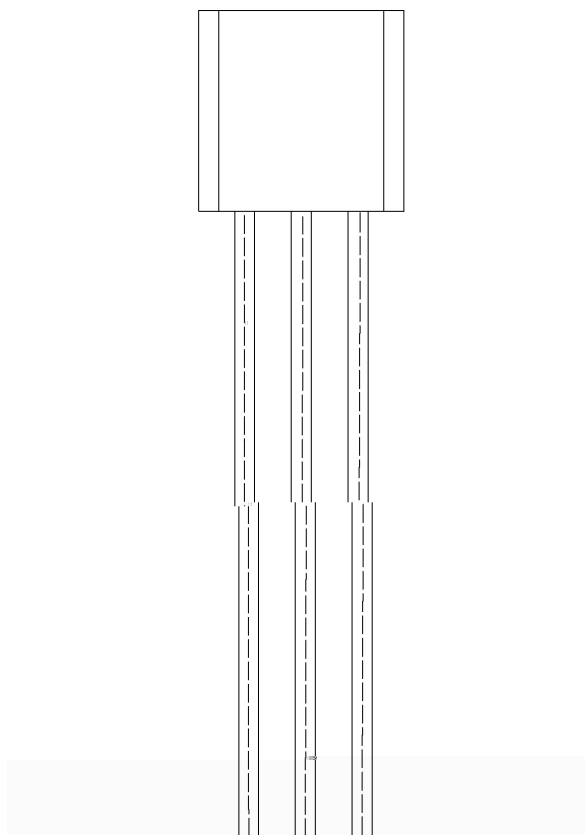

BR:

C3203

O:

h_{FE}

Note:

BR:

Company Code.

() / Temperature Profile for Dip Soldering(Pb-Free)



1	25	150	60	90sec;	Note:	1.Preheating:25~150 , Time:60~90sec.
2	255±5		5±0.5sec;		2.Peak Temp.:255±5 , Duration:5±0.5sec.	
3		2	10	/sec.	3. Cooling Speed: 2~10 /sec.	

/ Resistance to Soldering Heat Test Conditions

270±5	10±1 sec.	Temp:270±5	Time:10±1 sec
-------	-----------	------------	---------------

/ Packaging SPEC.

/ BULK

PackagD0.0.3(-5.7(700)Tj1s7 -1.71ons)7.3()J