




Parameter	Symbol	Rating	Unit
Collector to Base Voltage.			


**/ Electrical Characteristic Curve**

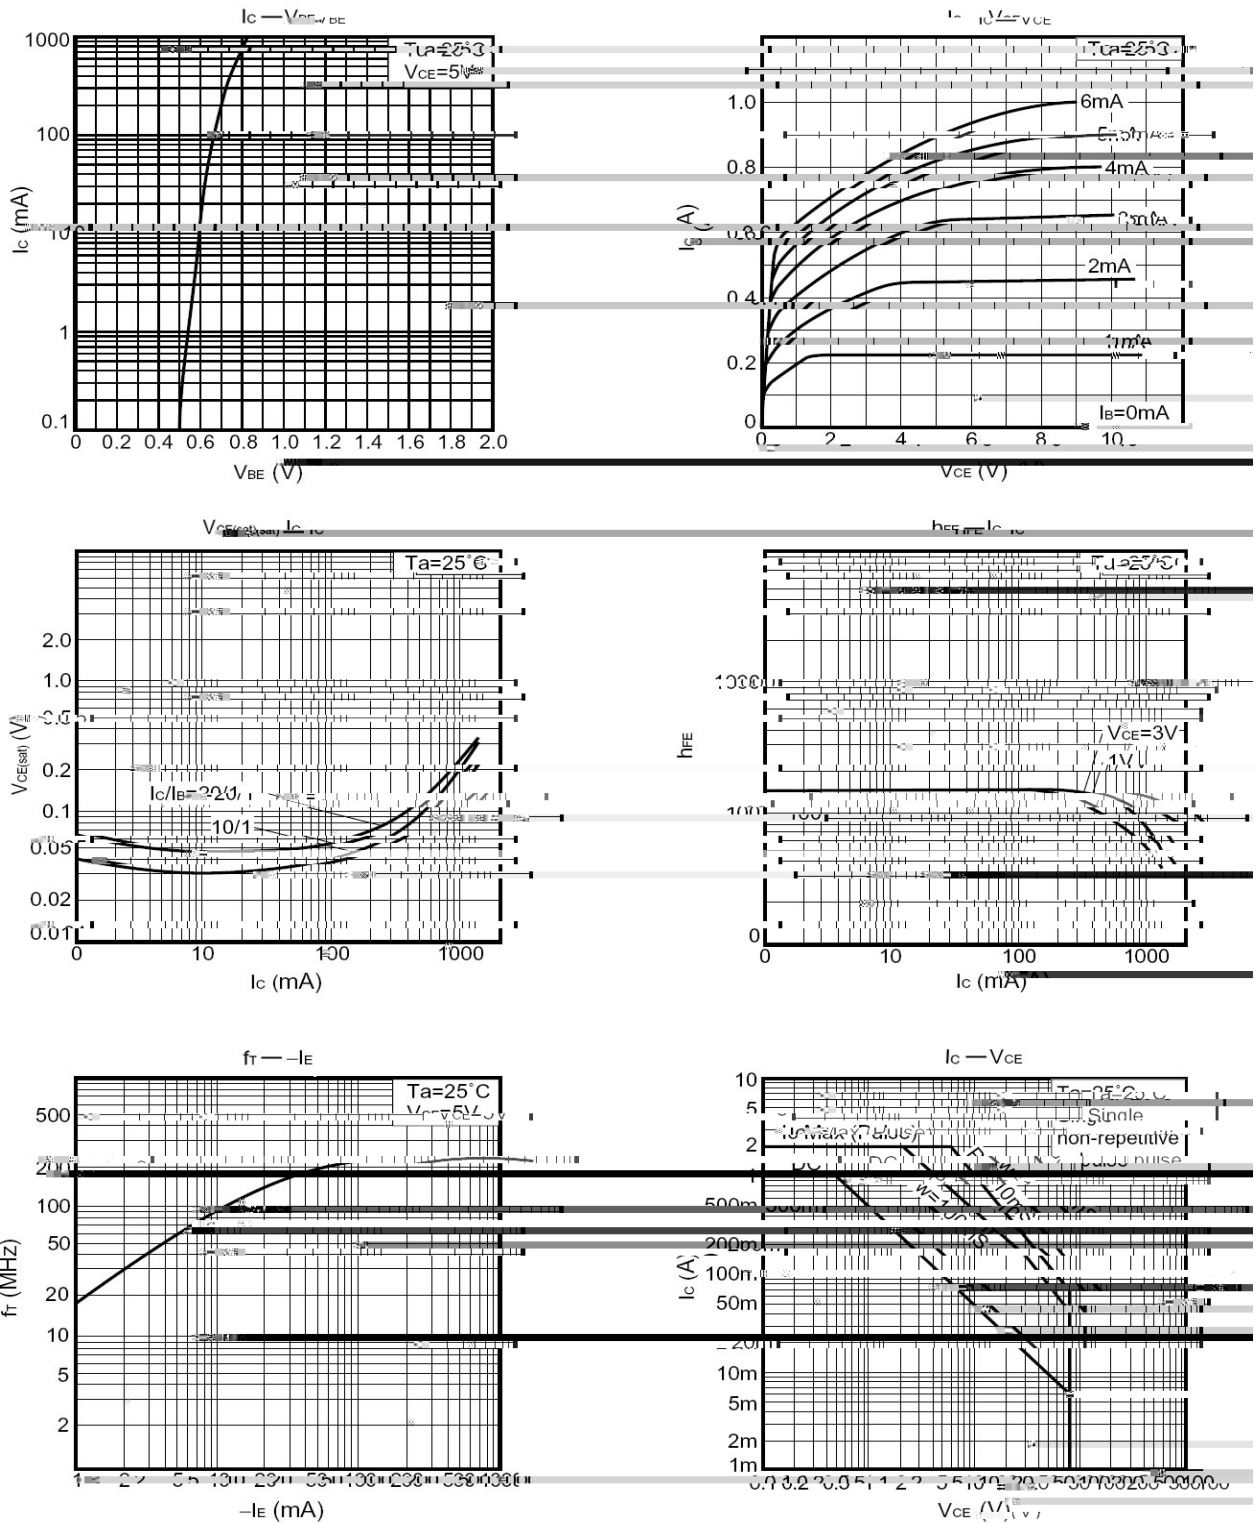

**/ Package Dimensions**

CSUT 1898


单位: mm

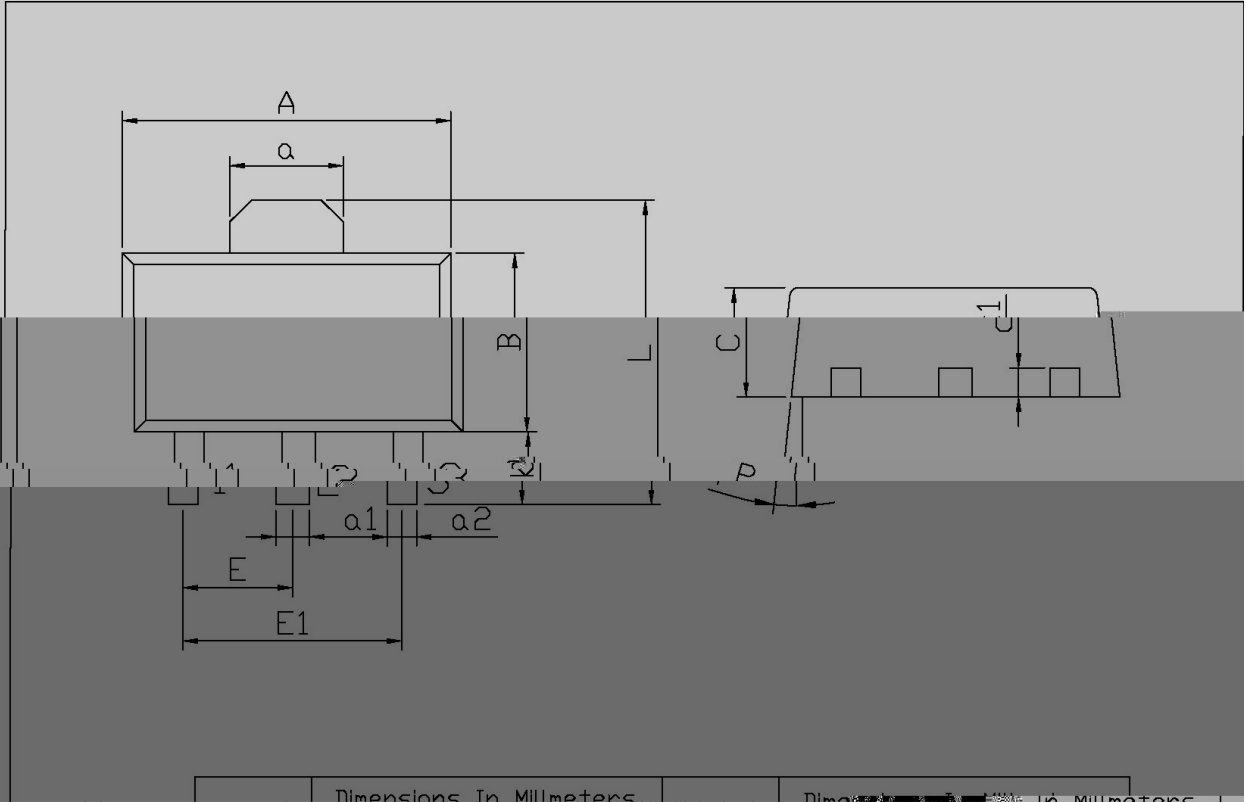

Dimensions in Millimeters

Symbol	Dimensions in Millimeters	Symbol	Dimensions in Millimeters
A	18.0	L	1.5
a	12.0	C	0.5
B	1.0	P	15°
E	1.0	E	1.0
E1	10.0	a1	2.5
a2	2.5	a2	2.5

/ Marking Instructions

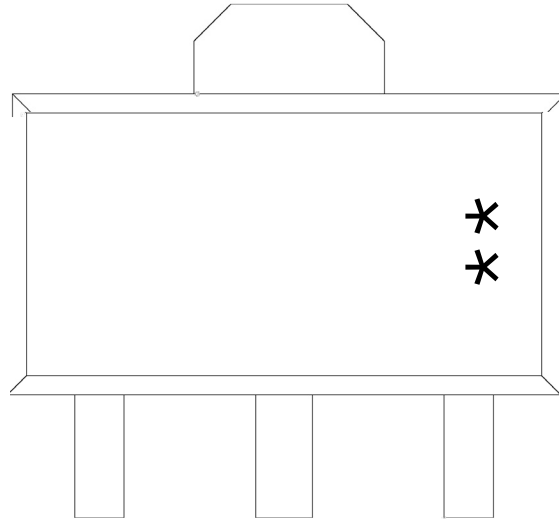

H

Z

O  $h_{FE}$

\*\*

Note:


H: Company Code.

Z: Product Type.

O  $h_{FE}$  Classifications Symbol

\*\* : Lot No. Code, code change with Lot No.

( ) / K\d g\iXk i\`Gif]`d`]fi`@`I`]\fn`Jfd` \i`e`^ZGY\$`i`\\z

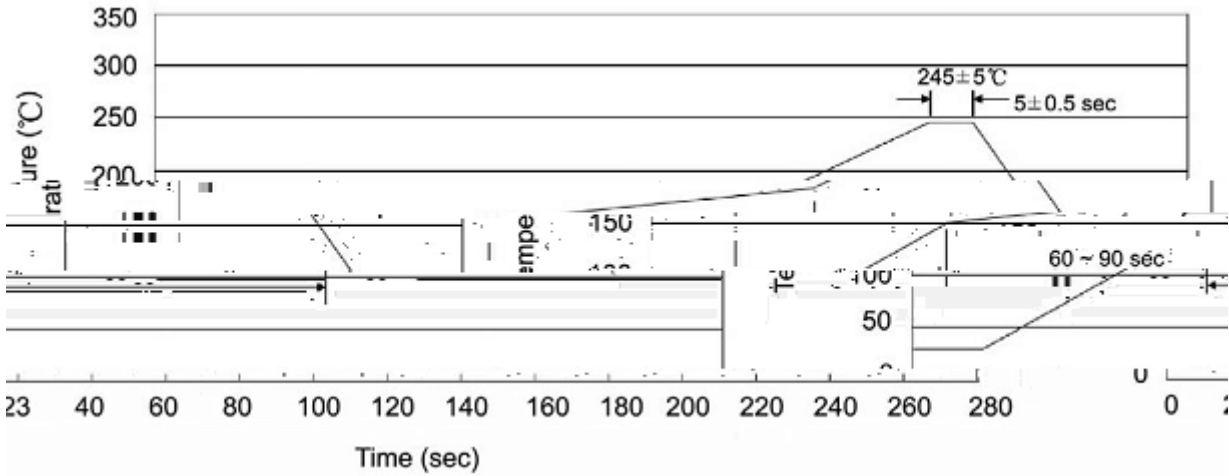

Note:

- |   |       |     |    |            |   |
|---|-------|-----|----|------------|---|
| 1 | 25    | 150 | 60 | 90sec;     | 1.Preheating:25~150 °C, Time:60~90sec.    |
| 2 | 245±5 |     |    | 5±0.5sec;  | 2.Peak Temp.:245±5 °C, Duration:5±0.5sec. |
| 3 |       |     | 2  | 10 °C/sec. | 3. Cooling Speed: 2~10 °C/sec.            |

/ Resistance to Soldering Heat Test Conditions

260±5                      10±1 sec.                      Temp.:260±5                      Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm <sup>3</sup> )		
	只卷盘	卷盘盒	只盒	盒箱	只箱	盒	箱	

/ Notices