


Rev.F May.-2016

TO-263

Schottky Diode in a TO-263 Plastic Package.

High Forward Surge Capability, Ultra Low Forward Voltage Drop, Excellent High Temperature Stability.

For use in low voltage,high frequency inverters, free wheeling, and polarity protection applications.



PIN1 Anode

PIN 2,4 Cathode

PIN 3 Anode

See Marking Instructions.

Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RM} V_{RSM} V_{DC}	100	V
RMS Reverse Voltage	V_{RMS}	70	V
Average forward rectified current	$I_{F(AV)}$	1×10	A
Non Repetitive Peak Surge Current	I_{FSM}	200	A
Thermal Resistance Junction to Case	R_{Jc}	2.8	/W
Junction and Storage Temperature Range	T_j T_{stg}	-55 +150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse Voltage	$V_{(BR)R}$	$I_R=1mA(T_a=25^\circ C)$	100			V
Forward Voltage	V_F	$I_F=2A(T_a=25^\circ C)$		0.41	0.45	V
		$I_F=10A(T_a=25^\circ C)$		0.58	0.65	V
		$I_F=2A(T_a=125^\circ C)$		0.31	0.40	V
		$I_F=10A(T_a=125^\circ C)$		0.55	0.65	V
Instantaneous Reverse Current	I_R Note 1	$V_R=100V(T_a=25^\circ C)$			150	A
		$V_R=100V(T_a=125^\circ C)$			25	mA






/Notes


1.

Short duration pulse test used to minimize self-heating effect.

2.

Unless otherwise noted, values for the parameters of a single chip

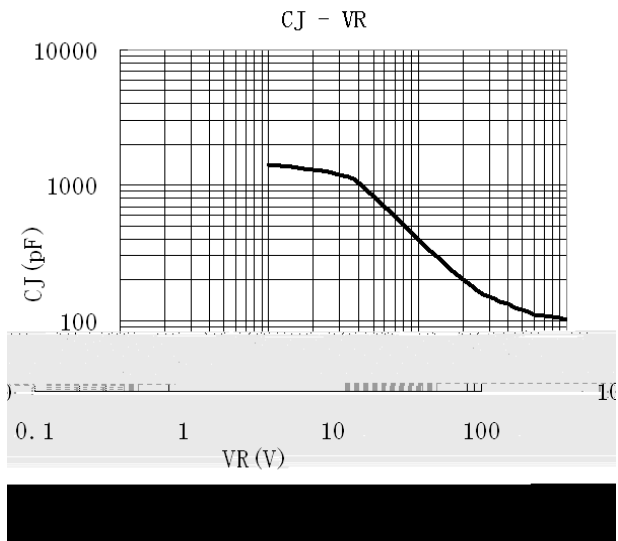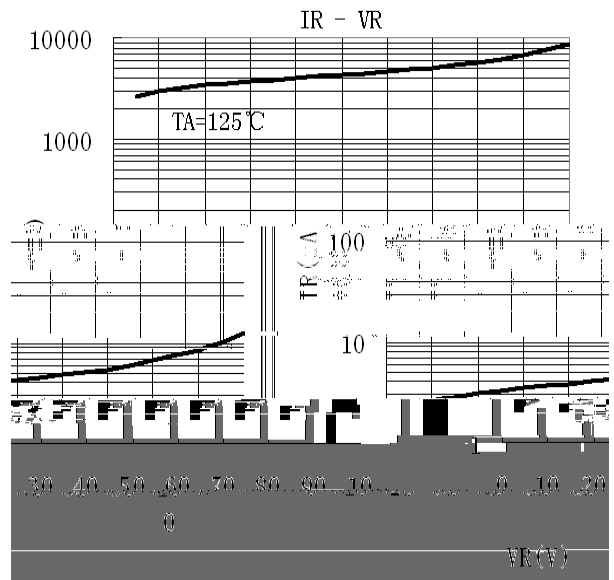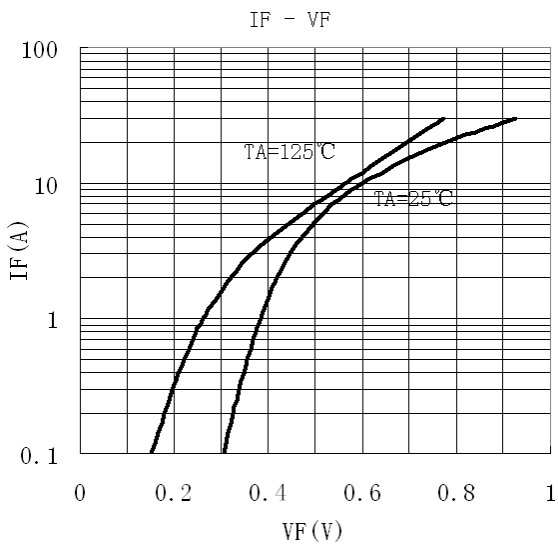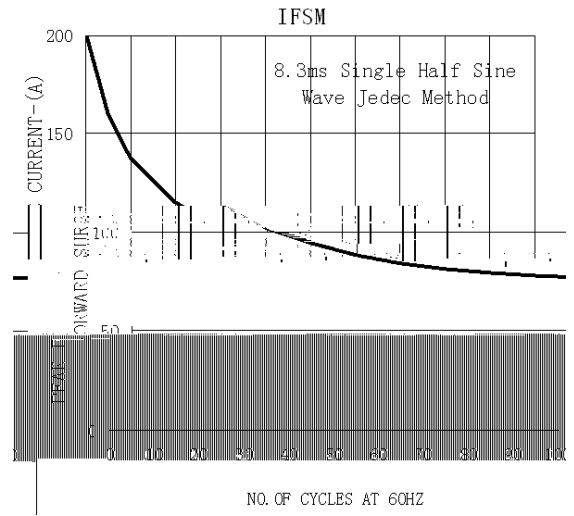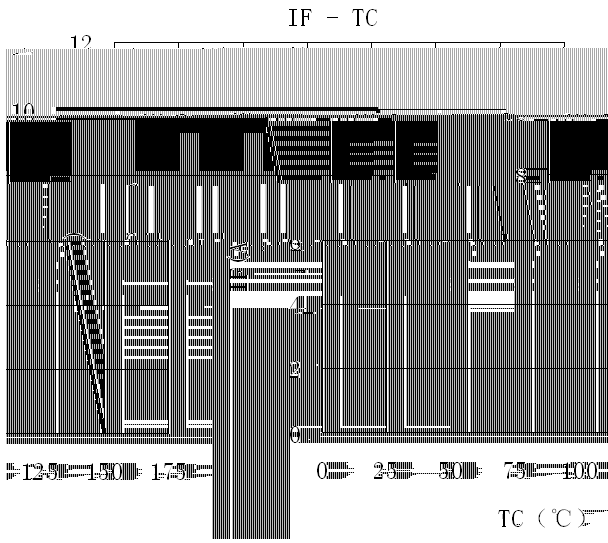

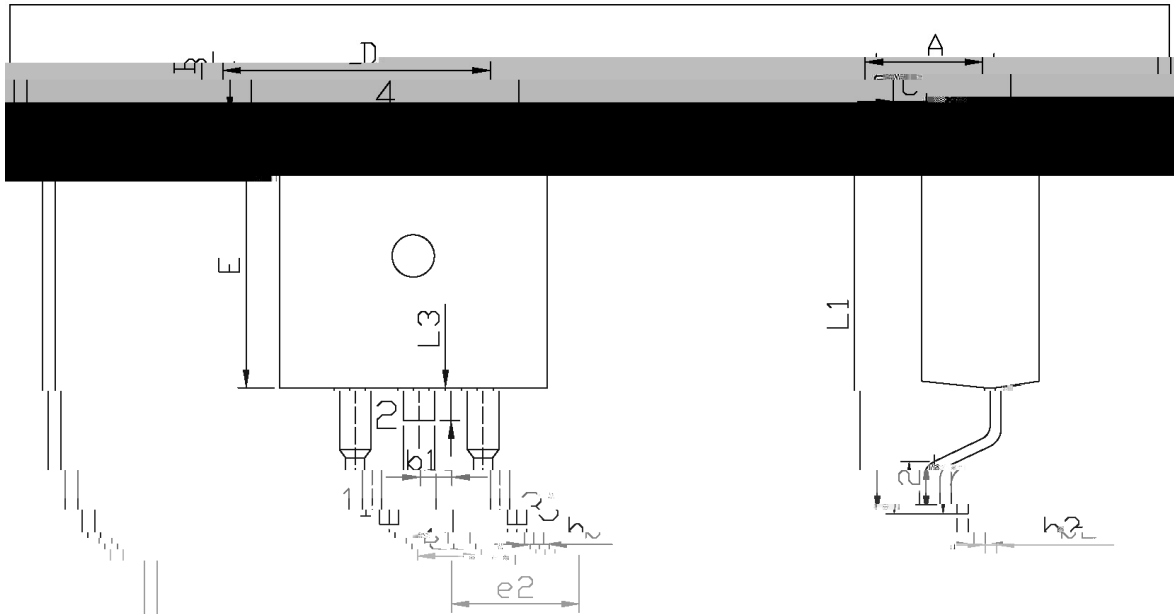

单位: m

Max	Min	Max	Min
4.70	4.30	A	4.30
2.74	1.00	B	1.00
0.90	0.90	e1	0.90

