

# MBR1060CT


## / Descriptions

TO-220


## / Features

## / Applications

## / Equivalent Circuit



## / Pinning



## / h<sub>FE</sub> Classifications & Marking

**MBR1060CT**

/ Electrical Characteristic Curve



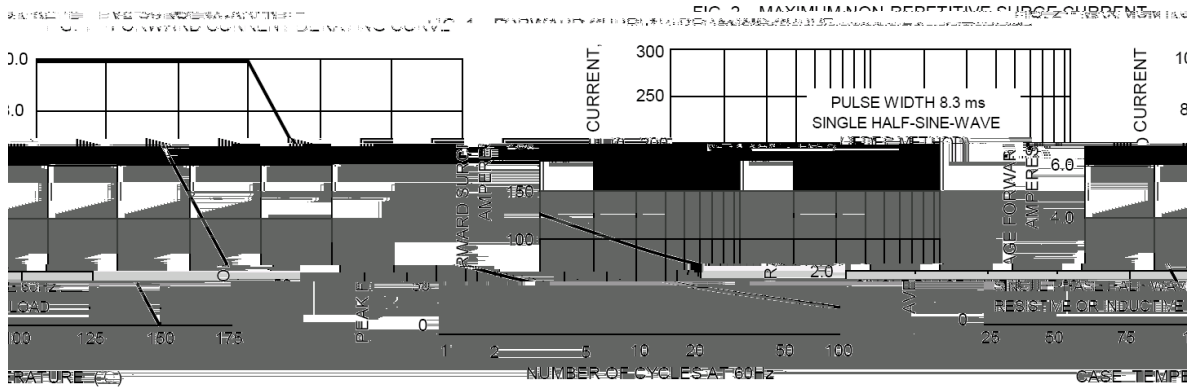



FIG. 4 - TYPICAL FORWARD CHARACTERISTICS

FIG. 3 - TYPICAL REVERSE CHARACTERISTICS


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

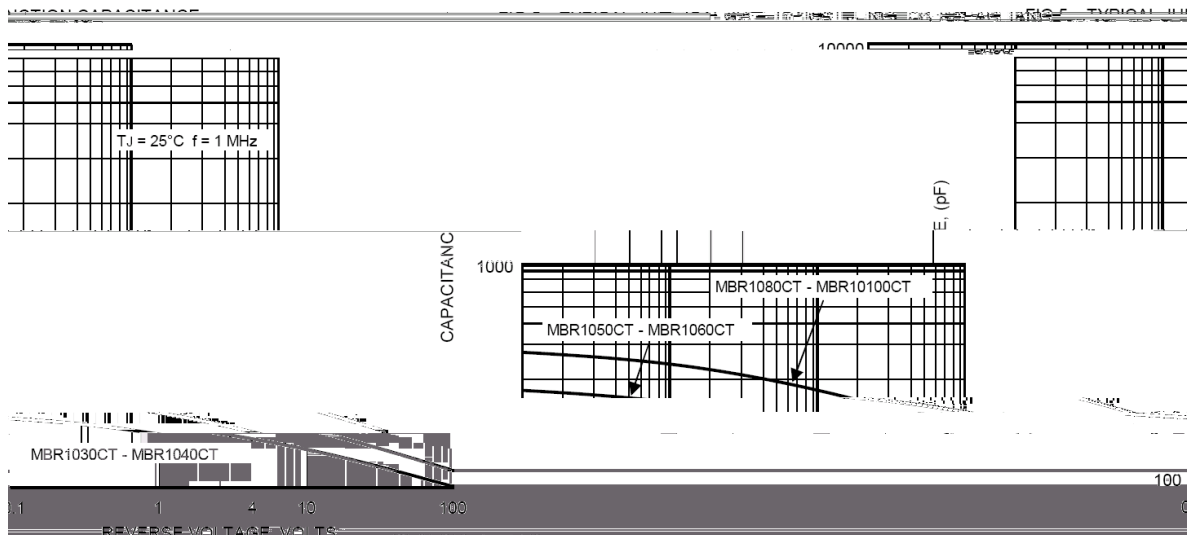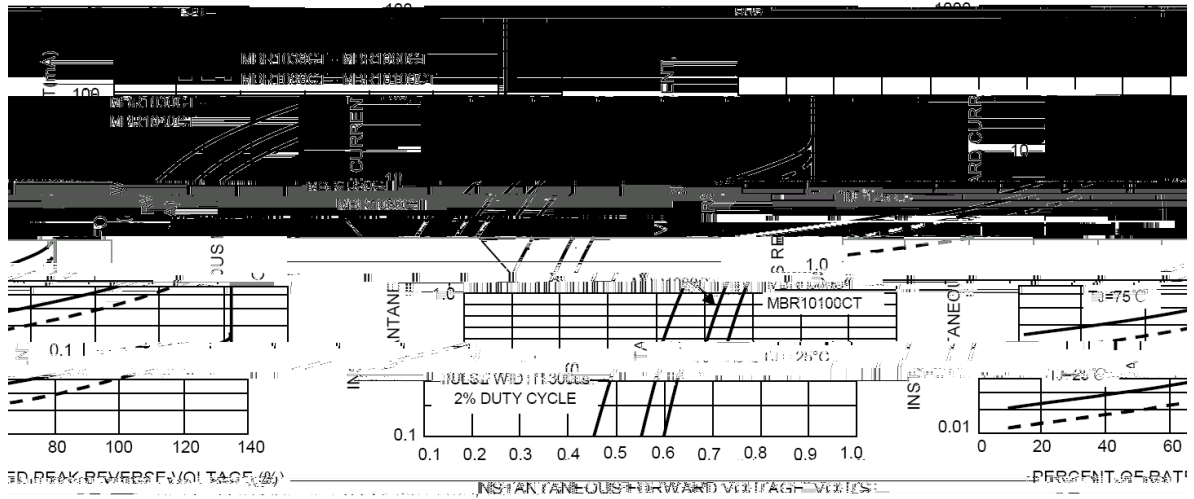

/ Package Dimensions

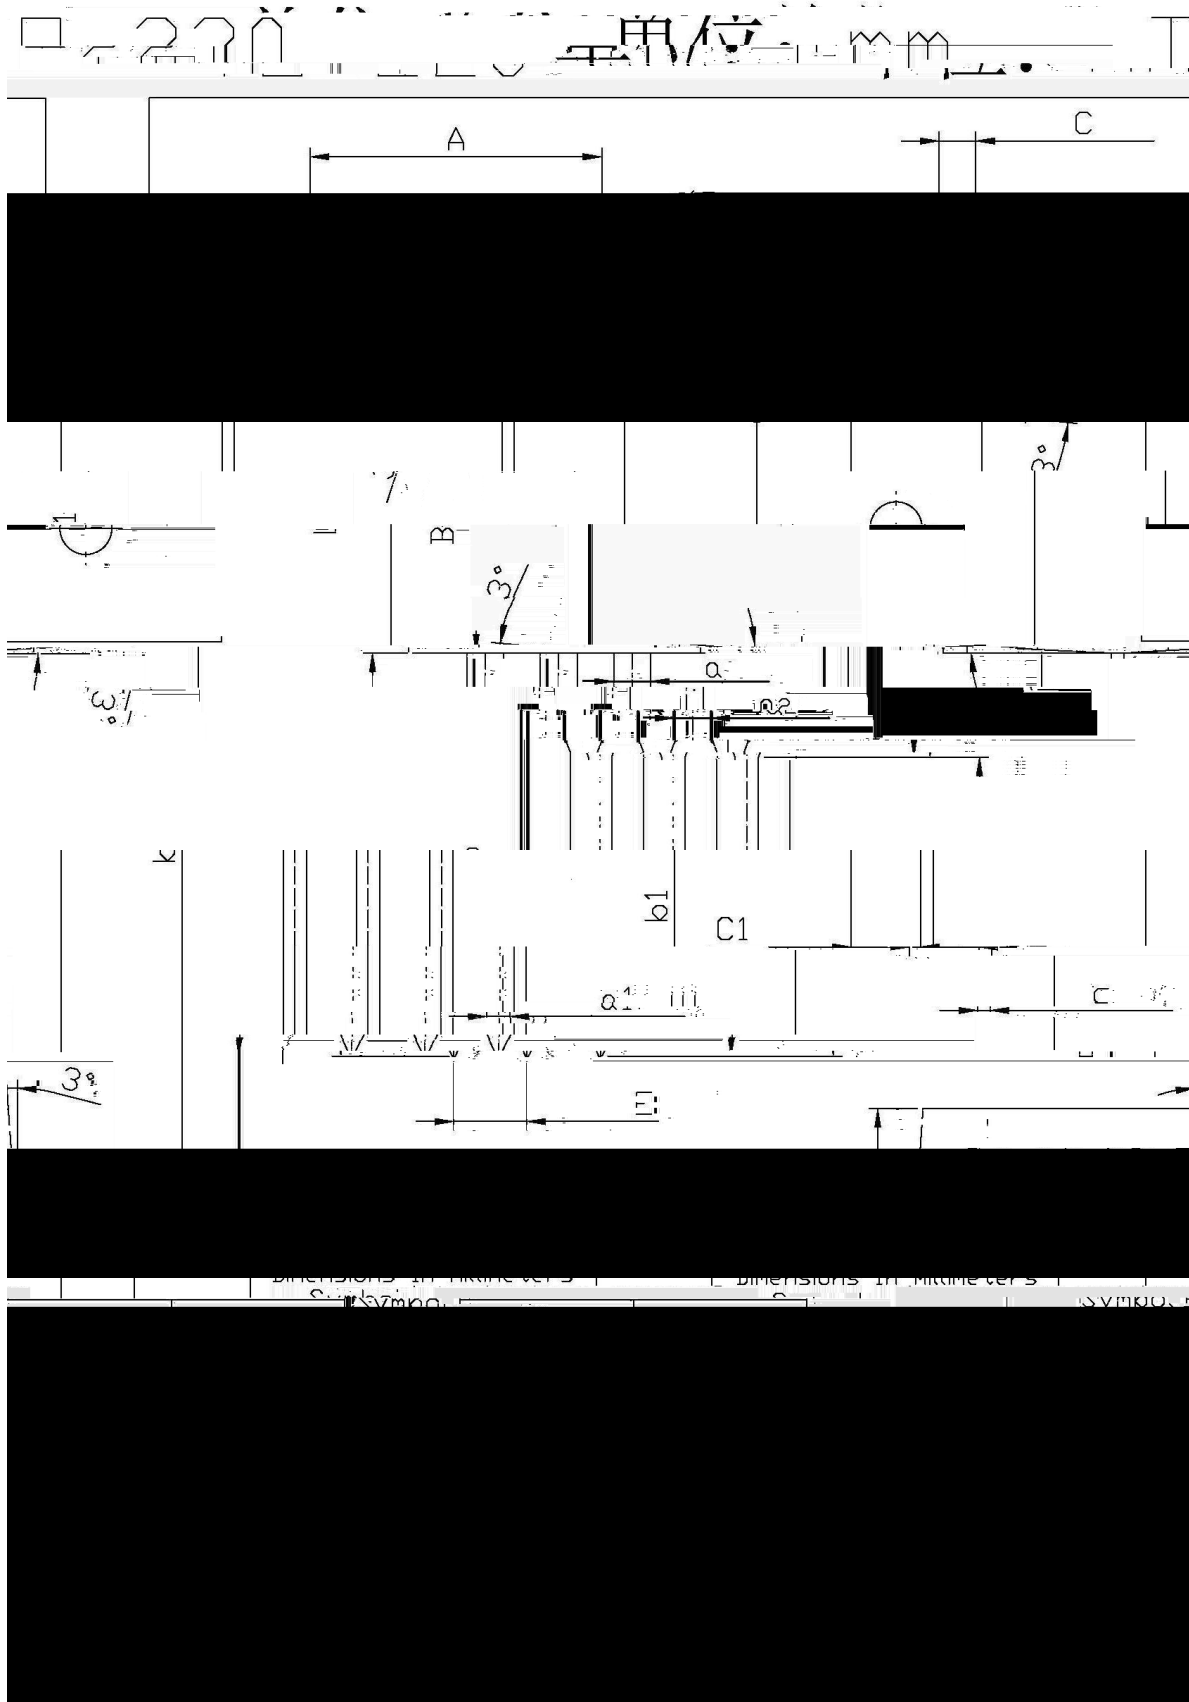


/ Marking Instructions

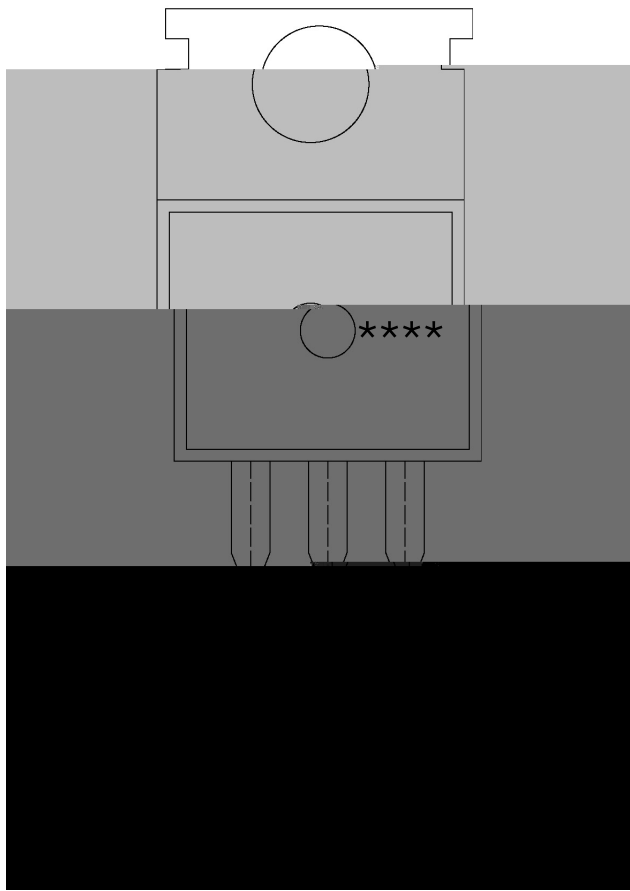

BR  
MBR1060  
CT:  
\*\*\*\*

( ) / Temperature Profile for Dip Soldering(Pb-Free)

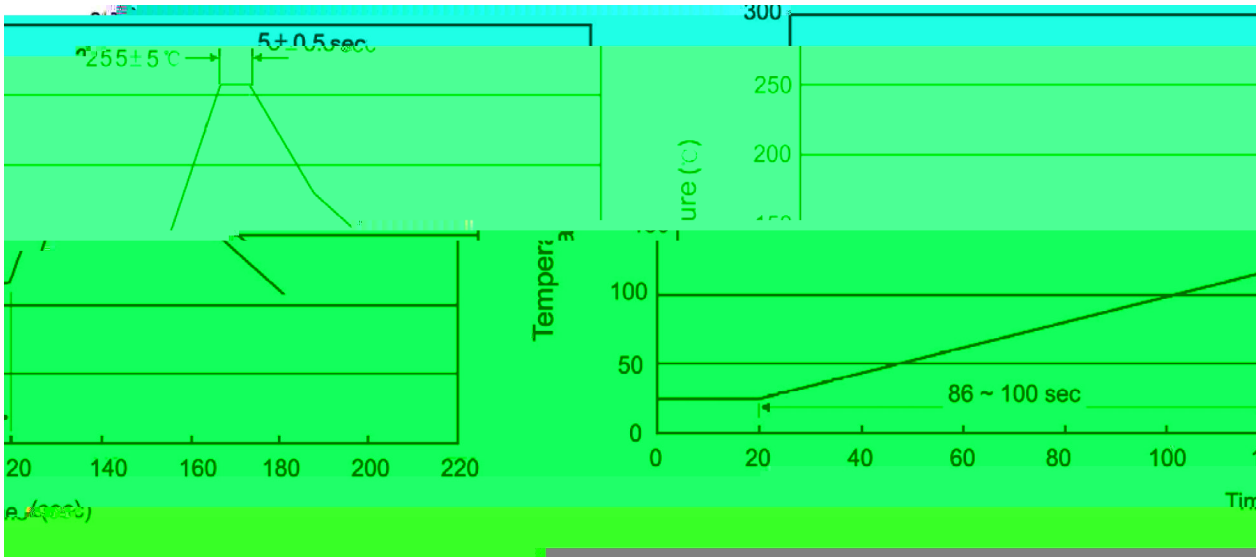

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

						Bag	Inner Box	Outer Box
	Units/Bag	Bags/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box			
TO-220/F	200	10	2,000	5	10,000			