

MBR140TZP

Rev.B Jul.-2023

DFN1006-2L

DFN1006-2L Plastic Package Schottky Barrier Rectifiers.

Ultra small package, Low positive pressure drop, can ignore the reverse recovery time, HF Product.

General purpose.



PIN1:Anode Ultra1 Tf0 -4.1 42.72 i /Im3 Do05.42 -44 Tw8.064.65(Do05.42 mh5m(78Do05.42 -446 Tw8


/ Absolute Maximum Ratings($T_a=25$)

Parameter	Symbol	Rating	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	40	V
Maximum RMS voltage	V_{RMS}	28	V
Maximum DC Blocking Voltage	V_{DC}	40	V
Maximum Average Forward Rectified Current $T_c=100$	$I_{F\ AV}$	1	A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	5	A
Operating and Storage Temperature Range	T_J, T_{stg}	-55~+125	


/ Electrical Characteristics($T_a=25$)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Maximum Instantaneous Forward Voltage	V_F	$I_F=1A$			0.61	V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	$T_a=25$			20	μA
		$T_a=100$			500	μA

/ Electrical Characteristic Curve

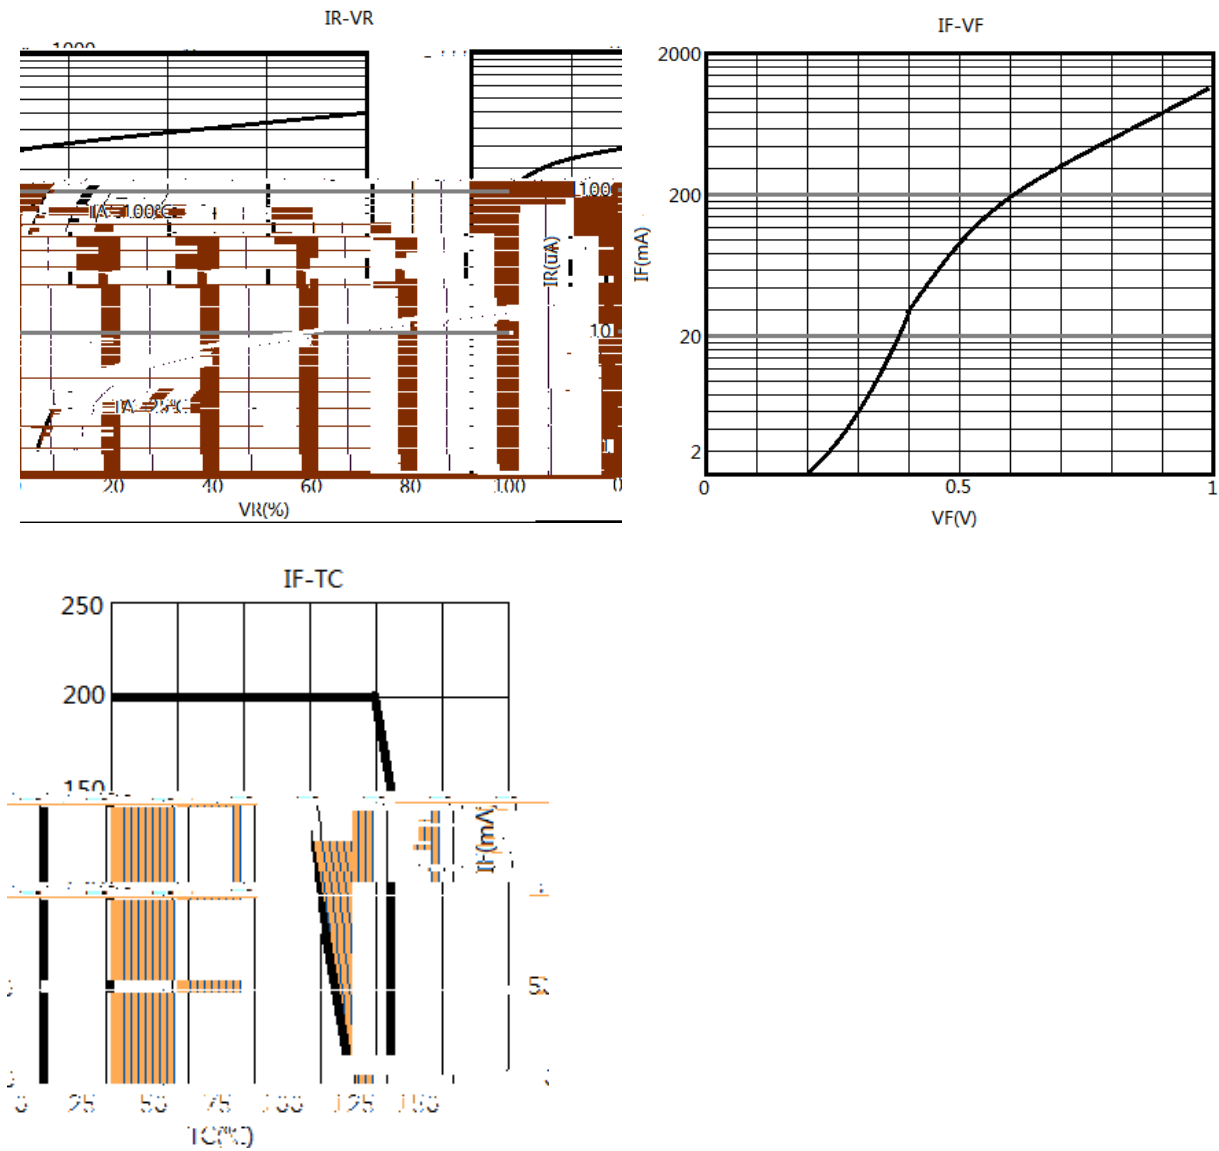

/ Package Dimensions

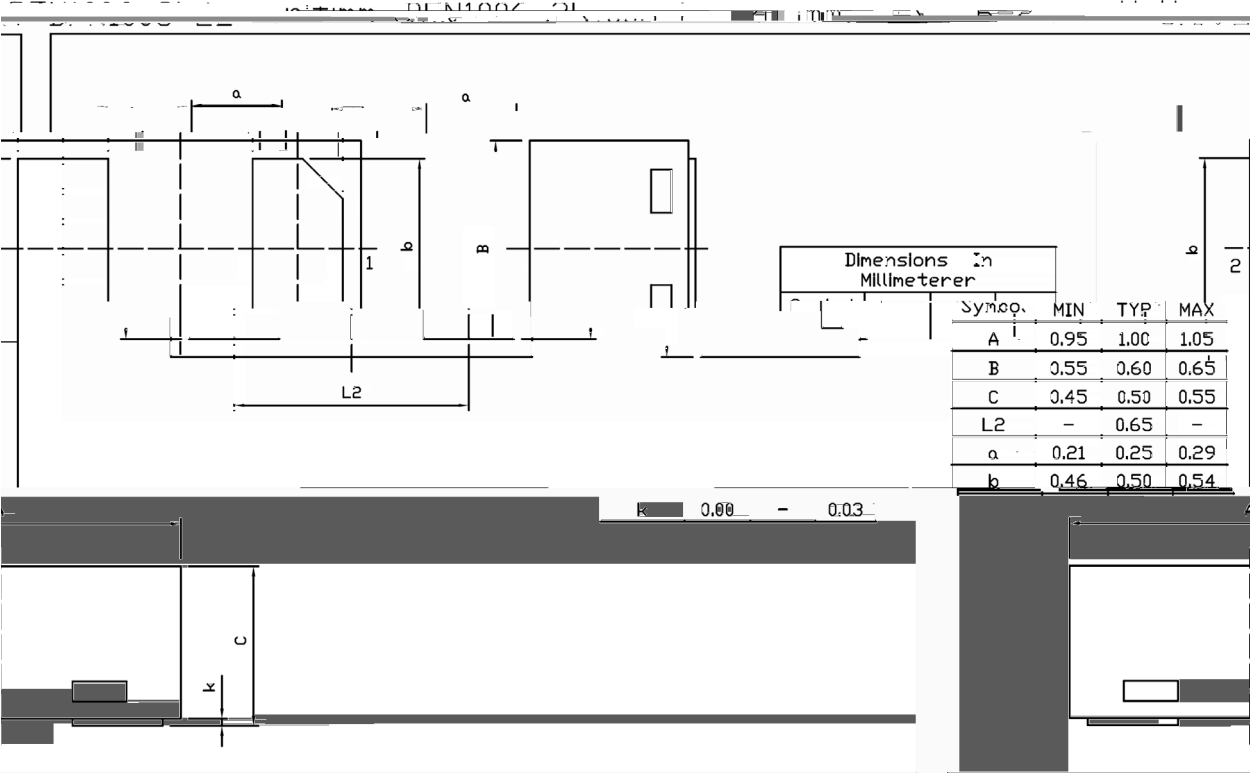

Rev.01. 202108

/ Marking Instructions



H

AA

Note

H: Company Code

AA Product Type

MBR140TZP
Rev.B Jul.-2023