

**/ Descriptions**

Silicon PNP transistor in a SOT-323 Plastic Package.


**/ Features**

High voltage, low saturation voltage, low collector output capacitance , complementary pair with MMBTA42W.

**/ Applications**

High voltage control circuit.

**/ Equivalent Circuit**



**/ Pinning**






PIN1 Emitter      PIN 2 Base      PIN 3 Collector

**/ Marking**


Marking	H2D
---------	-----




/ Electrical Characteristic Curve

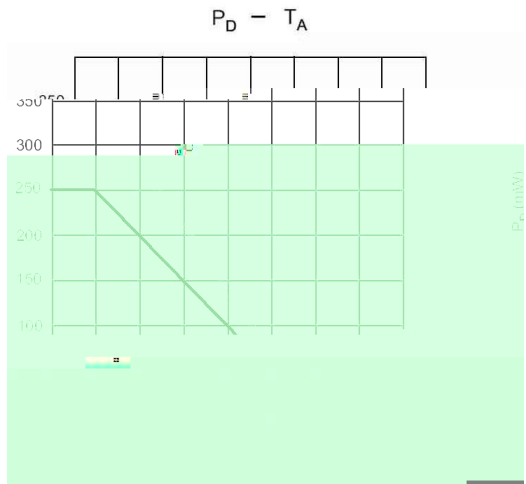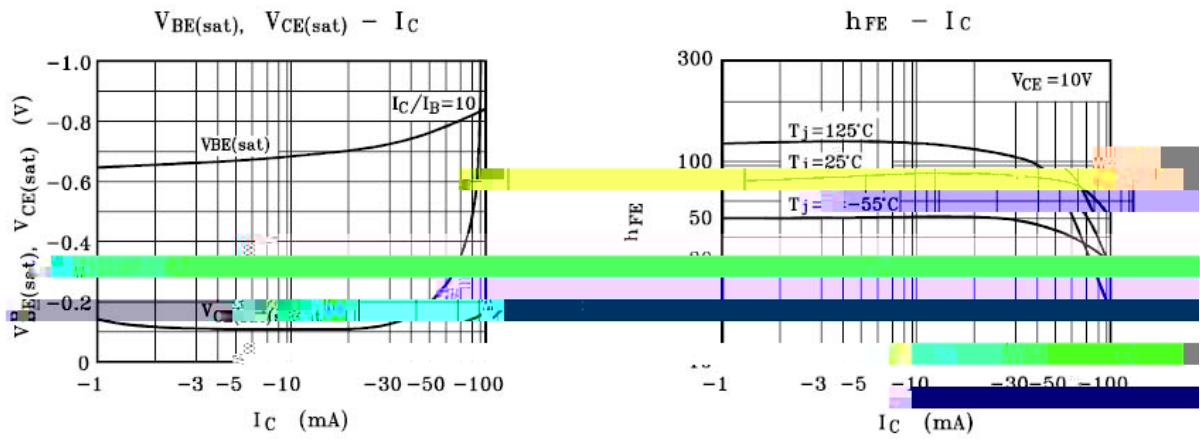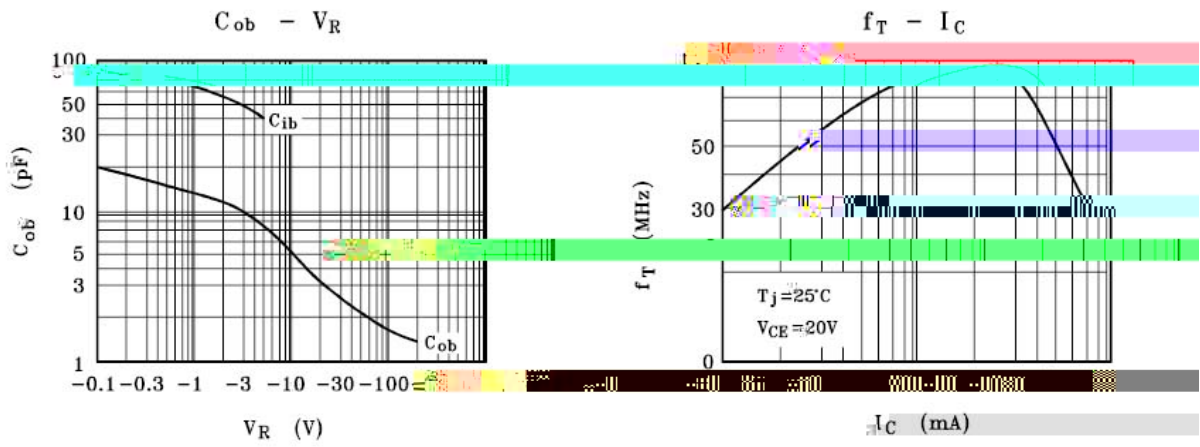

/ Package Dimensions

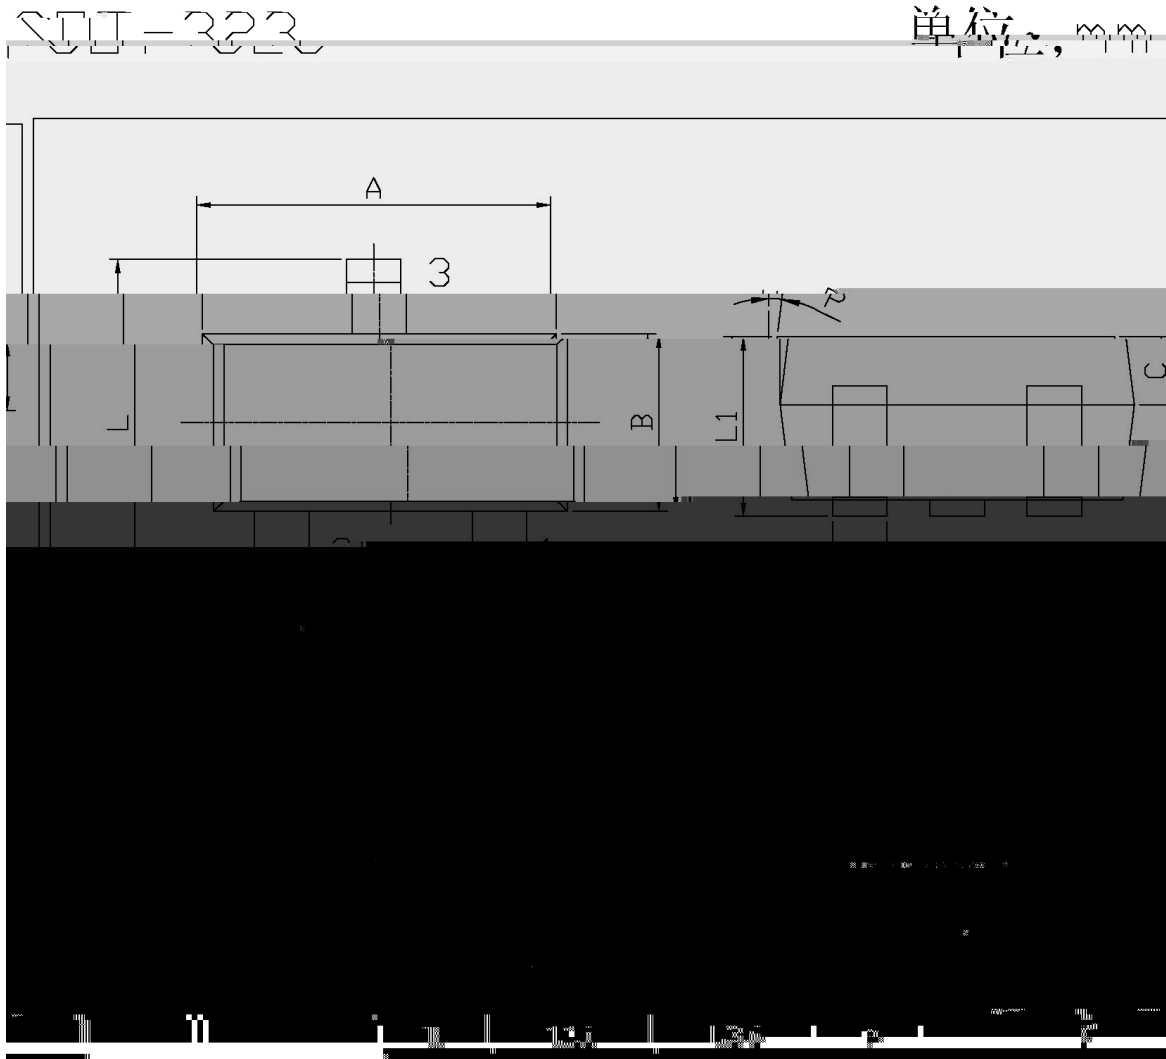


/ Marking Instructions

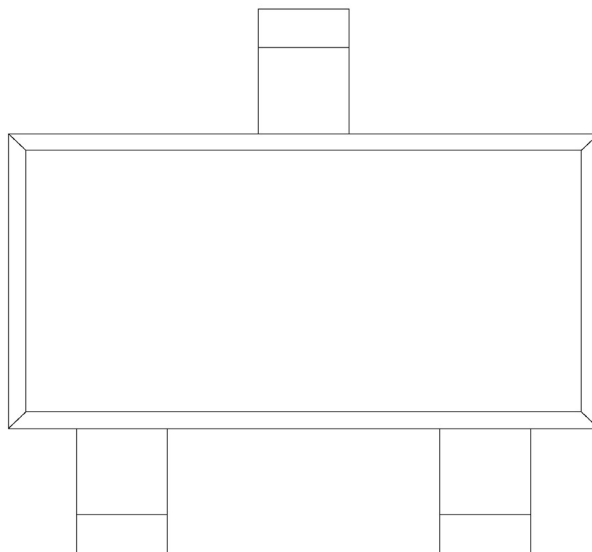

H

HqZE°@qx@ER&wRWT làª z

( ) / K\ d g\ iXk i\ \Gif] \d ]fi @ ' I \]fn Jfd \i e^ ŽGY\$=i\ž

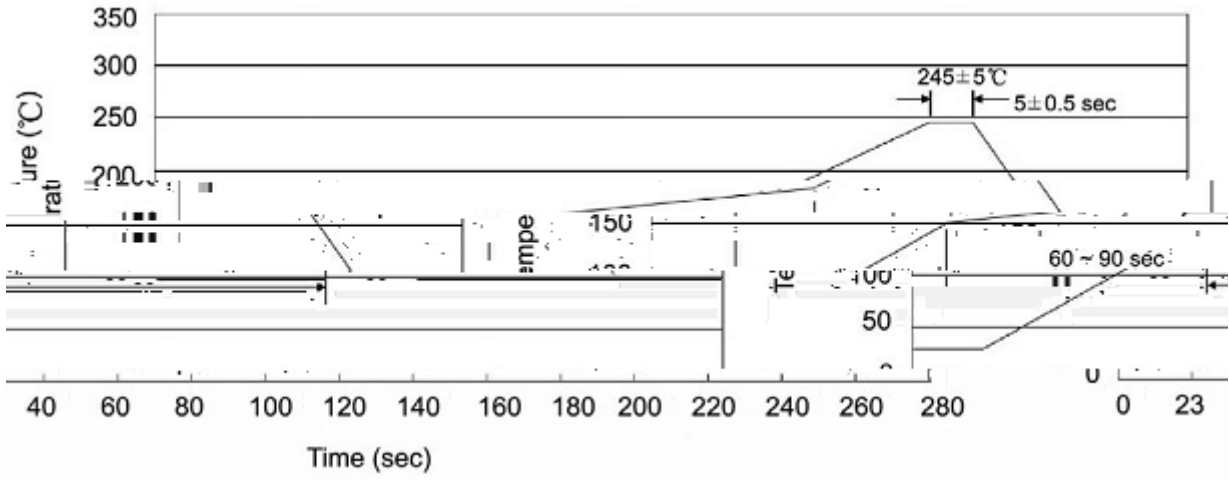

Note:

- 1            25   150            60   90sec;
- 2

1.Preheating:25~150 , Time:60~90sec.