

**MUR1640CT**

**DATA SHEET**






**/ Absolute Maximum Ratings(Ta=25 )**

		×	

**/ Electrical Characteristics(Ta=25 )**


( %


/ Electrical Characteristic Curve

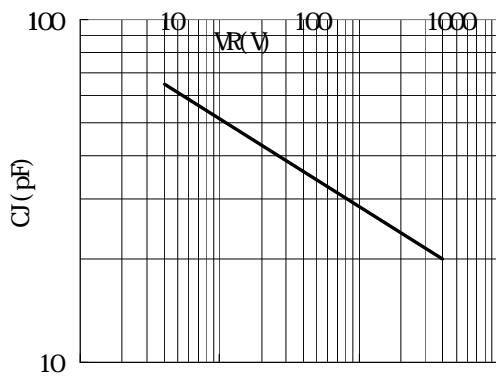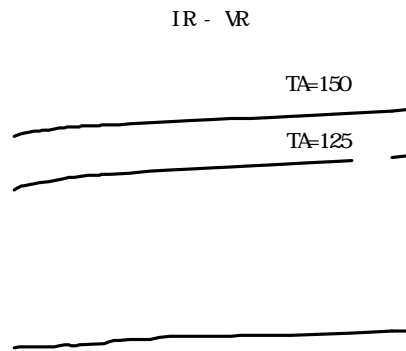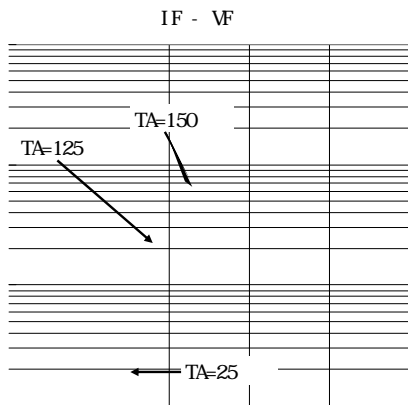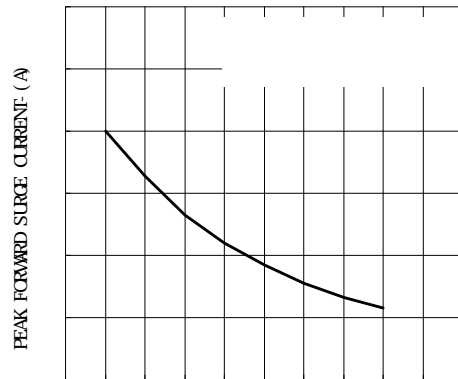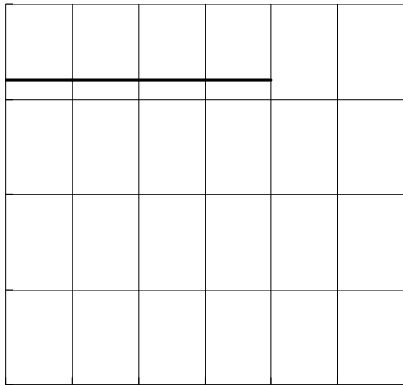

**MUR1640CT**

**DATA SHEET**

/ Marking Instructions

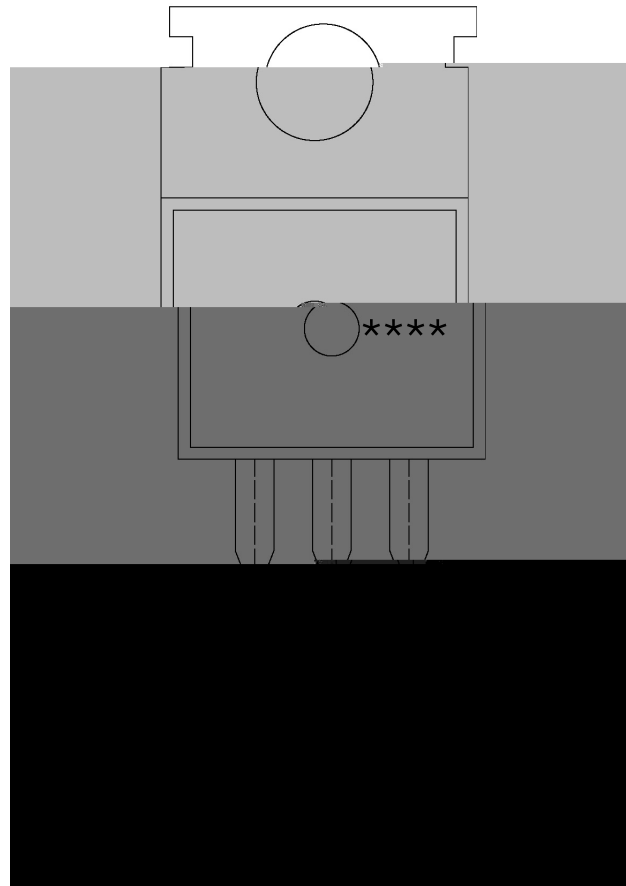

ML R(64'


CK:

\*\*\*\*

ML R(64'

CK

( ) / Temperature Profile for Dip Soldering(Pb-Free)

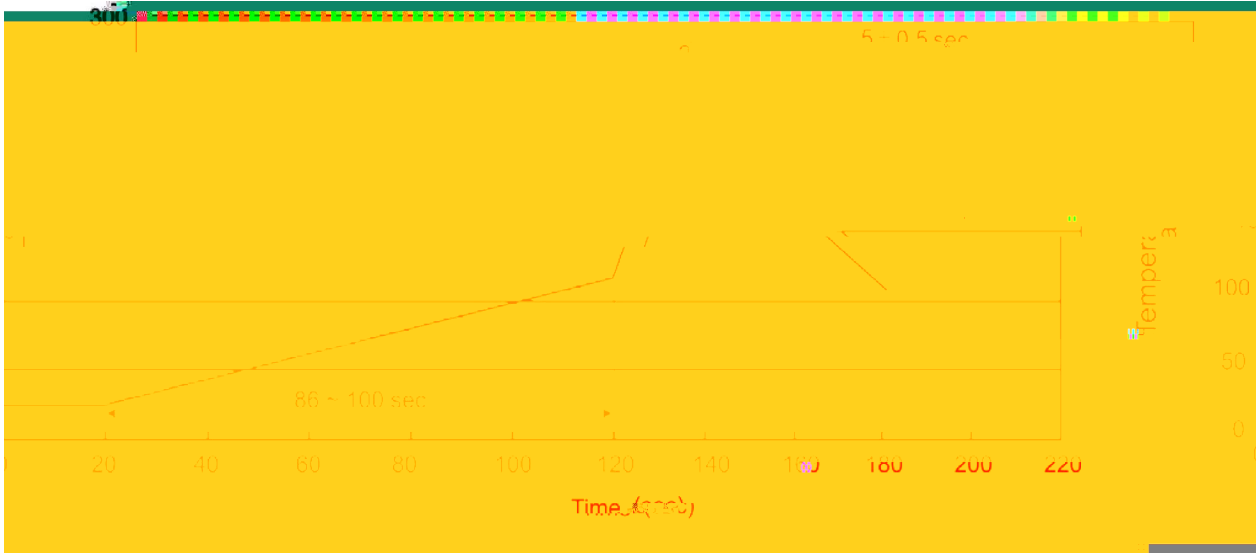

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

						Bag	Inner Box	Outer Box
	Units/Bag	Bags/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box			
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

						Tube	Inner Box	Outer Box
	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box			
TO-220/F	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

/ Notices