

# **MURF2020CT**

Rev.F Mar.-2016

**DATA SHEET**


# MURF2020CT

Rev.F Mar.-2016

Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage	$V_{RRM}$	200	V
RMS Voltage	$V_{RMS}$	140	V
DC Blocking Voltage	$V_{DC}$	200	V
Average Forward Current	$I_F$	2× 10	A
Non Repetitive Peak Surge Current	$I_{FSM}$	120	A
Thermal Resistance Junction to Case	$R_{JC}$	3.3	/W
Operating Junction Temperature	$T_j$	150	
Storage Temperature Range	$T_{stg}$	-55 150	




/ Package Dimensions

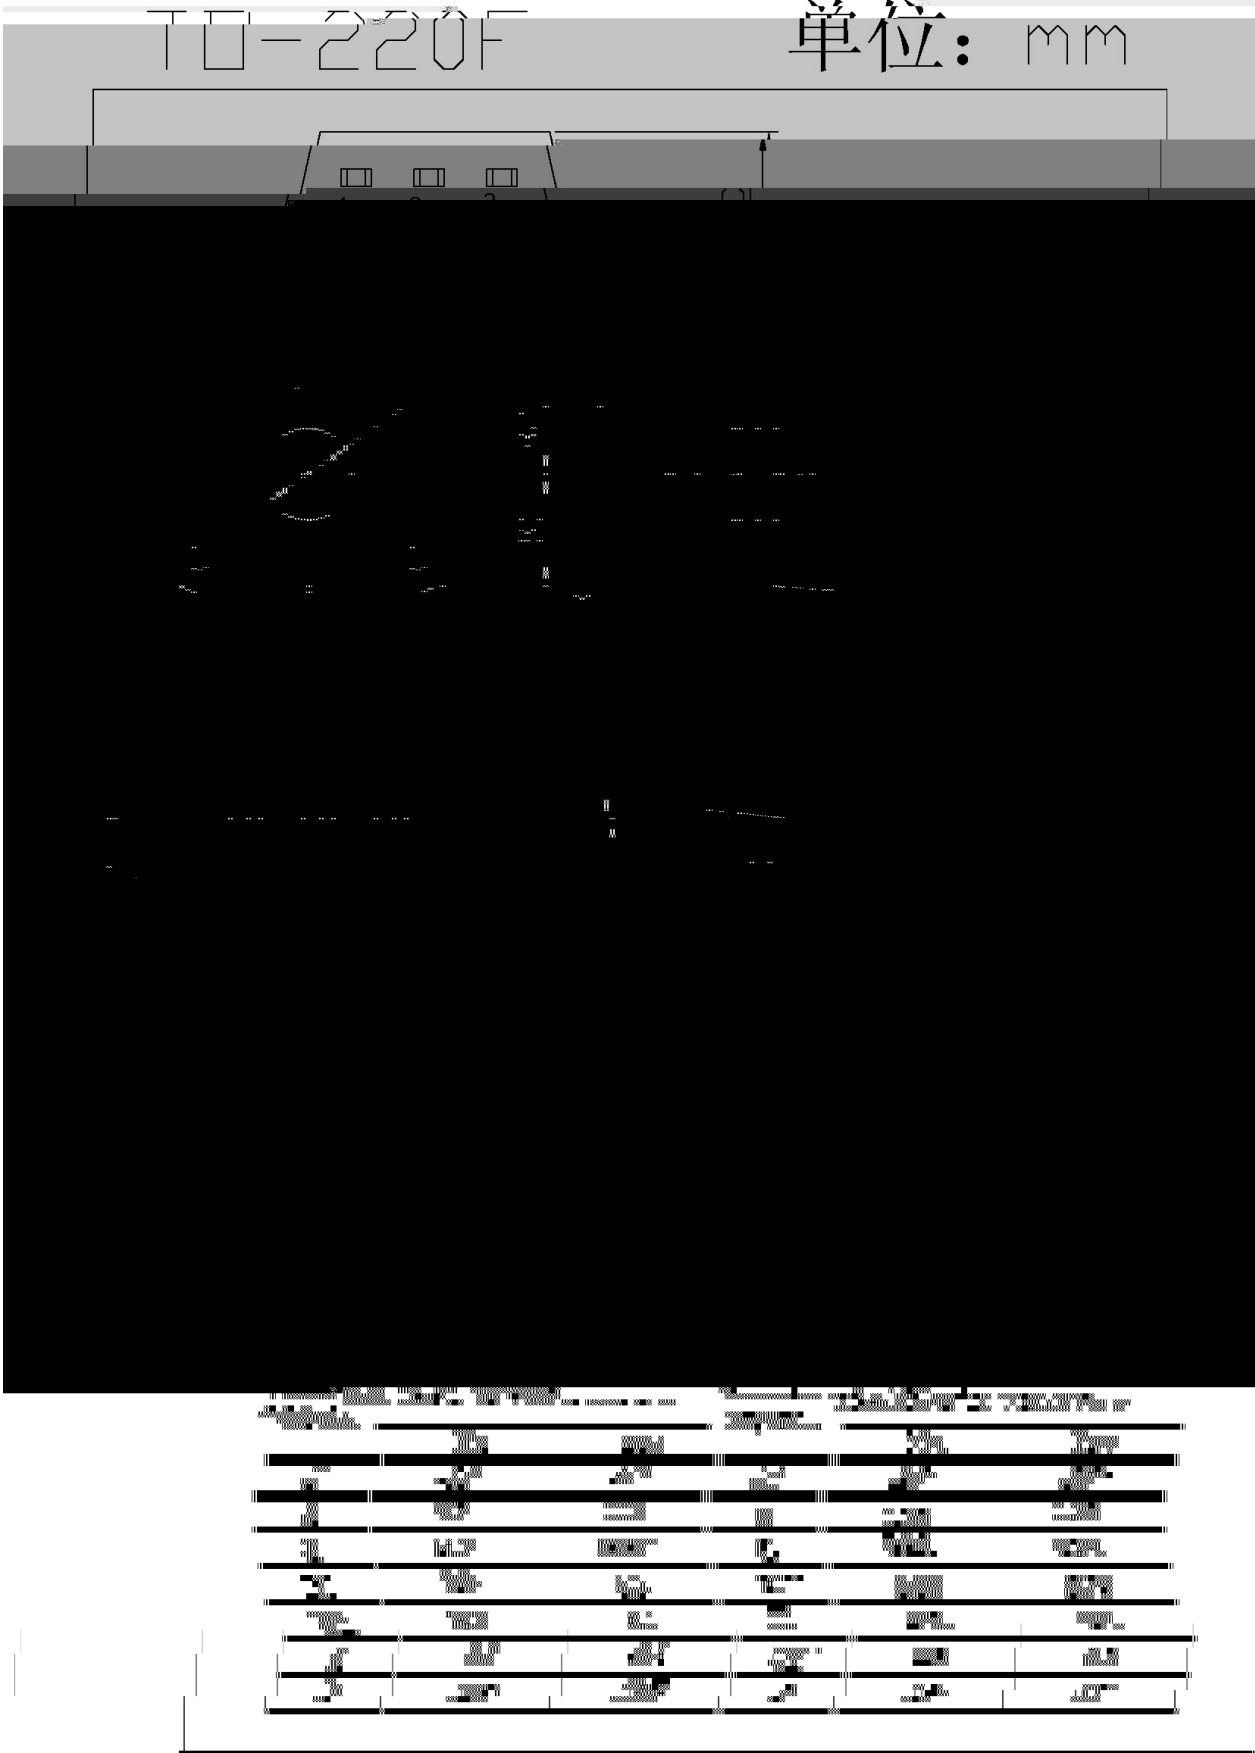

# MURF2020CT

Rev.F Mar.-2016

## / Marking Instructions

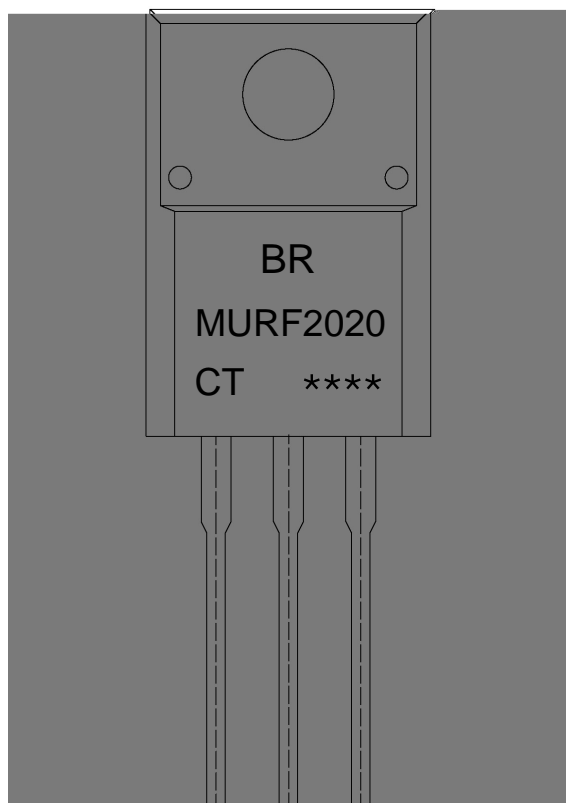

BR

MURF2020

CT:

\*\*\*\*

Note:

BR: Company Code

MURF2020: Product Type.

CT: Internal Structure

\*\*\*\*: Lot No. Code, code change with Lot No.

# **MURF2020CT**

Rev.F Mar.-2016

**DATA SHEET**