



**P4SMAFJ8.5A~P4SMAFJ170A**  
Rev.F May.-2019



# P4SMAFJ8.5A~P4SMAFJ170A

Rev.F May.-2019



DATA SHEET

## / Electrical Characteristics(Ta=25 )

Type	Marking	Reverse Stand-off Voltage	Breakdown Voltage		Current	Reverse Leakage	Max. Clamp Voltage	Peak Pulse Current
		V <sub>RWM</sub>	V <sub>BR</sub> @I <sub>T</sub>		I <sub>T</sub>	I <sub>R</sub> @V <sub>RWM</sub>	V <sub>C</sub> @I <sub>PP</sub>	I <sub>PP</sub>
			Min	Max				
P4SMAFJ85A	RV	85	94.4	108	1.0	1.0	137	2.9
P4SMAFJ90A	RX	90	100	116	1.0	1.0	146	2.7
P4SMAFJ100A	RZ	100	111	128	1.0	1.0	162	2.5
P4SMAFJ110A	SE	110	122	141	1.0	1.0	177	2.3
P4SMAFJ120A	SG	120	133	153	1.0	1.0	193	2.0
P4SMAFJ130A	SK	130	144	166	1.0	1.0	209	1.9
P4SMAFJ150A	SM	150	167	193	1.0	1.0	243	1.6
P4SMAFJ160A	SP	160	178	205	1.0	1.0	259	1.5
P4SMAFJ170A	SR	170	189	218	1.0	1.0	275	1.4

**P4SMAFJ8.5A~P4SMAFJ170A**  
Rev.F May.-2019

**P4SMAFJ8.5A~P4SMAFJ170A**


Rev.F May.-2019

**DATA SHEET**

/ Marking Instructions

Type number	Marking
P4SMAFJ8.5A	HT
P4SMAFJ9.0A	HV
P4SMAFJ10A	HX
P4SMAFJ11A	HZ
P4SMAFJ12A	IA
P4SMAFJ13A	IG
P4SMAFJ14A	IK
P4SMAFJ15A	IM
P4SMAFJ16A	IP
P4SMAFJ17A	IC
P4SMAFJ18A	IR
P4SMAFJ19A	IS
P4SMAFJ20A	IT
P4SMAFJ21A	IY
P4SMAFJ22A	IZ
P4SMAFJ24A	JA
P4SMAFJ26A	JE
P4SMAFJ28A	JG
P4SMAFJ30A	JK
P4SMAFJ32A	JM
P4SMAFJ34A	JN
P4SMAFJ36A	JO
P4SMAFJ38A	JP
P4SMAFJ40A	JR
P4SMAFJ43A	JT
P4SMAFJ45A	JV
P4SMAFJ48A	JX
P4SMAFJ51A	JZ
P4SMAFJ54A	RE
P4SMAFJ58A	RG
P4SMAFJ60A	RK
P4SMAFJ64A	RM
P4SMAFJ70A	RP
P4SMAFJ75A	RS
P4SMAFJ78A	RT
P4SMAFJ85A	RV
P4SMAFJ90A	RX
P4SMAFJ100A	RY
P4SMAFJ110A	RA
P4SMAFJ120A	SG
P4SMAFJ130A	SK
P4SMAFJ150A	SM
P4SMAFJ160A	SN
P4SMAFJ170A	SB

/ Marking Instructions

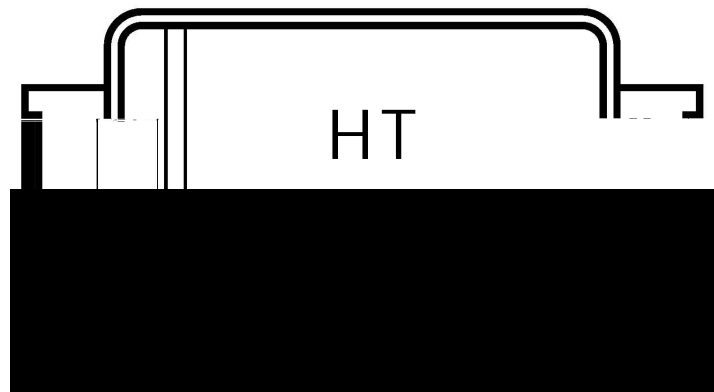

HT

\*\*\*\*

1 \*

3 \*


Note:

HT Product Type Code

\*\*\*\*

Lot No. Code The 1st \* means:YM Code The last 3 \* means:little Lot No  
Code

( ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

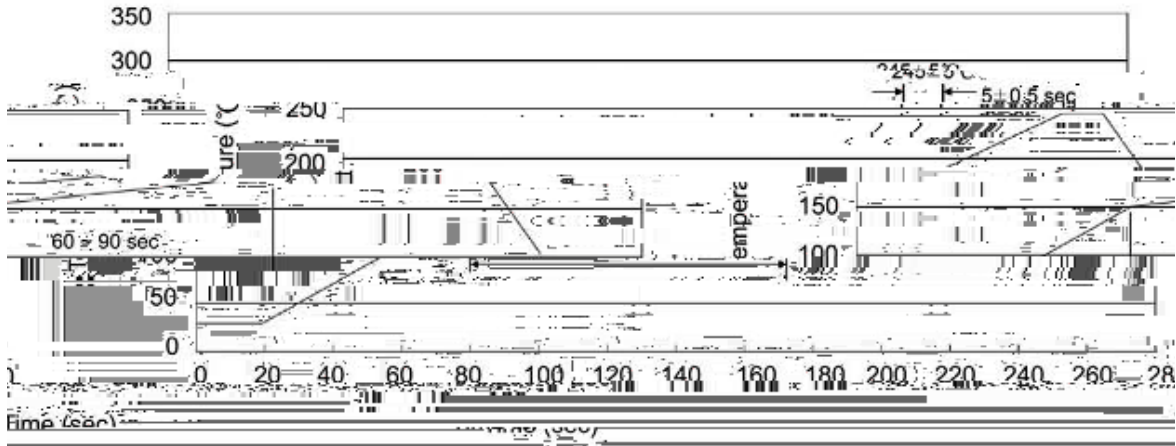

Note:

- |   |         |           |   |
|---|---------|-----------|---|
| 1 | 150 180 | 60 90sec; | 1.Preheating:150~180 , Time:60~90sec.   |
| 2 | 245±5   | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | 2 10    | /sec.     | 3. Cooling Speed: 2~10 /sec.            |

/ Resistance to Soldering Heat Test Conditions

260±5                      10±1 sec.                      Temp.:260±5                      Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units	Dimension	(unit mm <sup>3</sup> )
--------------	-------	-----------	-------------------------