

Rev.A Apr.-2018

50V~1000V


3.0A SMB

Surface Mount General Purpose Silicon Rectifiers, Reverse Voltage 50 to1000V,Forward Current:3.0A ,SMB package.

RoHS 2011/65/EU


Glass Passivated Chip Junction, Lead free in comply with EU RoHS 2011/65/EU directives, For surface mounted applications. Halogen free product.

General purpose.



PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

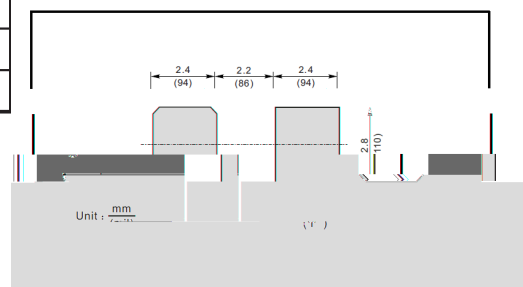


See Marking Instructions.


Rev.A Apr.-2018

Parameter

Rev.A Apr.-2018

SMB

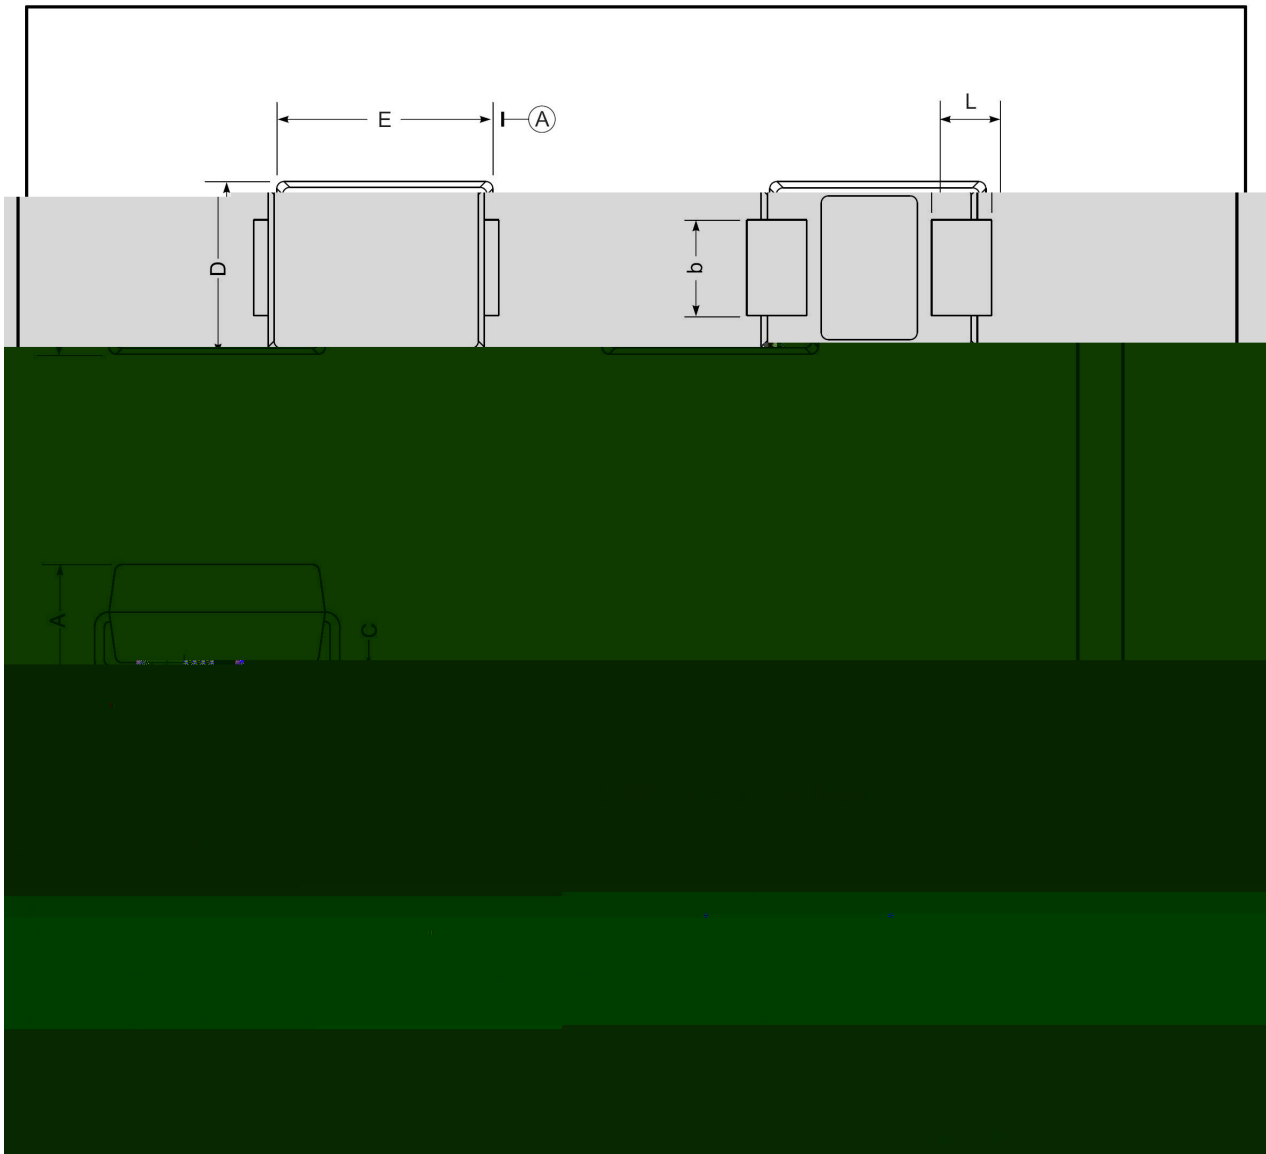

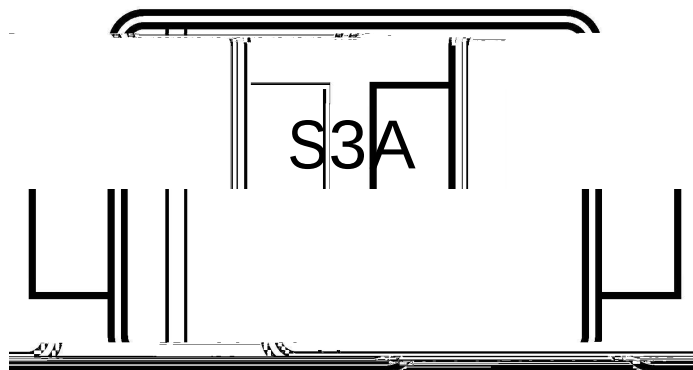

S3A

1 *

3 *


Note:

S3A Product Type Code

Lot No. Code The 1st * means:YM Code The last 3 * means:little Lot No
Code

Rev.A Apr.-2018

Temperature Profile for IR Reflow Soldering(Pb-Free)

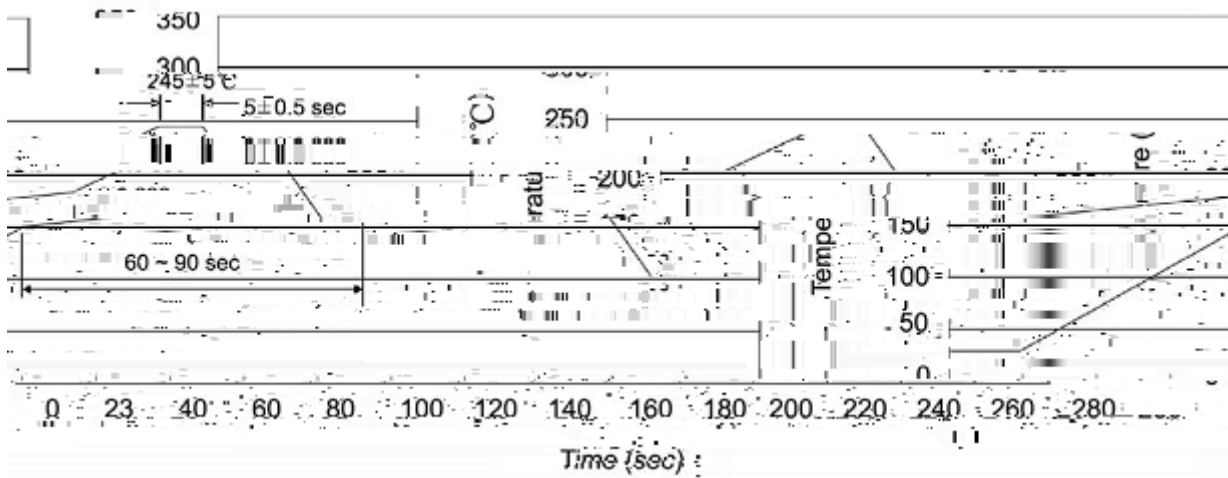

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

260±5	10±1 sec.	Temp.:260±5	Time:10±1 sec
-------	-----------	-------------	---------------

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SMB	3000	5	15000	5	75000	7 ×11	185X180X105	390X385X205